

1

2



3

注記

- △ 1. 本部品は、7182-8700-30, 7283-8700-30,
7283-8701-40に組み付けられる。

NOTE

- △ 1. THIS PART TO BE ASSEMBLED WITH
7182-8700-30, 7283-8700-30, 7283-8701-40.

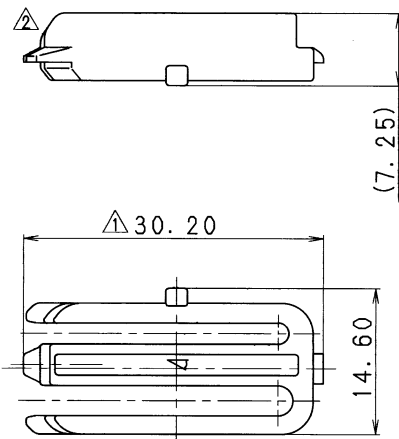

ISSUE MARK

△	96.01.29	CHANGED FORM	C96-L182	Y. Y	CUSTOMER	MATL. SPEC.	PBT (BROWN)	TREAT. & FIN.
△	95.06.15	CHANGED FORM & ADDED PART NO., [A]	C95-L964	K. S	CUSTOMER PART NO.	CUSTOMER DWG NO.		
	91.01.31	NEW	C90-M166	T. K	OFFICE	TRIAL PART NO.	NAME	SSD 6P+090 II 4P CONNECTOR
LET	DATE	REVISION RECORD	NO.	CHKD	VENDOR			REAR HOLDER
GENERAL TOLERANCE					VENDOR NO.			
	10MAX	50MAX	100MAX	250MAX	2500VR	ANGLE	ECCENT	DWG TYPE
A	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1	R
B	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1	APPROVED
(C)	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15	CHECKED
SPECIFIED					MASS	g	96.02.02	96.02.01
							96.02.01	96.02.01
							91.01.31	96.01.29
							DESIGN	DRAWN
							KANEKO	HIRATA
								YAZAKI CORPORATION

1

2

3