


N = Number of poles


Dim A=Nx3.5

Dim B=(N-1)x3.5

Poles	Dim A	Dim B
2-6p	±0.15	±0.15
7-12p	±0.25	±0.25
13-18p	±0.35	±0.35
19-24p	±0.40	±0.40

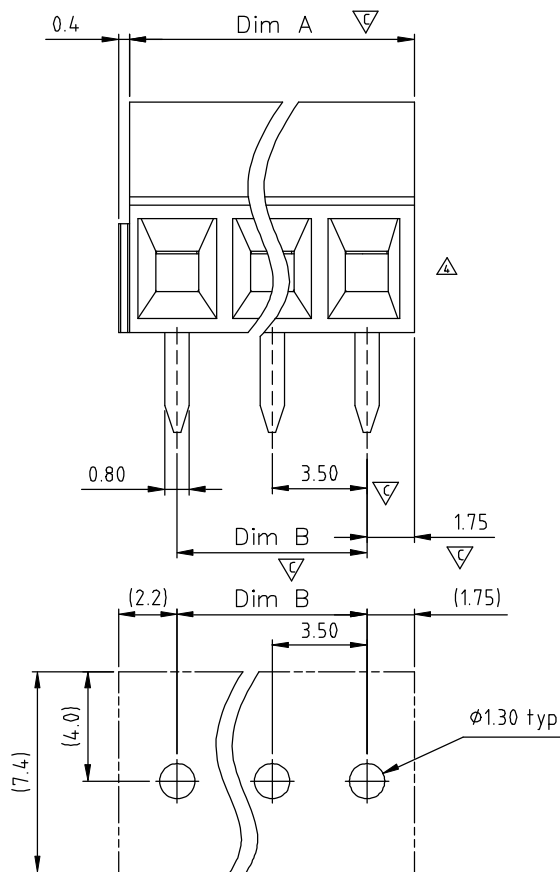

P.C.B. LAYOUT
TOP VIEW

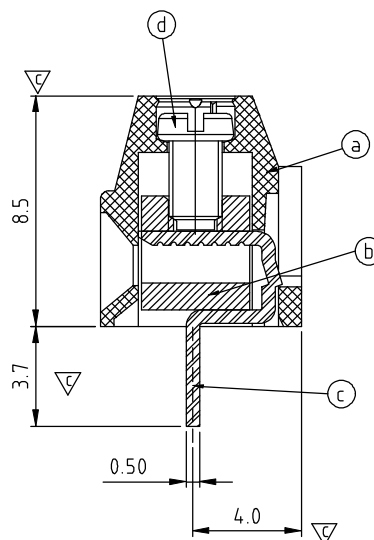

SIGN	DATE	DESCRIPTION	APPROVER
△	01/26'10	Soldering temperature changed from 245°C to 250°C	Tason
△	01/26'10	Part No. is changed	Tason
△	03/18'11	Add is " TUV " and Torque is changed	Juany
△	01/08'14	change the structure	Guoxue

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item① Terminal housing :Thermoplastic (UL 94V-0)
- Item② Clamp : Brass,Ni plated
- Item③ Wire guard solder pin : Brass,Tin plated
- Item④ Terminal screw: Steel Zinc plating"-slot type

△ Electrical cULus / TUV

- Voltage rating: 300V / 300V
- Current rating: 10A / 12A
- Wire range: 0.2~1.5mm²
- Solid wire(AWG): 16-24
- Stranded wire(AWG): 16-24

△ ● Torque: 1.7 Lb-In / 0.2Nm (stackable type: 1.5Kgf·cm)

● Screw: M2

● Wire strip length: 5-6mm

● Withstanding Voltage: 1.6KV / 1.25KV

● Operating temperature: -40°C to +115°C

△ ● Soldering temperature: 260°C±5°C/5 Sec

● Safety Approval: cULus △ TUV

● Critical dimension: △

△ YO xx 01 x 0 xxxx G

RoHS compliant
(lead<4%)
In copper Alloy

No. of poles

02 2 POLES

03 3 POLES

...

24 24 POLES

0 Black (RAL9005)

2 Red (RAL3001/D)

3 Orange(RAL2011/P)

4 Yellow(RAL1018/A)

5 Green(RAL6018/T)

6 Blue (RAL5015/A)

8 Grey(RAL7035/D)

9 White(RAL1102)

C Green(RAL6018/U)

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YO 3.5 Series 2P-24P							
PART NO.	YOxx01x0xxxxG			DWG NO.	8Y00001			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance	
		Guoxue 2014.01.25	Guoxue 2014.01.25		UNIT: mm		X. ±0.50	
					SCALE: NONE		X.X ±0.30	
					REV.: G		X.XX ±0.10	
				SHEET: 01/01		X° ±1°		