

REVISIONS					
P	LTR	DESCRIPTION	DATE	DNB	APVD
	F1	REVISED PER ECO-16-011475	11AUG2016	NK	JO
	G	REVISED PER ECR-22-137476	23AUG2022	RK	SD

1 GLASS FILLED THERMOPLASTIC, UL 94-V0 RATED, COLOR: BLACK

2 VOID CORING PERMISSIBLE IN POLARIZATION BAR.

3 OBSOLETE PARTS:OBSOLETE CIS STREAMLININF PER D.RENAUD/D.SINISI

4 THE PRODUCT IS IN PROCESS FOR UL RECOGNITION.







5 THE PRODUCT IS NOT YET QUALIFIED AND IS IN PROCESS.

2 VOID CORING PERMISSIBLE IN POLARIZATION BAR.

3 OBSOLETE PARTS:OBSOLETE CIS STREAMLININF PER D.RENAUD/D.SINISI

4 THE PRODUCT IS IN PROCESS FOR UL RECOGNITION.

5 THE PRODUCT IS NOT YET QUALIFIED AND IS IN PROCESS

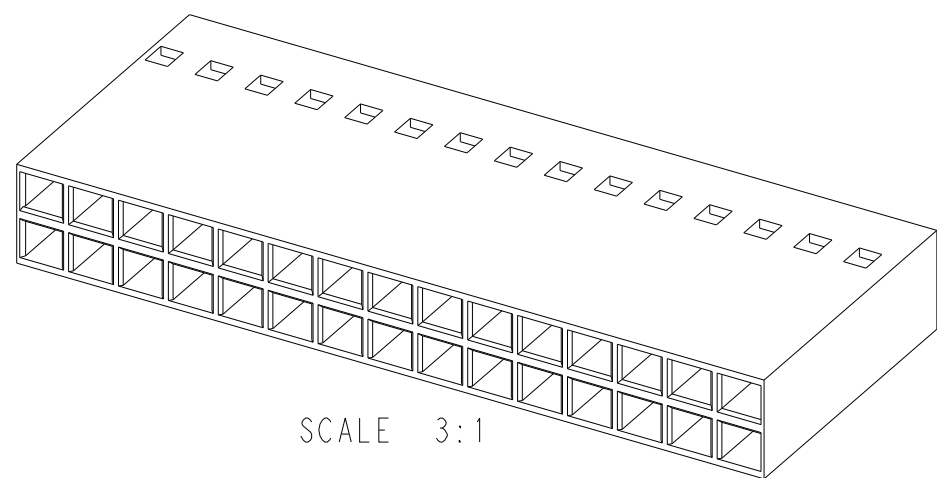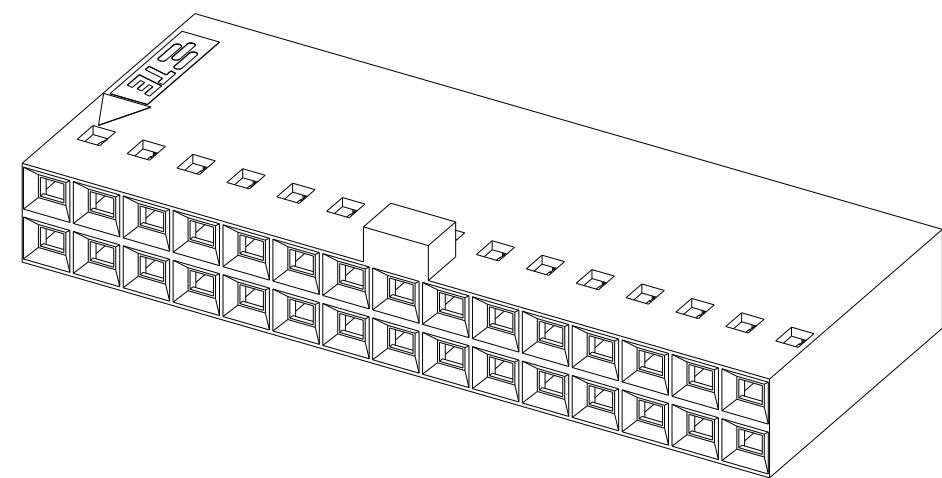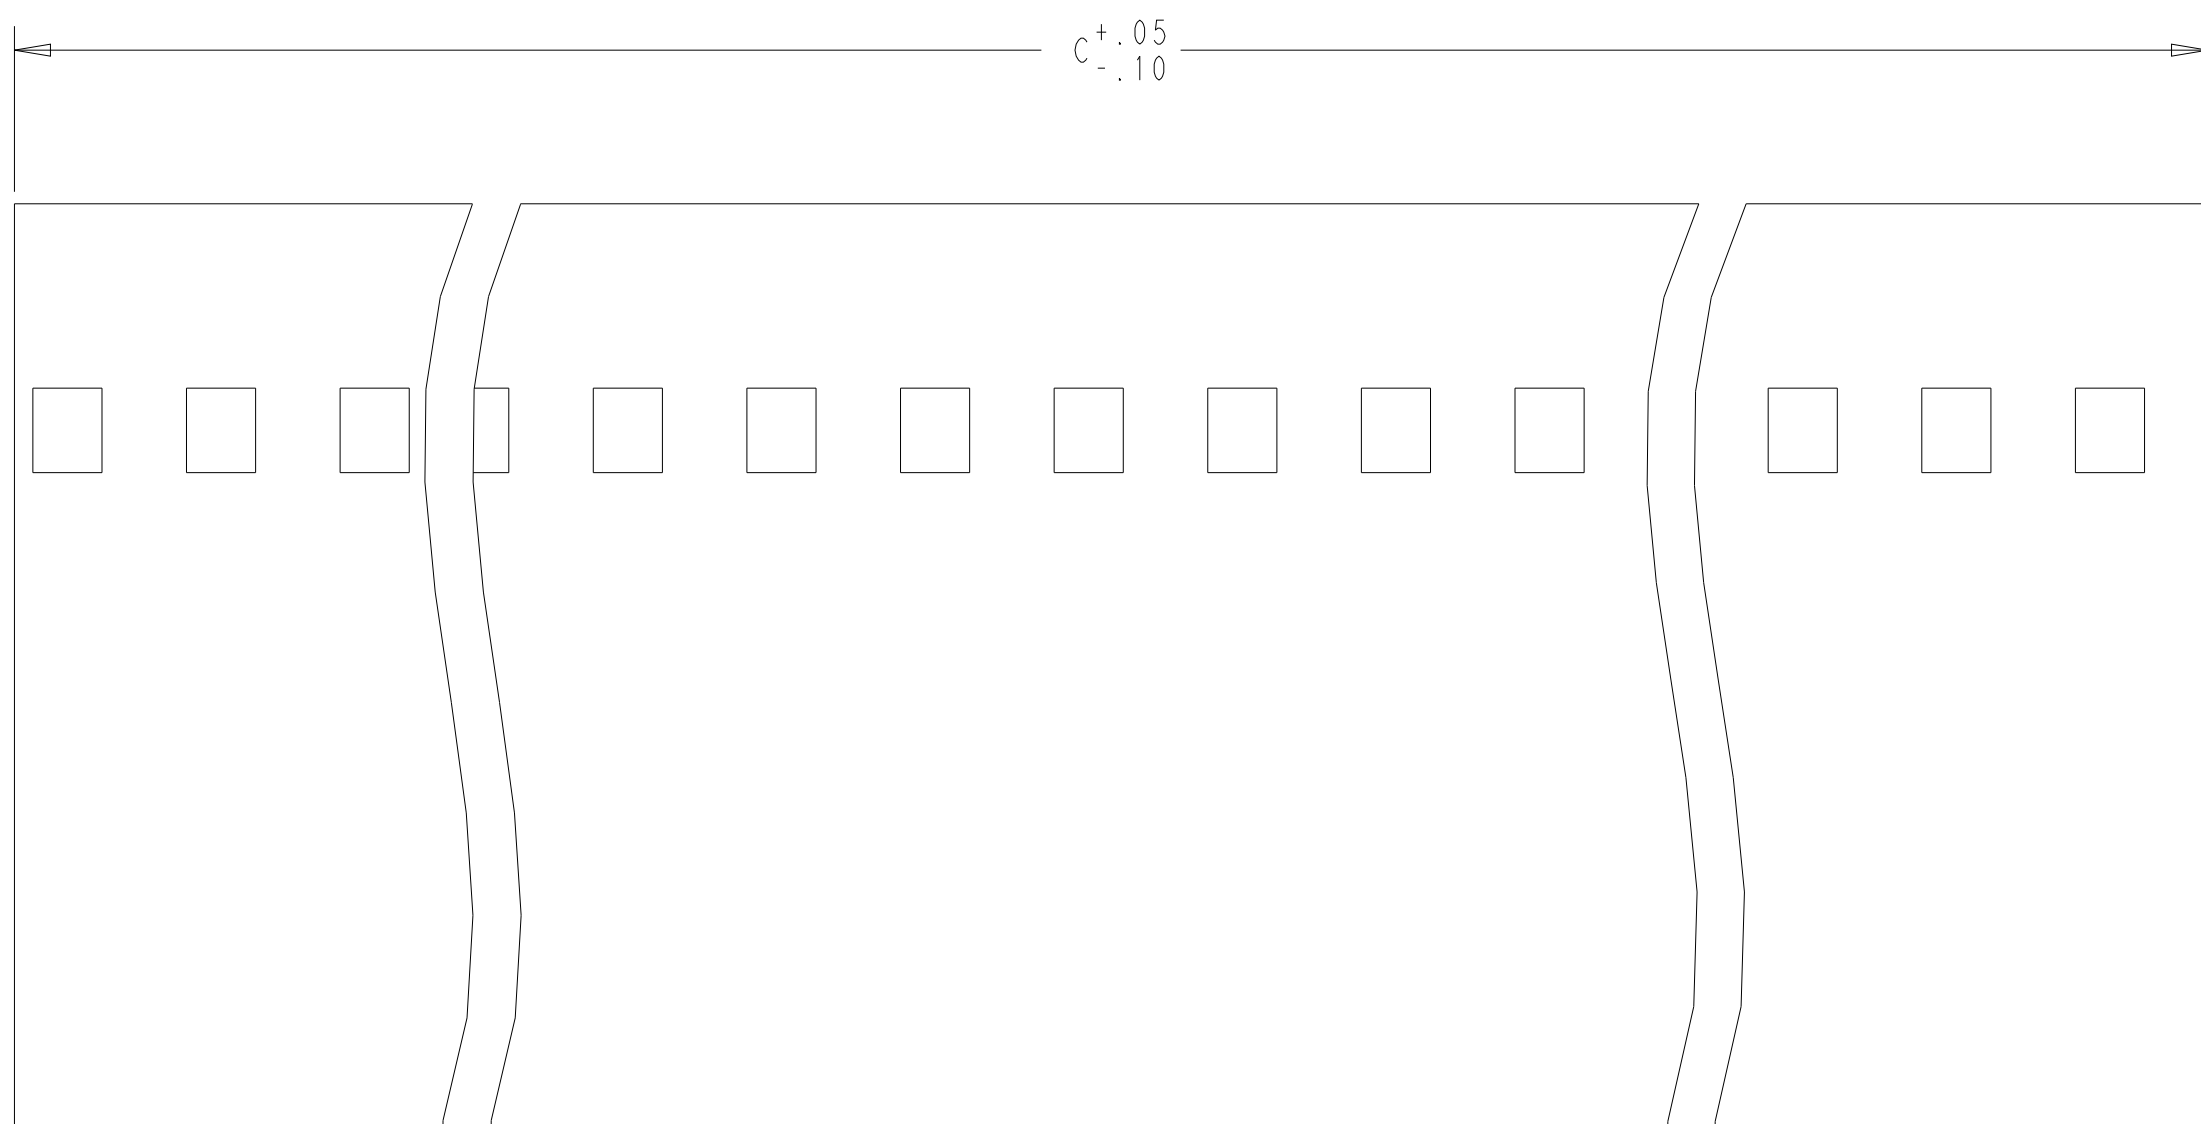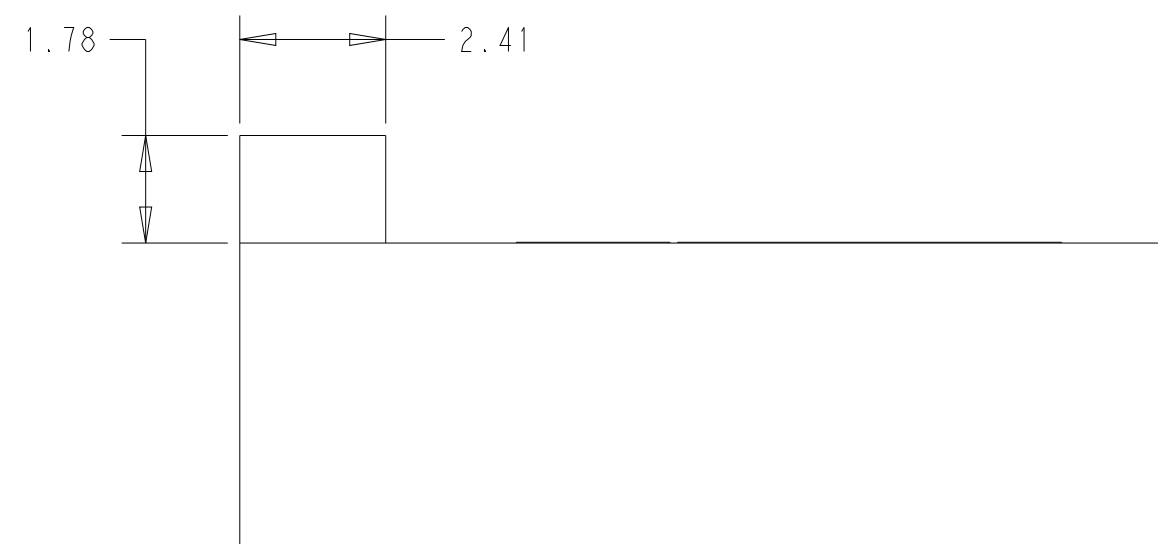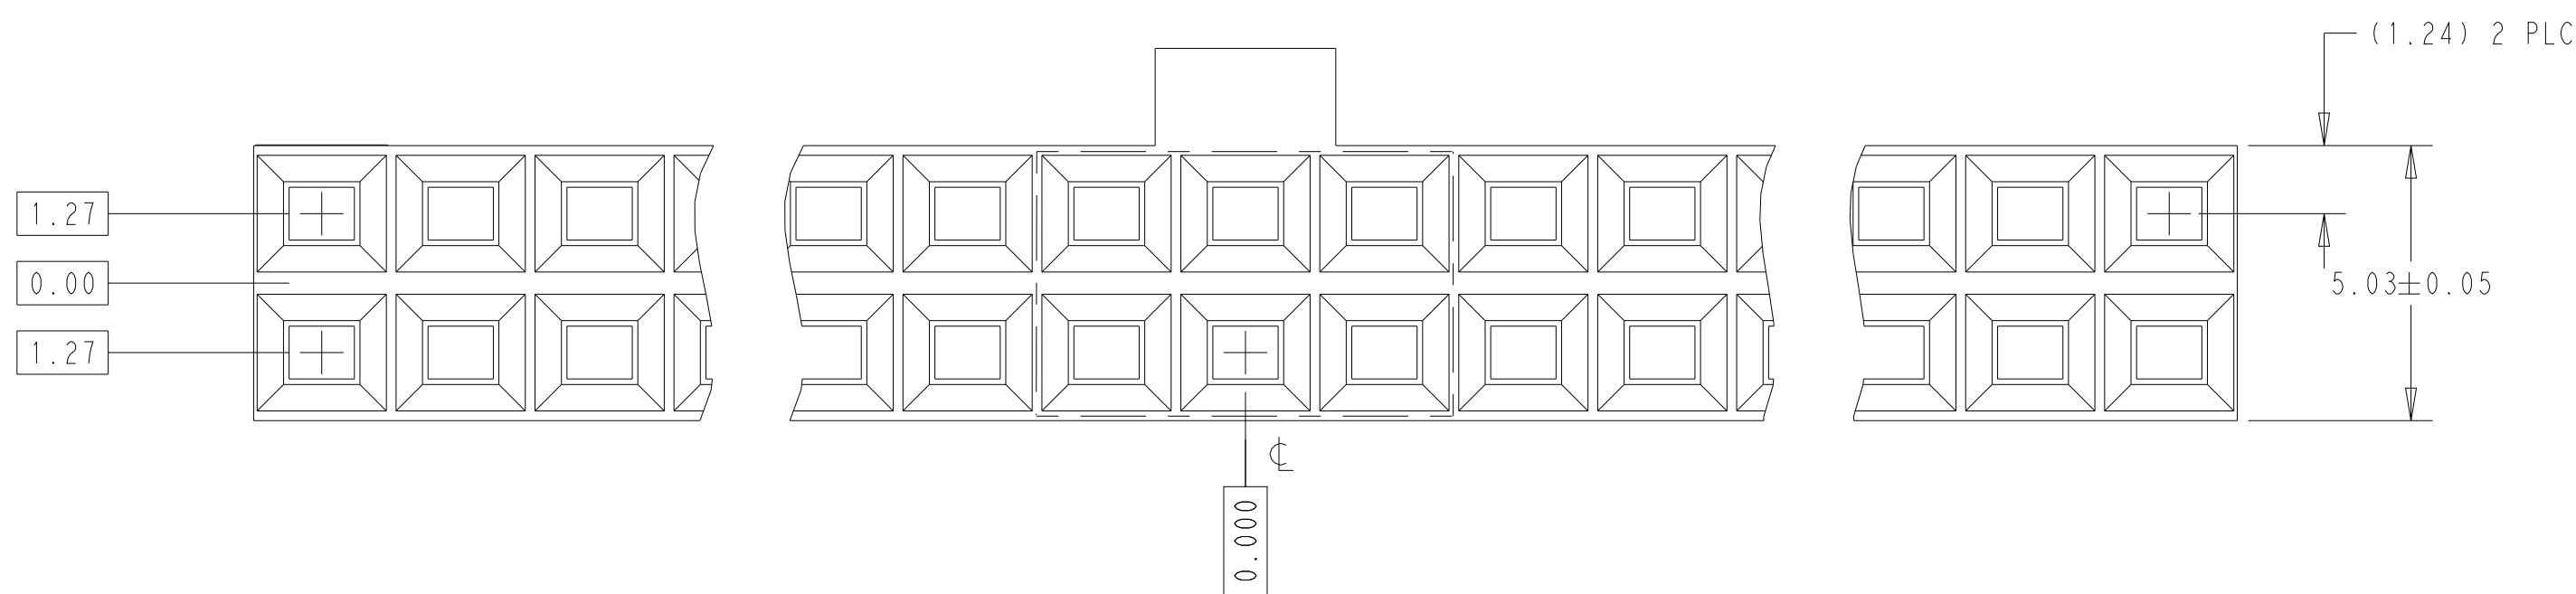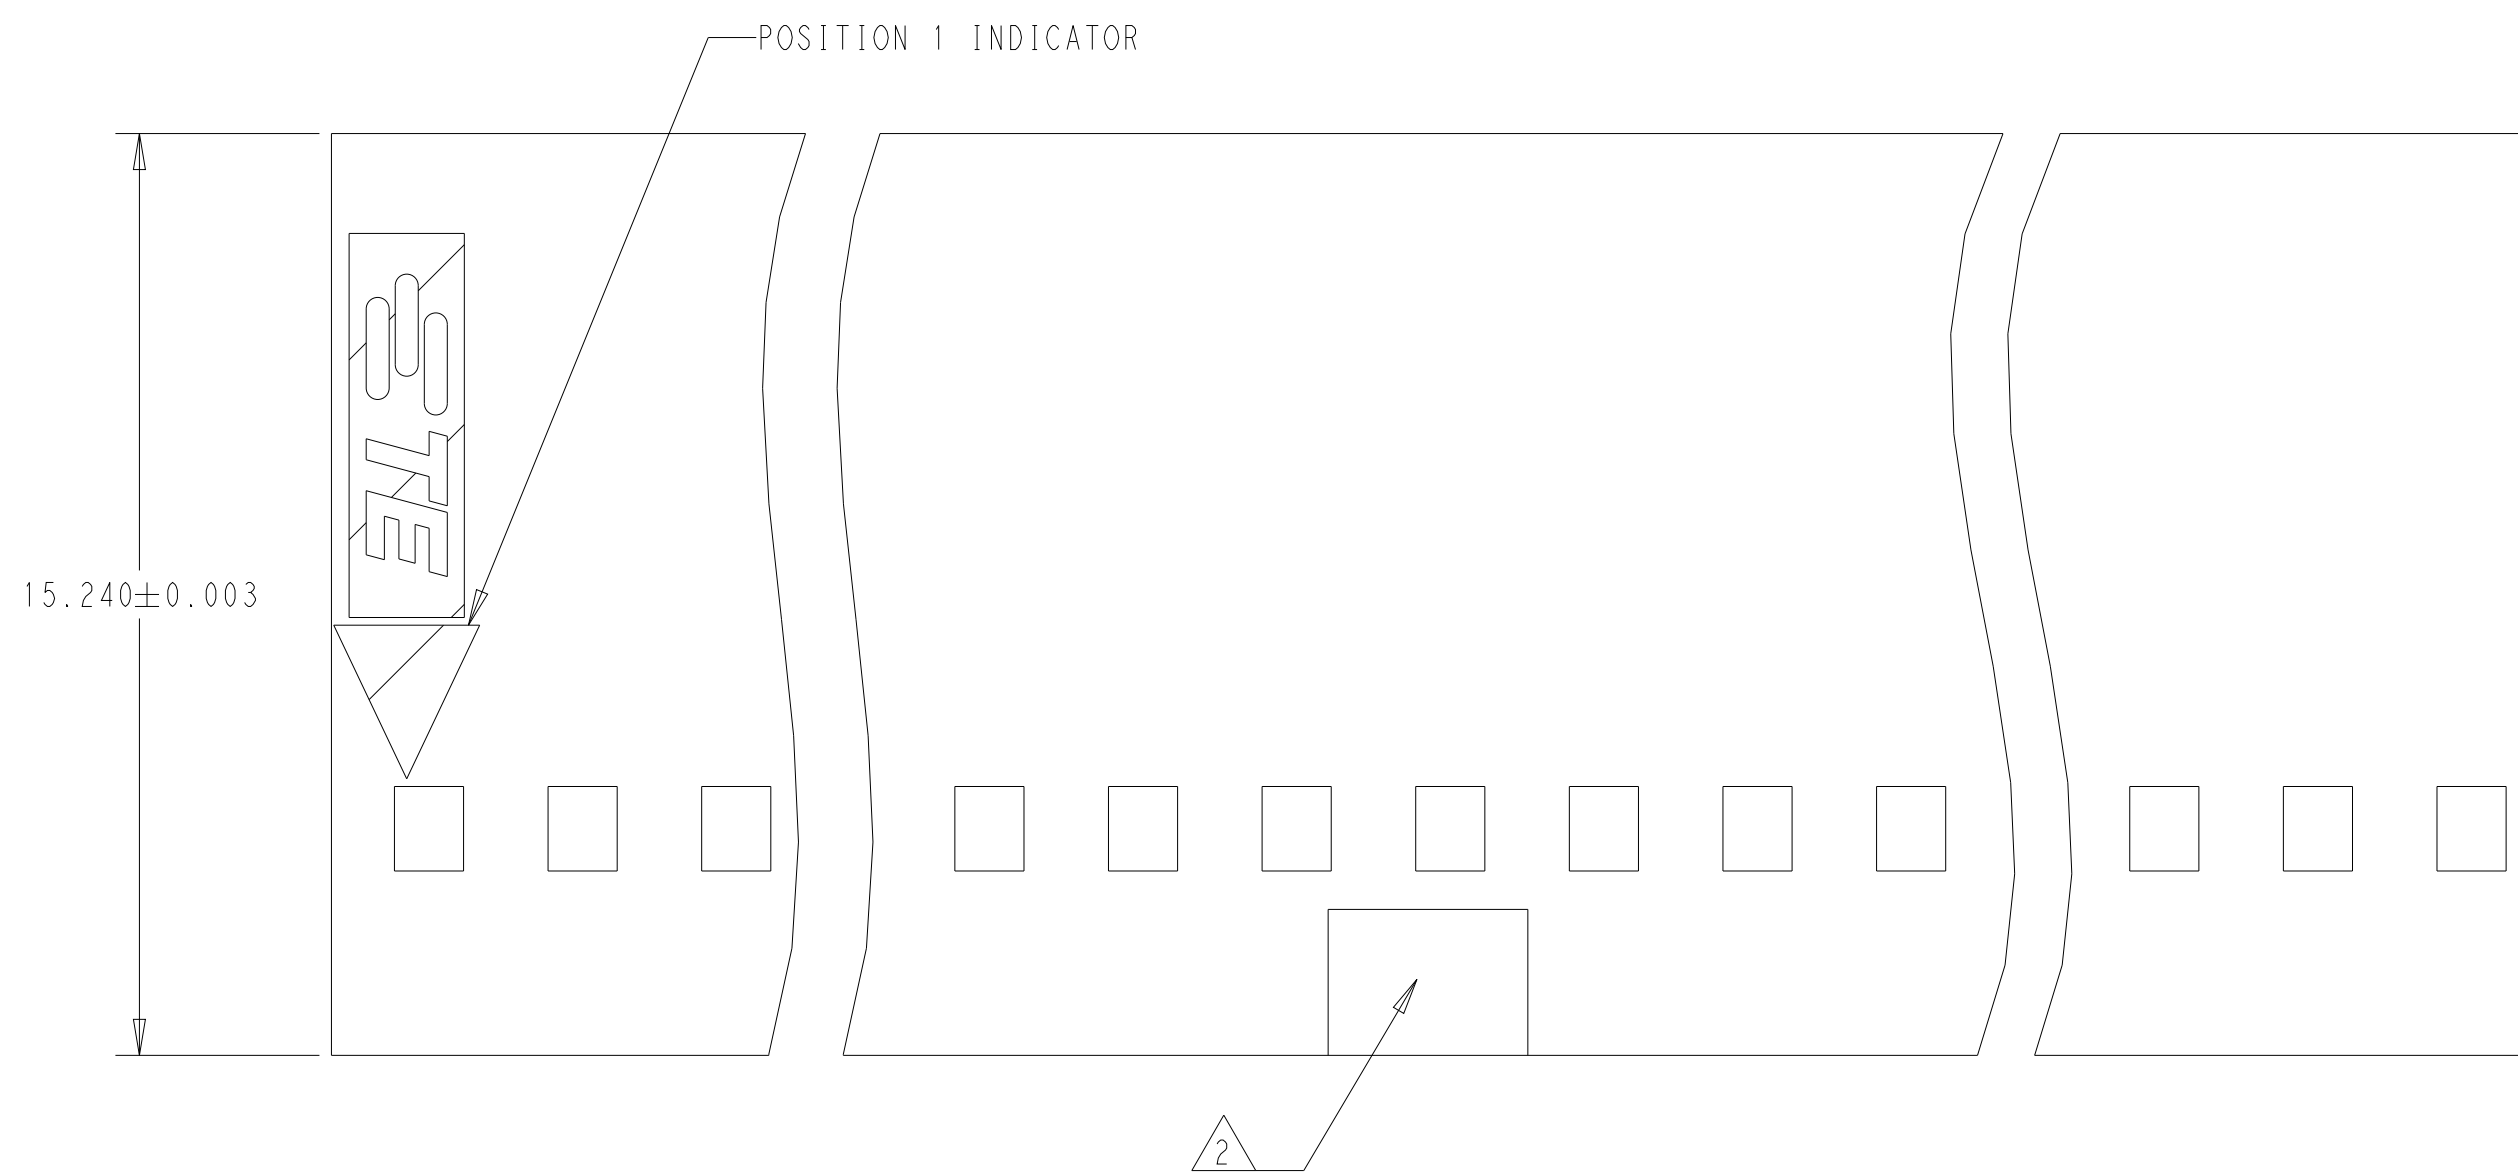

	45.67	17	36	1-104483-5
	45.67	17	36	1-104483-4
	63.45	24	50	1-104483-3
	15.19	5	12	1-104483-2
	12.65	4	10	1-104483-1
	65.99	25	52	1-104483-0
	17.73	6	14	104483-9
	81.23	31	64	104483-8
	68.53	26	54	104483-7
	48.21	18	38	104483-6
	38.05	14	30	104483-5
	32.97	12	26	104483-4
	25.35	9	20	104483-3
22.81	8	18	104483-2	
10.11	3	8	104483-1	
	DIM "C"	NO OF SP	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SCOTT A. SHUEY 17MAY89 CHG H. MOLL 18MAY89		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ±.005 4 PLC ± ANGLES ± FINISH		NAME RCPT HSG, DBL ROW, PLZD, 2.54x2.54 CL, SHORT PT, AMPMODU	
		APD R. FLICKER 18MAY89 PRODUCT SPEC - APPLICATION SPEC		SIZE CAGE CODE DRAWING NO A 00779 C=104483	
MATERIAL 		WEIGHT -		RESTRICTED TO -	
		CUSTOMER DRAWING		SCALE 8:1 SHEET 1 OF 1 REV G	