
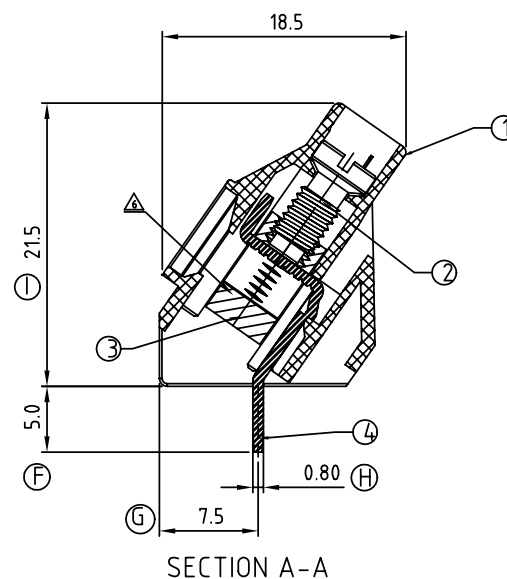
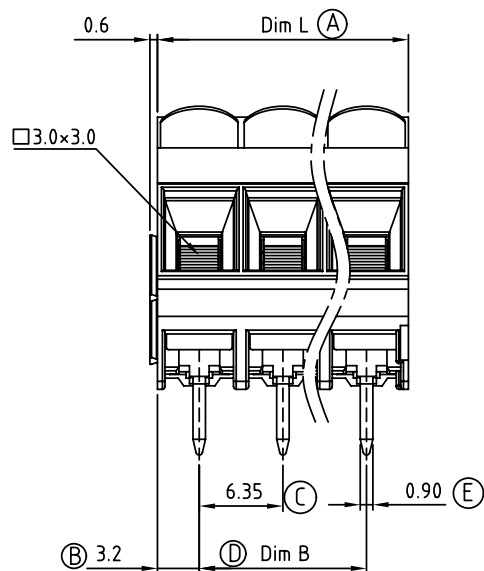
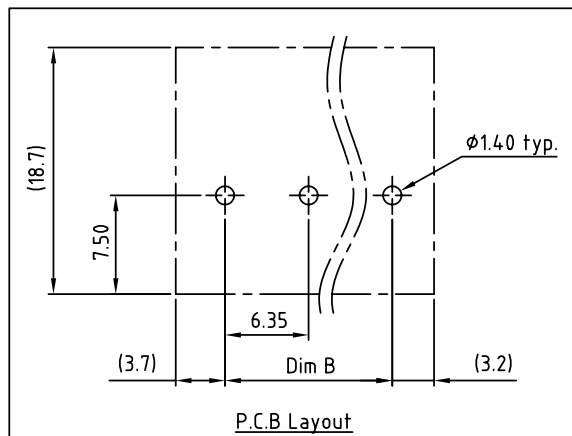




SIGN	DATE	DESCRIPTION	APPROVER
△	7/4/09	Current, torque are changed	Jody
△	7/4/09	Add safety approval	Jody
△	9/14/09	Clamp is changed from Steel to Brass	Aaron
△	9/14/09	Wire guard solder pin is changed from Brass to Copper	Aaron
△	02/22/10	Torque is changed from 8.9Lb-In to 6.9Lb-In	Aaron
△	08/03/10	Clamp is changed	Aaron
△	12/13/10	Add is " TUV "	Chen Bo

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Item 1 Terminal housing: Thermoplastic (UL94V-0)
- Item 2 Terminal screw: Steel Zinc plating "-" slot type
- △ ● Item 3 Clamp: Brass, Ni plated
- △ ● Item 4 Wire guard solder pin: Copper, Tin plated
- △ Electrical cULus TUV
- Voltage rating: 300VAC 450VAC
- △ ● Current rating: 30A 41A
- Wire range: 0.20-6.0mm²
- Solid wire(AWG): 10-24
- Stranded wire(AWG): 10-24
- △ △ ● Torque(Lb-In): 6.9 0.85 N.m
- Screw: M3.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV 2.5KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: cULus TUV

T7 xx 03 x 1 xxxx G

No. of poles end stackable design	0 Black (RAL9005)	0000 Standard @ Logo
02 2 CONTACTS	2 Red (RAL3001/D)	000A Standard ANY Logo
03 3 CONTACTS	3 Orange(RAL2011/P)	Any special item by customer request, please contact sales department.
...	4 Yellow(RAL1018/A)	
16 16 CONTACTS	5 Green(RAL6018/T)	
	6 Blue(RAL5015/A)	
	8 Grey(RAL7035/D)	

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

Poles	02	03	04	05	06	07	08	09	10	11	12	13	14	15	16
Dim L	12.70	19.05	25.40	31.75	38.10	44.45	50.80	57.15	63.50	69.85	76.20	88.90	88.90	95.25	101.6
Dim B	6.35	12.70	19.05	25.40	31.75	38.10	44.45	50.80	57.15	63.50	69.85	76.20	82.55	88.90	95.25
TOL	±0.15					±0.25					±0.35				

TITLE	T7-6.35 Series 2P-16P 45D									
PART NO.	T7xx03x1xxxxG				DWG NO.	8T70501				
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.					Tolerance	
			Chen Bo 2010.12.13						UNIT: mm	
					SCALE: NONE		X.X	±0.30		
					SHEET: 01/01		REV.: F	X.XX	±0.10	
							X°	±1°		