

Technical drawing of a component area (front view). The drawing includes the following dimensions and tolerances:

- Overall width: 67.6 ± 0.15
- Overall height: 25.4 ± 0.15
- Internal width segments: 21.15 , 9 , 63.6
- Internal height segments: 4 , 2.55 , 2.25 , 0.15
- Pin locations: PIN 1, PIN 203, PIN 204
- Feature B: 0.03 ± 0.05
- Feature A: 0.15 ± 0.1
- Feature C: 0.15 ± 0.1
- Feature D: 0.15 ± 0.1
- Feature E: 0.15 ± 0.1
- Feature F: 0.15 ± 0.1
- Feature G: 0.15 ± 0.1
- Feature H: 0.15 ± 0.1
- Feature I: 0.15 ± 0.1
- Feature J: 0.15 ± 0.1
- Feature K: 0.15 ± 0.1
- Feature L: 0.15 ± 0.1
- Feature M: 0.15 ± 0.1
- Feature N: 0.15 ± 0.1
- Feature O: 0.15 ± 0.1
- Feature P: 0.15 ± 0.1
- Feature Q: 0.15 ± 0.1
- Feature R: 0.15 ± 0.1
- Feature S: 0.15 ± 0.1
- Feature T: 0.15 ± 0.1
- Feature U: 0.15 ± 0.1
- Feature V: 0.15 ± 0.1
- Feature W: 0.15 ± 0.1
- Feature X: 0.15 ± 0.1
- Feature Y: 0.15 ± 0.1
- Feature Z: 0.15 ± 0.1
- Feature AA: 0.15 ± 0.1
- Feature AB: 0.15 ± 0.1
- Feature AC: 0.15 ± 0.1
- Feature AD: 0.15 ± 0.1
- Feature AE: 0.15 ± 0.1
- Feature AF: 0.15 ± 0.1
- Feature AG: 0.15 ± 0.1
- Feature AH: 0.15 ± 0.1
- Feature AI: 0.15 ± 0.1
- Feature AJ: 0.15 ± 0.1
- Feature AK: 0.15 ± 0.1
- Feature AL: 0.15 ± 0.1
- Feature AM: 0.15 ± 0.1
- Feature AN: 0.15 ± 0.1
- Feature AO: 0.15 ± 0.1
- Feature AP: 0.15 ± 0.1
- Feature AQ: 0.15 ± 0.1
- Feature AR: 0.15 ± 0.1
- Feature AS: 0.15 ± 0.1
- Feature AT: 0.15 ± 0.1
- Feature AU: 0.15 ± 0.1
- Feature AV: 0.15 ± 0.1
- Feature AW: 0.15 ± 0.1
- Feature AX: 0.15 ± 0.1
- Feature AY: 0.15 ± 0.1
- Feature AZ: 0.15 ± 0.1
- Feature BA: 0.15 ± 0.1
- Feature BB: 0.15 ± 0.1
- Feature BC: 0.15 ± 0.1
- Feature BD: 0.15 ± 0.1
- Feature BE: 0.15 ± 0.1
- Feature BF: 0.15 ± 0.1
- Feature BG: 0.15 ± 0.1
- Feature BH: 0.15 ± 0.1
- Feature BI: 0.15 ± 0.1
- Feature BJ: 0.15 ± 0.1
- Feature BK: 0.15 ± 0.1
- Feature BL: 0.15 ± 0.1
- Feature BM: 0.15 ± 0.1
- Feature BN: 0.15 ± 0.1
- Feature BO: 0.15 ± 0.1
- Feature BP: 0.15 ± 0.1
- Feature BQ: 0.15 ± 0.1
- Feature BR: 0.15 ± 0.1
- Feature BS: 0.15 ± 0.1
- Feature BT: 0.15 ± 0.1
- Feature BU: 0.15 ± 0.1
- Feature BV: 0.15 ± 0.1
- Feature BW: 0.15 ± 0.1
- Feature BX: 0.15 ± 0.1
- Feature BY: 0.15 ± 0.1
- Feature BZ: 0.15 ± 0.1
- Feature CA: 0.15 ± 0.1
- Feature CB: 0.15 ± 0.1
- Feature CC: 0.15 ± 0.1
- Feature CD: 0.15 ± 0.1
- Feature CE: 0.15 ± 0.1
- Feature CF: 0.15 ± 0.1
- Feature CG: 0.15 ± 0.1
- Feature CH: 0.15 ± 0.1
- Feature CI: 0.15 ± 0.1
- Feature CJ: 0.15 ± 0.1
- Feature CK: 0.15 ± 0.1
- Feature CL: 0.15 ± 0.1
- Feature CM: 0.15 ± 0.1
- Feature CN: 0.15 ± 0.1
- Feature CO: 0.15 ± 0.1
- Feature CP: 0.15 ± 0.1
- Feature CQ: 0.15 ± 0.1
- Feature CR: 0.15 ± 0.1
- Feature CS: 0.15 ± 0.1
- Feature CT: 0.15 ± 0.1
- Feature CU: 0.15 ± 0.1
- Feature CV: 0.15 ± 0.1
- Feature CW: 0.15 ± 0.1
- Feature CX: 0.15 ± 0.1
- Feature CY: 0.15 ± 0.1
- Feature CZ: 0.15 ± 0.1
- Feature DA: 0.15 ± 0.1
- Feature DB: 0.15 ± 0.1
- Feature DC: 0.15 ± 0.1
- Feature DD: 0.15 ± 0.1
- Feature DE: 0.15 ± 0.1
- Feature DF: 0.15 ± 0.1
- Feature DG: 0.15 ± 0.1
- Feature DH: 0.15 ± 0.1
- Feature DI: 0.15 ± 0.1
- Feature DJ: 0.15 ± 0.1
- Feature DK: 0.15 ± 0.1
- Feature DL: 0.15 ± 0.1
- Feature DM: 0.15 ± 0.1
- Feature DN: 0.15 ± 0.1
- Feature DO: 0.15 ± 0.1
- Feature DP: 0.15 ± 0.1
- Feature DQ: 0.15 ± 0.1
- Feature DR: 0.15 ± 0.1
- Feature DS: 0.15 ± 0.1
- Feature DT: 0.15 ± 0.1
- Feature DU: 0.15 ± 0.1
- Feature DV: 0.15 ± 0.1
- Feature DW: 0.15 ± 0.1
- Feature DX: 0.15 ± 0.1
- Feature DY: 0.15 ± 0.1
- Feature DZ: 0.15 ± 0.1
- Feature EA: 0.15 ± 0.1
- Feature EB: 0.15 ± 0.1
- Feature EC: 0.15 ± 0.1
- Feature ED: 0.15 ± 0.1
- Feature EE: 0.15 ± 0.1
- Feature EF: 0.15 ± 0.1
- Feature EG: 0.15 ± 0.1
- Feature EH: 0.15 ± 0.1
- Feature EI: 0.15 ± 0.1
- Feature EJ: 0.15 ± 0.1
- Feature EK: 0.15 ± 0.1
- Feature EL: 0.15 ± 0.1
- Feature EM: 0.15 ± 0.1
- Feature EN: 0.15 ± 0.1
- Feature EO: 0.15 ± 0.1
- Feature EP: 0.15 ± 0.1
- Feature EQ: 0.15 ± 0.1
- Feature ER: 0.15 ± 0.1
- Feature ES: 0.15 ± 0.1
- Feature ET: 0.15 ± 0.1
- Feature EU: 0.15 ± 0.1
- Feature EV: 0.15 ± 0.1
- Feature EW: 0.15 ± 0.1
- Feature EX: 0.15 ± 0.1
- Feature EY: 0.15 ± 0.1
- Feature EZ: 0.15 ± 0.1
- Feature FA: 0.15 ± 0.1
- Feature FB: 0.15 ± 0.1
- Feature FC: 0.15 ± 0.1
- Feature FD: 0.15 ± 0.1
- Feature FE: 0.15 ± 0.1
- Feature FF: $0.15 \pm 0.1</$

Figure 1 is a technical drawing of the back view of a component. The drawing shows a rectangular component with a hatched area labeled "COMPONENT AREA (BACK)". Key dimensions and features include:

- Top Dimensions:**
 - Overall width: 39
 - Left section width: 21
 - Central pin width: 3
 - Pin width: 1.35
 - Right section width: 0.6 (PITCH)
- Pin Features:**
 - PIN 2 (left)
 - PIN 204 (right)
 - Pin diameter: $\phi 1.8$ (with ± 0.15 tolerance)
 - Optional holes: $\phi 0.1$ (with ± 0.1 tolerance)
- Bottom Dimensions:**
 - Left section width: 4-2 (MIN.)
 - Right section width: 4-3 (MIN.)
 - Overall height: 4 (MIN.)
 - Internal height: 2 (MIN.)
- Other Features:**
 - Left corner radius: 4-R3 (MIN.)
 - Bottom left corner: 2-FULL R
 - Right side feature: 2-4 (MIN.)

DETAIL B

DETAIL A

DETAIL C

[illegible]

KEYING CENTER

1.65

±0.4



1.35

Z

Technical drawing showing the center line of a connector. The drawing includes dimensions and tolerances for various sections:

- Overall length: ± 0.03 65.6
- Section 1 (Left): ± 0.03 63
- Section 2 (Left): ± 0.03 39, (0.6X65)
- Section 3 (Left): ± 0.03 3.5
- Section 4 (Middle): ± 0.03 3
- Section 5 (Middle): ± 0.03 21, (0.6X35)
- Section 6 (Right): ± 0.03 1.15
- Section 7 (Right): ± 0.03 0.35
- Section 8 (Right): ± 0.03 1.45
- Section 9 (Right): ± 0.03 21, (0.6X35)
- Section 10 (Right): ± 0.03 63
- Section 11 (Right): ± 0.03 39, (0.6X65)
- Section 12 (Right): ± 0.03 0.6 (PITCH)

Labels include "No. 203", "CONNECTOR CENTER LINE", "No. 1", "No. 2", and "No. 204".

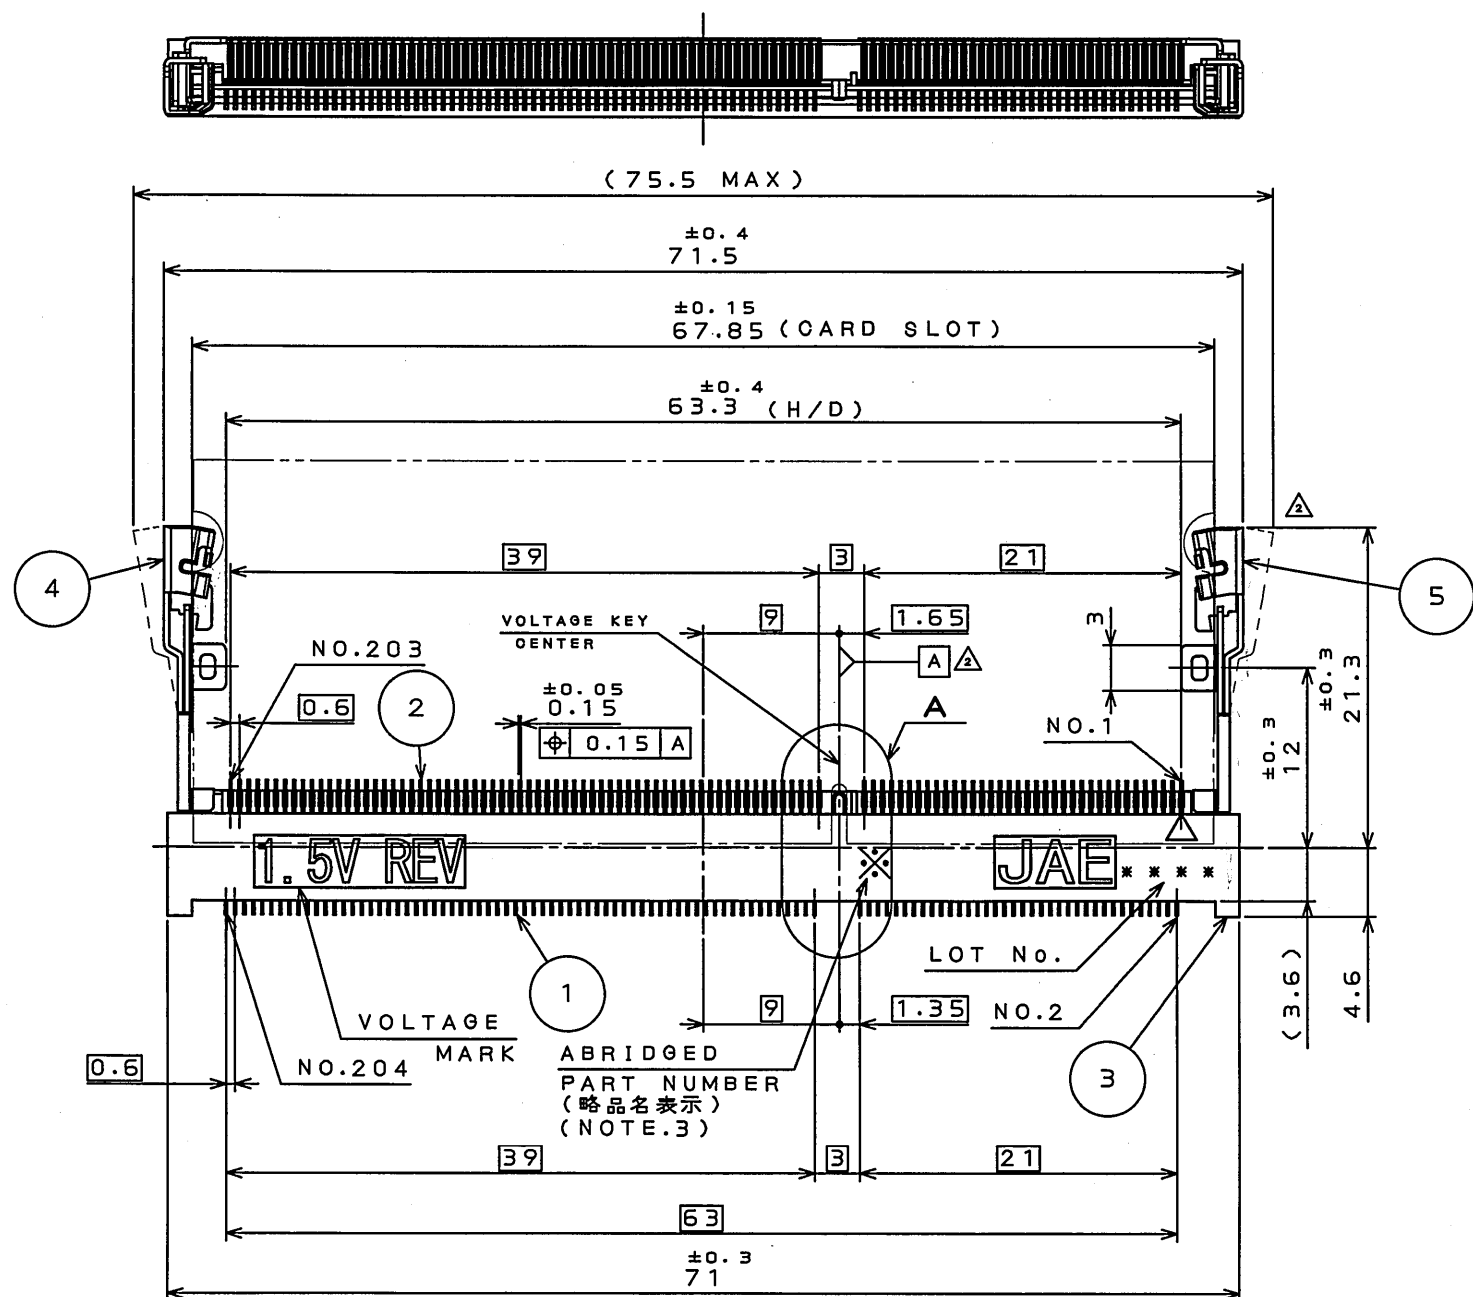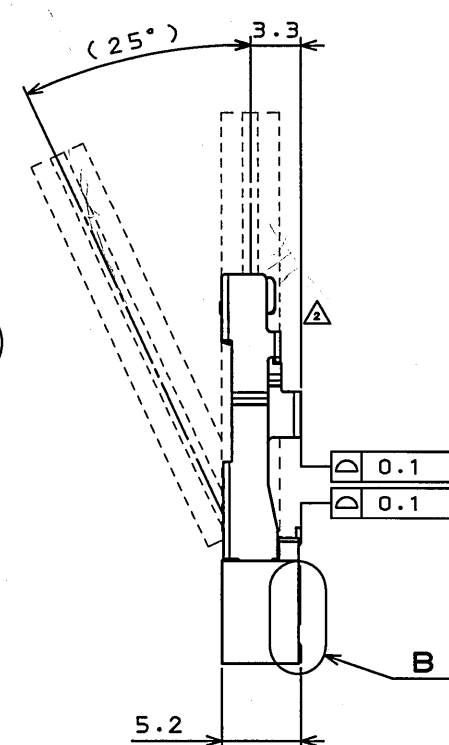

MM80-204B1-1R	
SERIES シリーズ	R : REVERSE NONE : STANDARD
NO. OF CONTACTS 芯数	CONTACT FINISH 接点仕上げ 1: Au(0.1μm MIN) OVER NI
SOCKET TYPE ソケットタイプ B: LATCH TYPE SMT	KEYING TYPE キータイプ 1: 1.5V

NOTE 1. CARD THICKNESS INCLUDES PAD PLATING.
NOTE 2. BEVEL MUST BE FREE OF CUTTING BURRS.
NOTE 3. ABRIDGED PART NUMBER IS DISPLAYED AS BELOW

MM80-204B1-1R

注1. カート^{*}の厚みは、接点部パッドのめっきを含んだ厚みを適用します。
 注2. 先端面取り部は、バリなど無き事。
 注3. 略品名表示は下記下線部分を表示します。

MM80-204B1-1R	略品名