
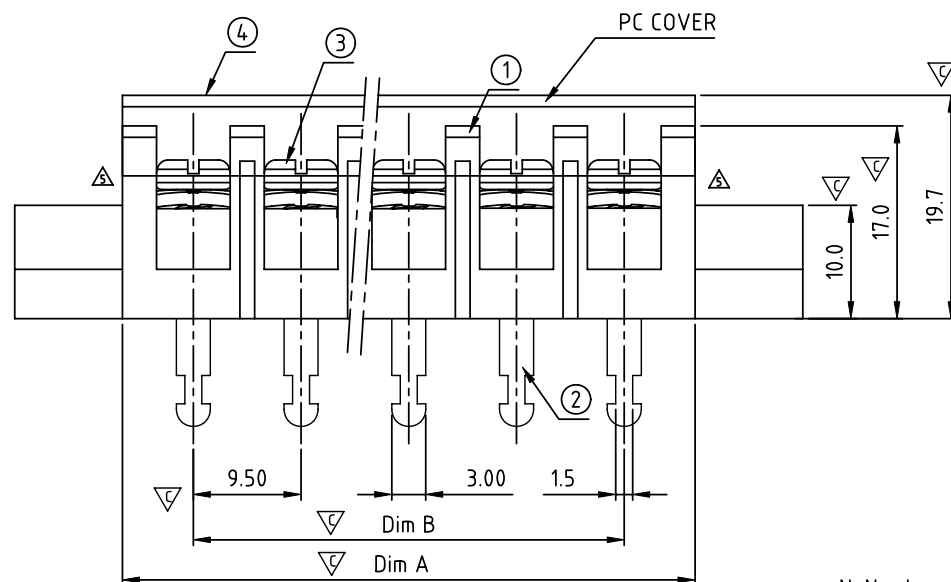


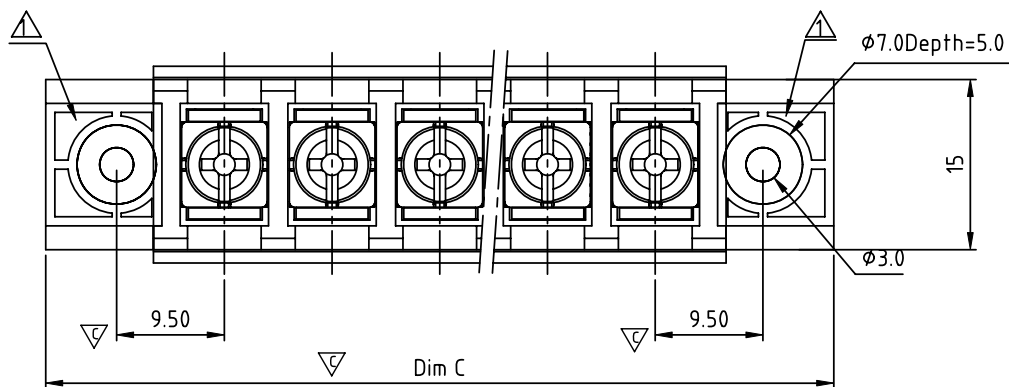

N=Number of poles
Dimension A&B&C

DIM A	$N \times 9.5 + 3.0$
DIM B	$(N-1) \times 9.5$
DIM C	$(N+2) \times 9.5 + 3.0$

Poles	Tolerance
4P	± 0.20
5P-10P	± 0.30
11P-24P	± 0.40
25P-32P	± 0.60

SIGN	DATE	DESCRIPTION	APPROVER
△	04/29'11	The construction is changed here.	Tason
△	10/27'12	Change the dimensional tolerance	Jacky
△	10/27'12	Change the screw plating specification	Jacky
△	06/05'14	Change the dimensional tolerance	Guoxue
△	06/05'14	change the structure	Guoxue
△	08/26'14	The dimensional tolerance is change from 17.4 ± 0.30 to $17.4^{+0.60}_{-0.30}$	Airy min

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

MATERIALS ELECTRICAL

RATED VOLTAGE & CURRENT:	300 V, 20 A
WITHSTAND VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	1000 MΩ OR MORE AT DC 500 V
OPERATING TEMPERATURE RANG:	-40 °C ~ +115 °C
SCREW TORQUE VALUE:	12 Lb-In.
WIRE RANGE:	22 - 12AWG
1) MOLDED PARTS:	THERMOPLASTIC, UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t
3) TERMINAL SCREWS:	STEEL, M3.5
4) COVER MATERIAL:	PC

APPROVAL:

Critical dimension:

PART No.:

YK506 xx 1 x x 00G

NO. OF POLES

04: 4 POLES
05: 5 POLES
06: 6 POLES

...
30: 30 POLES

G:RoHS compliant(lead<4%)
in copper alloy

MARK

0: "@" MARK
1: "ANY" MARK

TERMINAL & SCREW PLATED

0: TERMINAL & SCREW: G/F
△ 1: TERMINAL: G/F, SCREW: Zinc
2: TERMINAL: Sn, SCREW: G/F
△ 3: TERMINAL: Sn, SCREW: Zinc

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	YK-506 With Flange &With Cover Series (4P-30P)						
PART NO.	YK506xx1xx00G			DWG NO.	8YK0002-506		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			
		Airy min 2014.08.26	Airy min 2014.08.26		UNIT: mm	Tolerance	
					SCALE: NONE	X.	± 0.50
						X.X	± 0.30
						X.XX	± 0.10
						X°	$\pm 1°$

SHEET: 01/01

REV.: F