
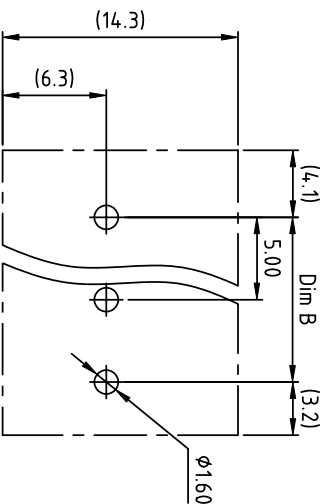
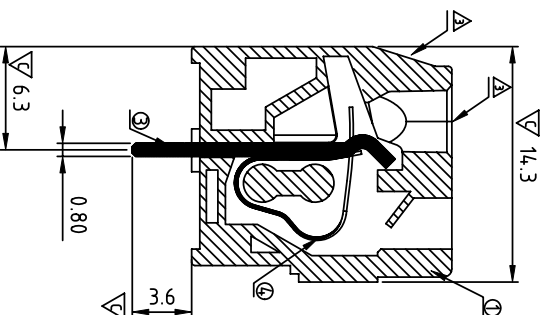
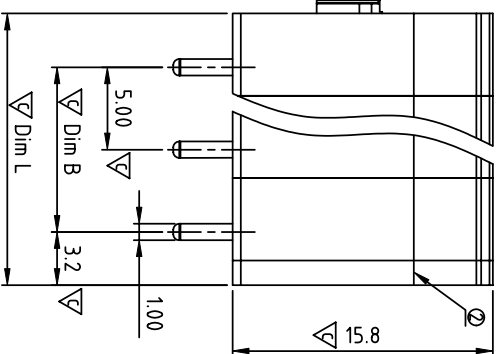


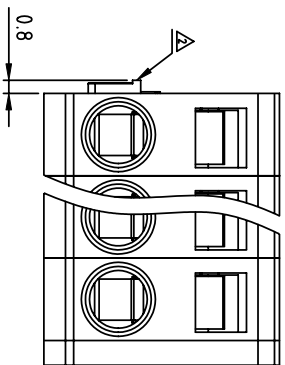

P.C.B LAYOUT
Top view

△ N = Number of poles

DimL=N×5.00±1.5
DimB=(N-1)×5.00

POLES	Dim L	Dim B
1p	±0.1	±0.15
2p-6p	±0.2	±0.15
7p-12p	±0.3	±0.25
13p-18p	±0.4	±0.35
19p-24p	±0.45	±0.4

SIGN	DATE	DESCRIPTION	APPROVER
△	1/31/07	The soldering temperature from 245° to 250°	Aaron
△	05/28/13	change the structure	Da cheng
△	05/28/13	update the drawing	Da cheng
△			
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUAL Y!!!

Material

- Item ① Insulator body: Thermoplastic (UL 94V-0)
- Item ② Insulating cover : Thermoplastic (UL 94V-0)
- Item ③ Contact pin : Brass; Tin plated
- Item ④ Wire guard: Stainless steel

Electrical:

- Voltage rating: 250V
- Current rating: 8A
- Wire range: 12-28
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 15KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus
- Critical dimension: ∇

HM XX 70 X 0 XXXX G

△ RoH's compliant
(lead<4%)
In copper Alloy

No. OF POLES

- 01: 1 POLES
- 02: 2 POLES

24: 24 POLES

△ COLOR

- 0 Black (RAL9005)
- 2 Red (RAL3007/D)
- 3 Orange(RAL2011/P)
- 4 Yellow(RAL1018/A)
- 5 Green(RAL6018/T)
- 6 Blue (RAL5015/A)
- 8 Grey(RAL7004/P)
- 9 White(RAL1102)
- C Multiple colors

0000 Standard @ Logo

000A Standard ANY Logo

Any special item by

customer request,

please contact sales

department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	HM 5.0mm Series Dip solder			
PART NO.	HMxx70x0xxxxG		DWG NO.	BHM0001
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.
	Da cheng 2013.05.28	Da cheng 2013.05.28		
				Tolerance
				X ±0.50
				X.X ±0.30
				X.XX ±0.10
				X° ±1°

SHEET: 01/01
REV.: F

1 2 3 4 5 6 7

A B C D E