


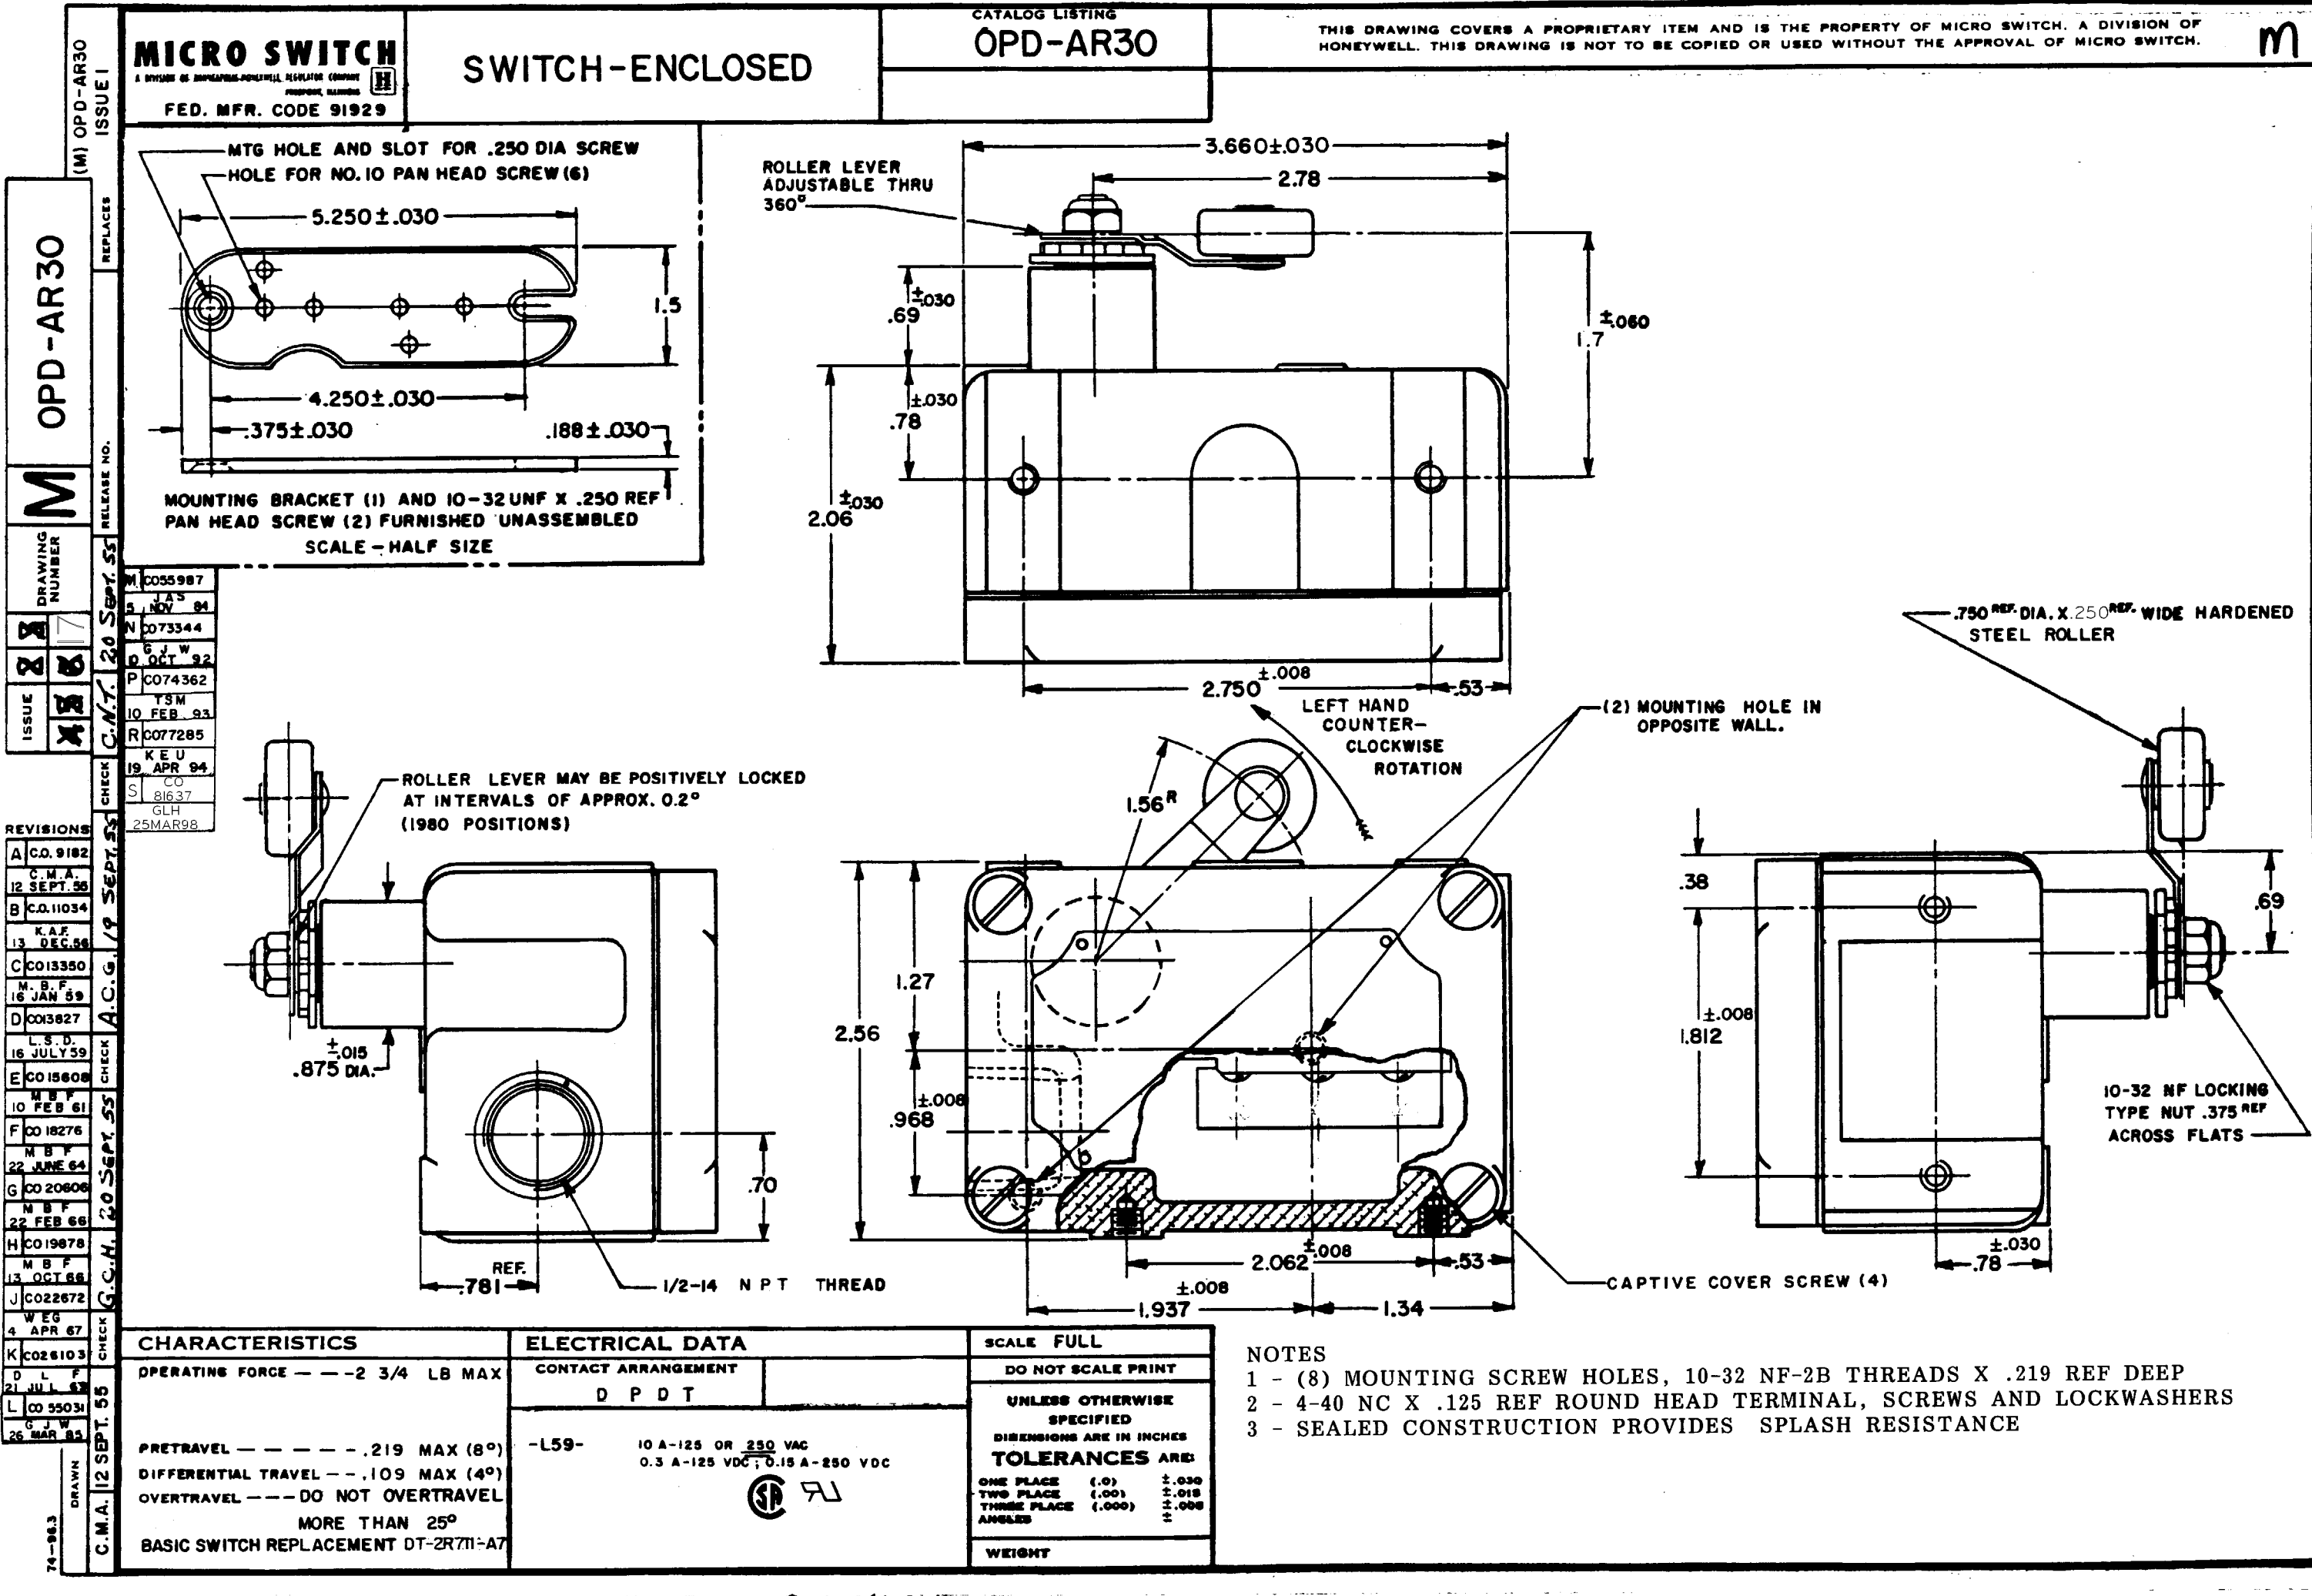

MICRO SWITCH
A DIVISION OF HONEYWELL-ROPER, INC.
FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
OPD-AR30

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

M

OPD-AR30

M

DRAWING
NUMBER

ISSUE

REVISIONS

A	C.O. 9182	C.M.A.	12 SEPT. 56
B	C.O. 11034	K.A.F.	13 DEC. 56
C	C.O. 13350	M.B.F.	16 JAN. 59
D	C.O. 13827	L.S.D.	16 JULY 59
E	C.O. 15608	M.B.F.	10 FEB. 61
F	C.O. 18276	M.B.F.	22 JUNE 64
G	C.O. 20606	M.B.F.	22 FEB. 66
H	C.O. 19878	M.B.F.	13 OCT. 68
J	C.O. 22672	W.E.G.	4 APR. 67
K	C.O. 26103	D.L.F.	21 JUL. 67
L	C.O. 55031	G.J.W.	26 MAR. 83

74-963
DRAWN

REPLACES

RELEASE NO.

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHARACTERISTICS
OPERATING FORCE — — — 2 3/4 LB MAX
PRETRAVEL — — — .219 MAX (8°)
DIFFERENTIAL TRAVEL — .109 MAX (4°)
OVERTRAVEL — — — DO NOT OVERTRAVEL
MORE THAN 25°
BASIC SWITCH REPLACEMENT DT-2R7M-A7

ELECTRICAL DATA
CONTACT ARRANGEMENT D P D T
-L59- 10 A-125 OR 250 VAC 0.3 A-125 VDC; 0.15 A-250 VDC

SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.018
THREE PLACE (.000) ±.008
ANGLES ±
WEIGHT

- NOTES
- 1 - (8) MOUNTING SCREW HOLES, 10-32 NF-2B THREADS X .219 REF DEEP
 - 2 - 4-40 NC X .125 REF ROUND HEAD TERMINAL, SCREWS AND LOCKWASHERS
 - 3 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE