


DimA=N×5.08
DimB=(N-1)×5.08
N=NUMBER OF CONTACTS


POLES	TOL
2p-6p	+0.10/-0.10
7p-12p	+0.20/-0.20
13p-18p	+0.30/-0.30
19p-24p	+0.40/-0.40

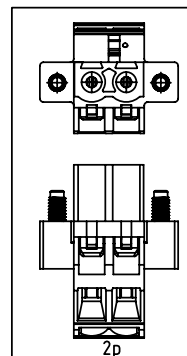


SIGN	DATE	DESCRIPTION	APPROVER
△	08/04'06	Current rating is changed from 10A to 20A	Marvin
△	08/04'06	Solid wire(AWG) standard is changed from 12-30 to 12-22	Marvin
△	08/04'06	Stranded wire(AWG) standard is changed from 12-30 to 12-22	Marvin
△	08/04'06	Torque standard is changed from 5 Lb-In to 4 Lb-In	Marvin
△	6/03'08	Operating temperature is changed	Marvin
△	6/03'08	Dimension is changed from 2.54 to 2.64	Marvin
△	2010.04.01	Add the 2p mark	Jacke

THIS IS CAD DRAWING. DO NOT REVISE MANUALLY!!!

Material

- Item ③ Clamp: Brass(CuZn) Ni plated
 - Item ④ Terminal screw: Steel Zinc plating “-” slot type
 - Item ⑤ Female contact: PhBz ,Tin plated
 - Item ⑥ Terminal (up body): Thermoplastic (UL94V-0)
 - Item ⑦ Terminal (down body): Thermoplastic (UL94V-0)
 - Item ⑧ Flange screw: Steel Zinc plating “+/-” slot type
- Electrical cULUS
- Voltage rating: 300VAC
 - △ ● Current rating: 20A
 - Wire range:
 - △ ● Solid wire(AWG): 12-22
 - △ ● Stranded wire(AWG): 12-22
 - △ ● Torque: 4 Lb-In
 - Screw: M3
 - Wire strip length: 7-8mm
 - Withstanding Voltage: 1.6KV
 - △ ● Operating temperature: -40°C to +115°C
 - Safety Approval:  cULUS


EM xx 51 x 2 xxxx G

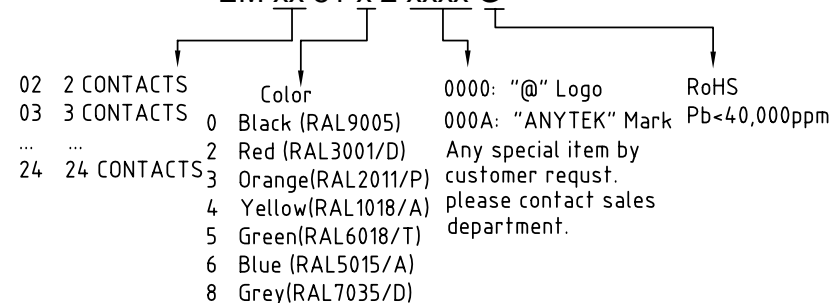

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		EM-5.08 Series with flange					
PART NO.		EMxx51x2xxxxG		DWG NO.		8EM0002	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Jacke 2010.04.01	Jacke 2010.04.01		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
				SHEET: 01/01	REV: E		X.XX ±0.10
							X° ±1°