
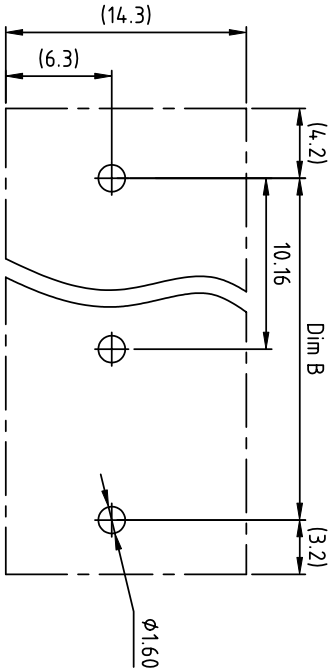
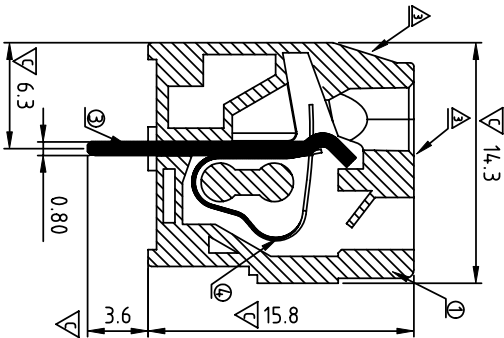
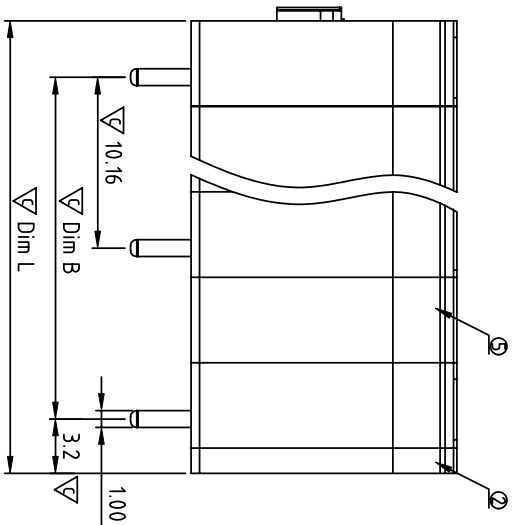


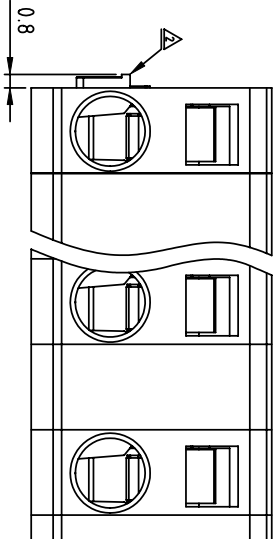

P.C.B LAYOUT
Top view

N=NUMBER OF POLES

Dim L	(N-1)×10.16+6.58
Dim B	(N-1)×10.16

POLES	Dim L	Dim B
1p	±0.15	±0.15
2p-4p	±0.2	±0.15
5p-7p	±0.3	±0.25
8p-10p	±0.4	±0.35
11p-12p	±0.45	±0.4

SIGN	DATE	DESCRIPTION	APPROVER
Δ	1/31/07	The soldering temperature from 245° to 250°	Aaron
Δ	05/28'13	change the structure	Da cheng
Δ	05/28'13	update the drawing	Da cheng
Δ			
Δ			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item ① Insulator body: Thermoplastic (UL94V-0)
- Item ② Insulating cover : Thermoplastic (UL94V-0)
- Item ③ Contact pin : Brass.Tin plated
- Item ④ Wire guard: Stainless steel
- Item ⑤ Pad board: Thermoplastic (UL94V-0)

Electrical:

- Voltage rating: 250V
- Current rating: 8A
- Wire range:
- Solid wire(AWG): 12-28
- Stranded wire(AWG): 12-28
- Wire strip length: 8-9mm
- Withstanding Voltage: 15KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:
- Critical dimension:

HM xx 60 x 0 xxxx G

No. OF POLES
01: 1 POLES
02: 2 POLES
12: 12 POLES

RoHS compliant (lead<4%)
In copper Alloy

0000 Standard @ Logo
000A Standard ANY Logo
Any special item by customer request,
please contact sales department.

- 0 COLOR
0 Black (RAL9005)
2 Red (RAL3007/D)
3 Orange(RAL2011/P)
4 Yellow(RAL1018/A)
5 Green(RAL6018/T)
6 Blue (RAL5015/A)
8 Grey(RAL7004/P)
9 White(RAL1102)
C Multiple colors

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE				DWG NO.			
HM10.16mm Series Dip solder				8HM0105			
PART NO.	HMxx60x0xxxxG			CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN	UNIT: mm	Tolerance		
	Da cheng	2013.05.28	Da cheng	2013.05.28	SCALE: NONE	X.XX ±0.30	
						X.XX ±0.10	
						X° ±1°	