

MICRO SWITCH

FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

ACTUATOR-SWITCH

CATALOG LISTING

JS-150

JS-150

M

DRAWING
NUMBER

ISSUE

8/4

REPLACES

RELEASE NO. PR-2722

CHECK

REVISIONS

A MADE

ETS

R E R

15 MAY 70

B PR-2722

R E R

19 JUN 72

C C079303

DLT

7 MAR 95

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK




CHECK

CHECK

2-56 UNC CORROSION RESISTANT STEEL
HEX NUT (2) $\triangle 1$

CORROSION RESISTANT STEEL
LOCKWASHER (2) $\triangle 1$

2-56 UNC X .500 REF CORROSION RESISTANT
STEEL ROUND HEAD MACHINE SCREW (2) $\triangle 1$

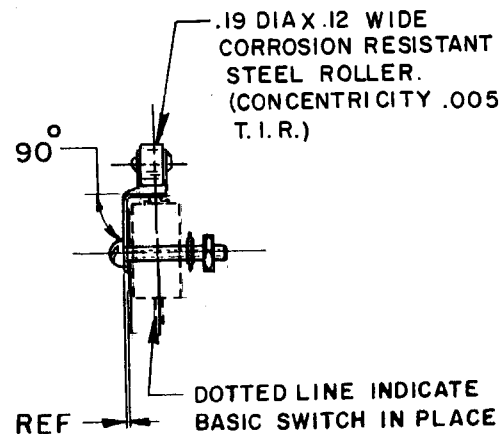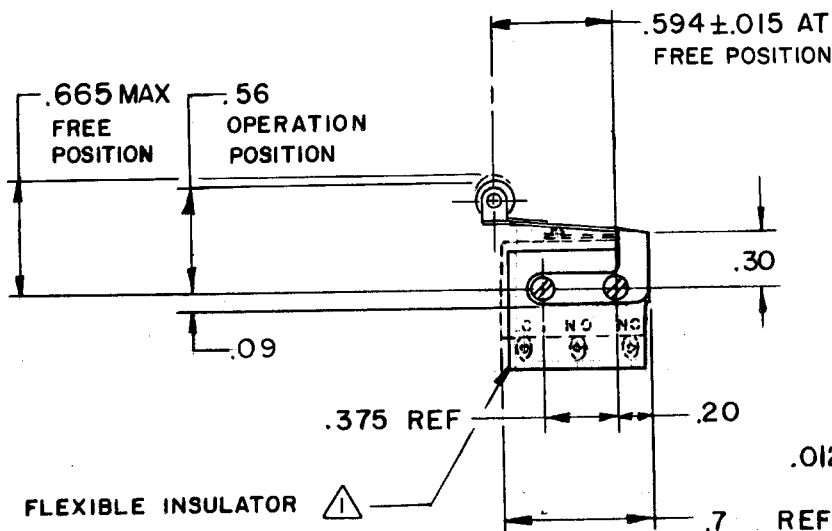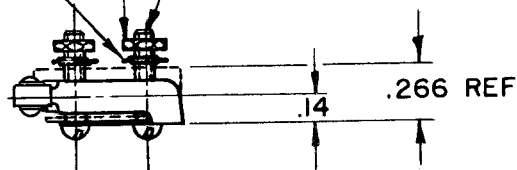

NOTE -



$\triangle 1$ - FURNISHED UNASSEMBLED
 $\triangle 2$ CHARACTERISTICS WITH IHM19 (MS27216-1)
BASIC SWITCH INSTALLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — — 14 OZ MAX
RELEASE FORCE — — — 2 OZ MIN
PRETRAVEL — — — .078 MAX
DIFFERENTIAL TRAVEL — — .020 MAX
OVERTRAVEL — — — .014 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$
TWO PLACE (.00) $\pm .015$
THREE PLACE (.000) $\pm .005$
ANGLES $\pm 2^\circ$

WEIGHT

FO-50378-1A

DRAWN

D L F

19 AUG 69

CHECK

LSD

21 AUG 68

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK

CHECK