

1

2



3

TABLE 1

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	MATERIAL	COLOR	QTY.
△7283-7020-10 ETC.	① SEE TABLE 2	PBT	SEE TABLE 2	1
	② 7157-4103	PBT	NATURAL	1
	③ 7137-2211-80	△SILICONE RUBBER	RED IRON	1

TABLE 2

SUB ASSEMBLY PART NO. AND CH. CODE	PART NO. AND CH. CODE	COLOR
△7283-7020	7183-7020	NATURAL
△7283-7020-10	7183-7020-10	DARK GRAY
△7283-7020-30	7183-7020-30	BLACK
△7283-7020-40	7183-7020-40	LIGHT GRAY
△7283-7020-50	7183-7020-50	ORANGE
△7283-7020-60	7183-7020-60	GREEN
△7283-7020-80	7183-7020-80	BROWN
△7283-7020-90	7183-7020-90	BLUE

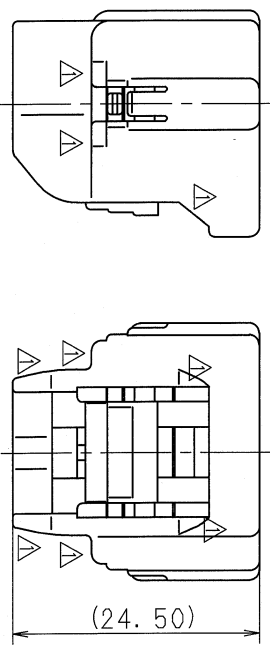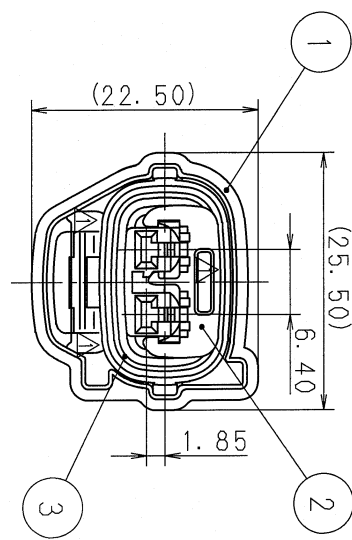

- 注記
- 1) 適用端子品番 : 7116-4025 ETC.
 - 2) 嵌合相手品番 : 7282-7020-10 ETC.
 - 3) 適用工口絶品番 : 7158-3006-90 ETC.

NOTES

- 1) APPLICABLE TERMINAL NO. : 7116-4025 ETC.
- 2) MATING PART NO. : 7282-7020-10 ETC.
- 3) APPLICABLE RUBBER STOPPER NO. : 7158-3006-90 ETC.

△ 02.09.03	CHANGED NOTE & PART NAME	C02-Y002	J.S	CUSTOMER		MATL.	SEE TABLE 1	TREAT. & FIN.	ISSUE MARK
△ 96.10.01	ADDED PART NO.	C96-M766	M.T	CUSTOMER PART NO.					
△ 89.08.19	CHANGED FORM & RENEW	C89-L863	M.T			NAME	△2.3II (090II) 2P SEALED CONNECTOR		
△ 89.02.22	NEW	C89-L377	T.M	OFFICE		HOUSING FEMALE SUB ASSEMBLY			
LET DATE	REVISION RECORD	NO.	CHKD	VENDOR					
GENERAL TOLERANCE									
A	10MAX	50MAX	100MAX	250MAX	500V	ANGLE	ECCENT		
B	±0.15	±0.2	±0.3	±0.5	±0.75	±30'	0.1		
C	±0.2	±0.3	±0.55	±0.95	±1.4	±30'	0.1		
△	±0.3	±0.5	±0.8	±1.4	±2	±30'	0.15		
SPECIFIED									
MASS									
9									
02.09.04									
88.07.27 02.09.03									
YAZAKI CORPORATION									

1

2

3