
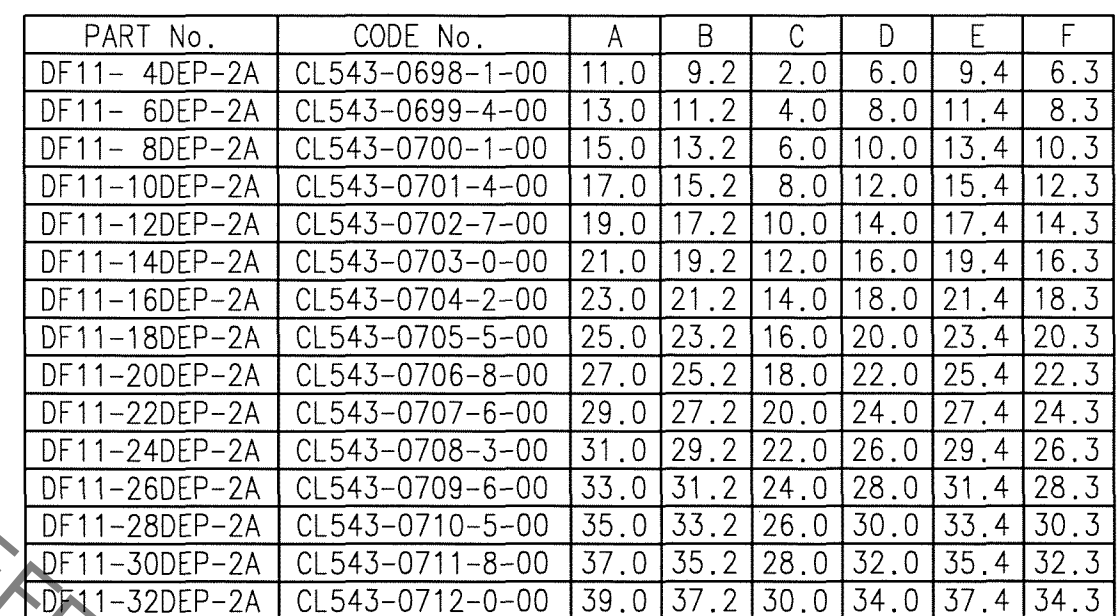
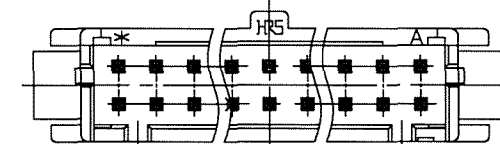




MATED(2:1)

NOTES: 1) IN COMBINATION WITH DF11-*DS-2C, IT IS 16.9 mm.
: 2 THE THICKNESS OF A CONFORMITY PANEL IS 1 mm TO 1.6 mm.
(SHAKINESS OF SOME ARISES EXCEPT 1.2 mm OR 1.6 mm.)
: 3) TERMINAL NO.1 TO THE SOCKET WHICH MATED IS EXPRESSED.
KEEP IN MIND THAT THE CIRCUIT AT THE TIME OF CARRYING OUT SOCKET MATED BECOMES
BOTH SIDES WITH TERMINAL NO.1 OF A SOCKET 1,
AND CONNECTION OF A SOCKET 2 OF TERMINAL NO.2.
: 4 THE POSITION OF HRS MARK AND CAV. MARK ALSO HAS THE CASE OF THE FOLLOWING FIGURE.



				2		BRASS		SURFACE: TIN PLATED 1μm min UNDER PLATING: NICKEL PLATED 0.5μm min							
1		POLYAMIDE		UL94V-0, BLACK											
NO.		MATERIAL		FINISH, REMARKS		NO.		MATERIAL		FINISH, REMARKS					
CODE NO. (OLD)				DRAWN		DESIGNED		CHECKED		APPROVED		RELEASED			
				A. Miura '06.10.03		N. Hirose '06.10.03		H. Umehara '06.10.03		T. Ima '06.10.03					
		DRAWING NO.				PART NO.									
SCALE		EDC3-313906-00				DF11-*DEP-2A									
5 : 1															
UNITS		 HIROSE ELECTRIC CO., LTD				CODE NO.						CL543-		1/1	
		mm													

TO

F