



REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	13FEB2023	V.T	Z.Z
	A1	ECN-23-228384	20AUG2023	F.Z	Z.Z
	A2	ECN-24-267861	24MAY2024	F.Z	Z.Z




2446122-1




1-2446122-1

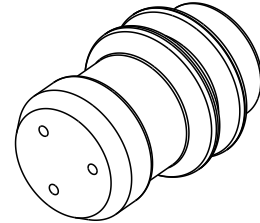2446122-2
(BLIND PLUG)

SCALE 5:1

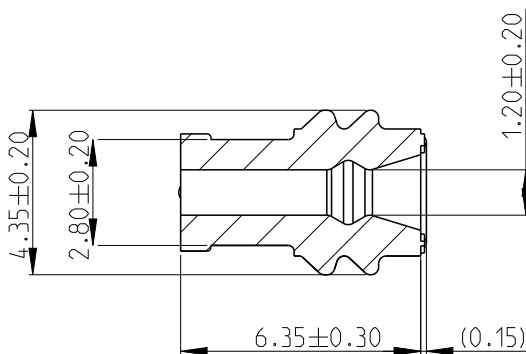

2446122-1

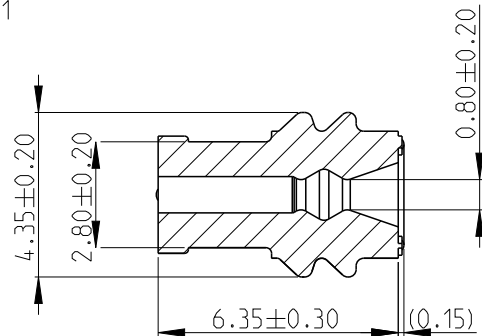

1-2446122-1

NOTES:

1. MATERIAL: SILICONE
COLOR: SEE TABLE

2. INSULATION CRIMP MEASUREMENTS ARE DEPENDENT ON WIRE INSULATION TYPE AND OUTSIDE DIAMETER.
INSULATION CRIMP MUST BE SUFFICIENT TO KEEP SEAL FROM SLIDING OUT OF CRIMP WHEN INSERTING INTO CONNECTOR CAVITY BUT NOT TEAR THE SEAL.

2446122-2	A	GREY	N/A	0.075	BLIND PLUG
2446122-1	A	BLACK	1.4-2.4	0.053	
1-2446122-1	A	GREEN	1.1-1.4	0.06	
TE PN	REV	COLOR RAL	DIA OF INSULATION(mm)	WEIGHT[g]	REMARK


A2

DIMENSIONS:

mm

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

DWN
V.TANG

13FEB2023

CHK
C.WAN

13FEB2023

APVD
Z.ZHOU

13FEB2023

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

MATERIAL

-

FINISH

-



TE Connectivity

NAME SINGLE WIRE SEAL AND PLUG
FOR CAVITY DIA. 3.95

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A 4

00779

C-2446122

-

CUSTOMER DRAWING

SCALE

8:1

SHEET

1

OF 1

REV

A3