

300mA Low Dropout Voltage Linear Regulator

General Description

The DS8571 series are a group of low-dropout (LDO) voltage regulators offering the benefits of wide input voltage range from 2.3V to 6V, low dropout voltage, low power consumption, and miniaturized packaging.

With fast instantaneous response, it is suitable for product applications that require fast loading speed in an instant. There is an option of shutdown mode by selecting the parts with the EN pin and pulling it low. The shutdown current in this mode goes down to only 100nA (typical).

The DS8571 series of linear regulators are stable with the ceramic output capacitor over its wide input range from 2.3V to 6V and the entire range of output load current (0mA to 300mA).

Features


- Fast Transient Response
- $\pm 2\%$ Output Accuracy
- 300mA Output Current
- 100nA Disable Current (by option)
- Wide Operating Input Voltage Range: 2.3V to 6V
- Dropout Voltage: 0.06V at 100mA / V_{OUT} 3.3V
- Support Fixed Output Voltage 0.5V, 0.8V, 1.2V, 1.5V, 1.8V, 2.5V, 2.8V, 3.0V, 3.3V
- Stable with Ceramic or Tantalum Capacitor
- Current Limit Protection
- Over-Temperature Protection
- SSOT-23 , SOT-23-3 , SOT-23-5 , SC-70-5 , DFN1x1-4L and DFN2x2-6L Packages Available

Applications


- Portable, Battery Powered Equipment
- Low Power Microcontrollers
- Laptop, Palmtops and PDAs
- Wireless Communication Equipment
- Audio/Video Equipment
- Car Navigation Systems

Pin Configurations


SSOT-23&SOT-23-3




SOT-23-5




SOT-23-5




SC-70-5



DFN1x1-4L



DFN2x2-6L



Ordering Information

DS8571-AABB

Designator	Description	Symbol	Description
AA	Output Voltage	05	$V_{OUT} = 0.5V$
		..	..
		08	$V_{OUT} = 0.8V$
		..	..
		33	$V_{OUT} = 3.3V$
		105	$V_{OUT} = 1.05V$
		135	$V_{OUT} = 1.35V$
		285	$V_{OUT} = 2.85V$
BB	Package type	SS3	SSOT-23
		S3	SOT-23-3
		S5	SOT-23-5
		C5	SC-70-5
		D4	DFN1x1-4L
		D6	DFN2x2-6L

DS8571N-AABB (For SOT-23-5 with SNS pin)

Designator	Description	Symbol	Description
AA	Output Voltage	08	$V_{OUT} = 0.8V$
BB	Package type	S5	SOT-23-5

Notes : $V_{OUT} = (R1 + R2) / R2 \times 0.8V$, And $R2 < 16K\Omega$.

Description of Functional Pins

DS8571

Pin No				Pin Name	Pin Function
SSOT-23 SOT-23-3	SOT-23-5 SC-70-5	DFN1x1	DFN2x2		
1	2	2	3	GND	Ground
2	5	1	1	VOUT	Output of the Regulator
3	1	4	6	VIN	Input of Supply Voltage.
	3	3	4	EN	Enable Control Input.
	4		2,5	NC	No internal connection
		Exposed Pad	Exposed Pad	SGND	Substrate of Chip. Leave floating or tie to GND.

DS8571N (For SOT-23-5 with **SNS** pin)

Pin No	Pin Name	Pin Function
SOT-23-5		
1	VIN	Input of Supply Voltage.
2	GND	Ground
3	EN	Enable Control Input.
4	SNS	Sense of Output Voltage.
5	VOUT	Output of the Regulator

Typical Application Circuit

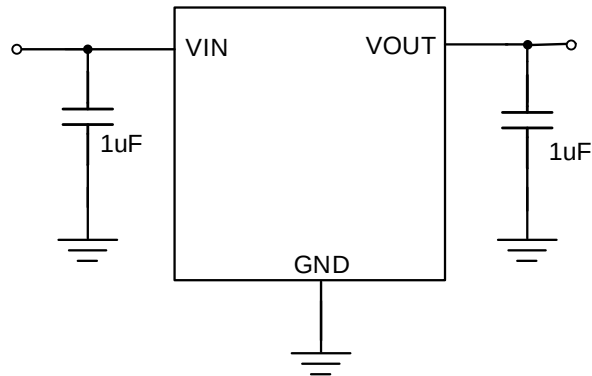


Figure 1: Application circuit of Fixed V_{OUT} LDO

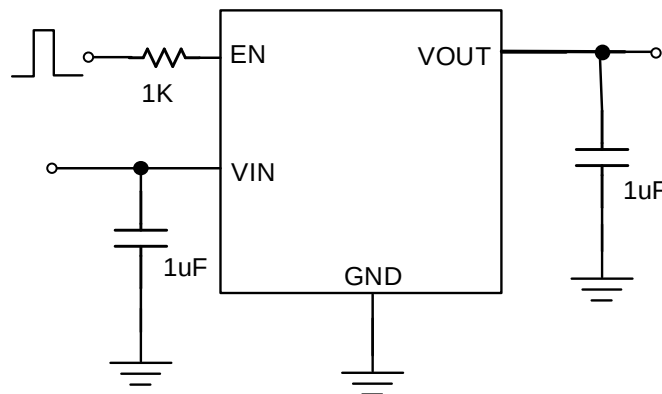


Figure 2: Application circuit of Fixed V_{OUT} LDO with enable function

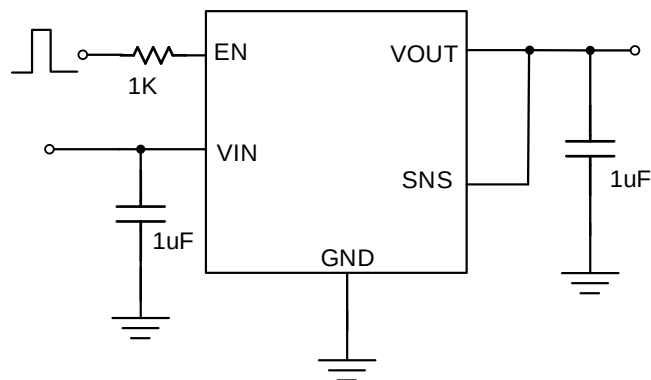


Figure 3: Application circuit of Fixed V_{OUT} LDO with enable and **sense** functions


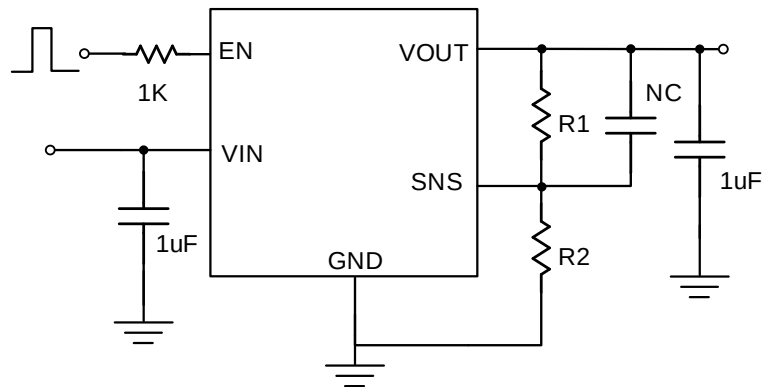


Figure 4: Application circuit of Adjustable V_{OUT} LDO with enable and **sense** functions

Function Block Diagram

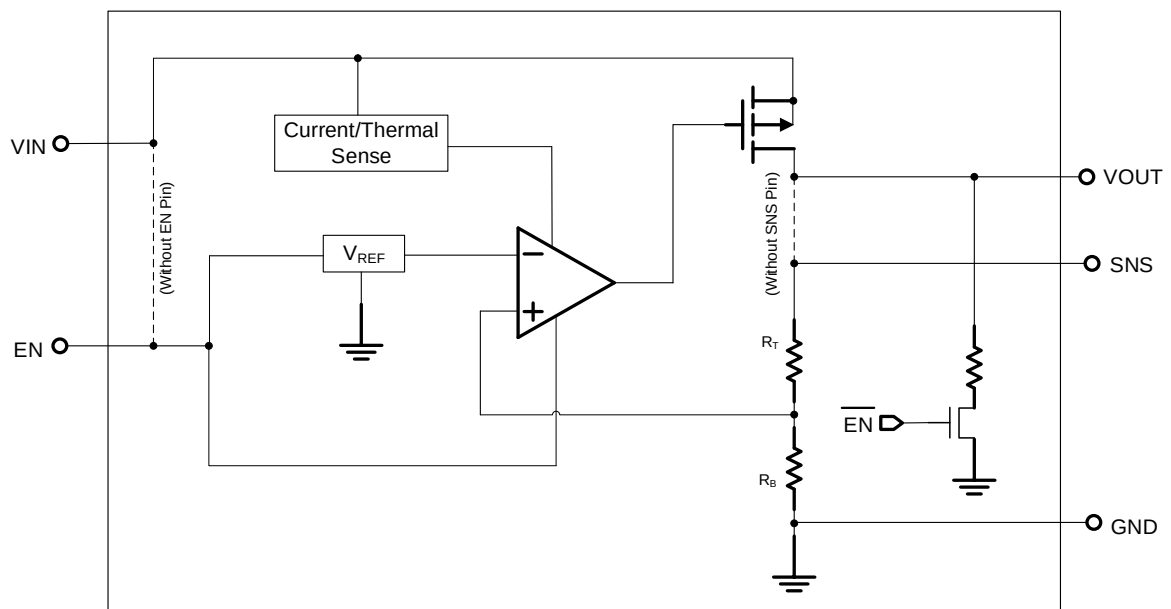

Absolute Maximum Ratings (Note 1)

VIN to GND	-0.3V to 7V
VOUT, EN to GND	-0.3V to 6V
VOUT to VIN	-6V to 0.3V
Package Thermal Resistance (Note 2)	
SSOT-23, θ_{JA}	250 °C /W
SOT-23-5, SOT-23-3, θ_{JA}	220 °C /W
SC-70-5, θ_{JA}	300 °C /W
DFN1x1-4L, θ_{JA}	195 °C /W
DFN2x2-6L, θ_{JA}	95 °C /W
Lead Temperature (Soldering, 10 sec.)	260 °C
Junction Temperature	150 °C
Storage Temperature Range	-60 °C to 150 °C
ESD Susceptibility	
HBM	2KV
MM	200V
CDM	2KV

Recommended Operating Conditions

Input Voltage VIN	2.3V to 6V
Junction Temperature Range	-40 °C to 125 °C
Ambient Temperature Range	-40 °C to 85 °C

Electrical Characteristics

($V_{IN} = 5V$, $V_{EN} = 5V$ $T_A = 25^\circ C$ unless otherwise specified)







Parameter	Symbol	Test Conditions		Min	Typ	Max	Unit
Supply Voltage	V _{IN}			2.3	--	6.0	V
DC Output Voltage Accuracy		I _{LOAD} =0.1mA		-2		2	%
SNS Input Current	I _{SNS}	SNS = V _{OUT}			0.3		μA
Dropout Voltage (I _{LOAD} =100mA) (Note 3)	V _{DROP_3V}	V _{OUT} ≥ 3V			0.06		V
	V _{DROP_2.5V}	V _{OUT} = 2.5V			0.08		
	V _{DROP_1.8V}	V _{OUT} = 1.8V			0.09		
	V _{DROP_1.5V}	V _{OUT} = 1.5V			0.12		
	V _{DROP_1.2V}	V _{OUT} = 1.2V			0.15		
	V _{DROP_0.8V}	V _{OUT} = 0.8V			0.18		
	V _{DROP_0.5V}	V _{OUT} = 0.5V			0.23		
Ground Current	I _Q	I _{LOAD} = 0mA			30		μA
Shutdown Ground Current	I _{SD}	V _{EN} = 0V, V _{OUT} = 0V			0.1	0.5	μA
Enable Threshold Voltage	V _{IH}	EN Rising		1.0			V
	V _{IL}	EN Falling				0.4	
EN Input Current	I _{EN}	V _{EN} = 5V			10	100	nA
Line Regulation	Δ _{LINE}	I _{LOAD} =30mA, 2.5V ≤ V _{IN} ≤ 5.5V or (V _{OUT} + 0.2V) ≤ V _{IN} ≤ 5.5V			0.3		%
Load Line	Δ _{LOAD}	1mA ≤ I _{LOAD} ≤ 300mA			20		mV
Output Current Limit	I _{LIM}	V _{OUT} = 0V		301	550		mA
Power Supply Rejection Ratio (I _{LOAD} =5mA)	PSRR	V _{OUT} =0.8V, V _{IN} = 5V	f = 100Hz	--	55	--	dB
			f = 1kHz	--	60	--	
Output Voltage Noise (BW = 10Hz to 100kHz, C _{OUT} =1μF,)		V _{IN} = 3.5V I _{LOAD} =0.1A	V _{OUT} =0.8V	--	120	--	μV _{RMS}
			V _{OUT} =2.8V	--	180	--	
Thermal Shutdown Temperature	T _{SD}	I _{LOAD} =10mA		--	160	--	°C
Thermal Shutdown Hysteresis	ΔT _{SD}			--	20	--	°C
Discharge Resistance	R _{DC}	EN = 0V , V _{OUT} = 0.1V		--	30	--	Ω

Note 1. Stresses beyond those listed “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.


Note 2. θ_{JA} is measured at $T_A = 25^{\circ}\text{C}$ on a DSTECH EVB board.

Note 3. $V_{\text{DROP}} = V_{\text{IN}} - V_{\text{OUT}}$ when the V_{OUT} is 98% of its target value.


Typical Characteristics

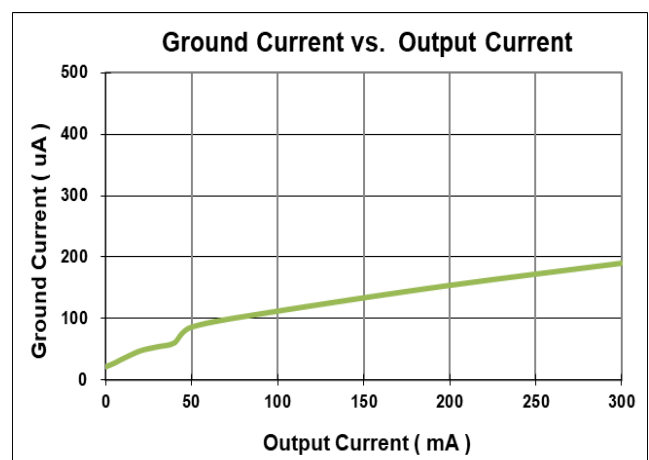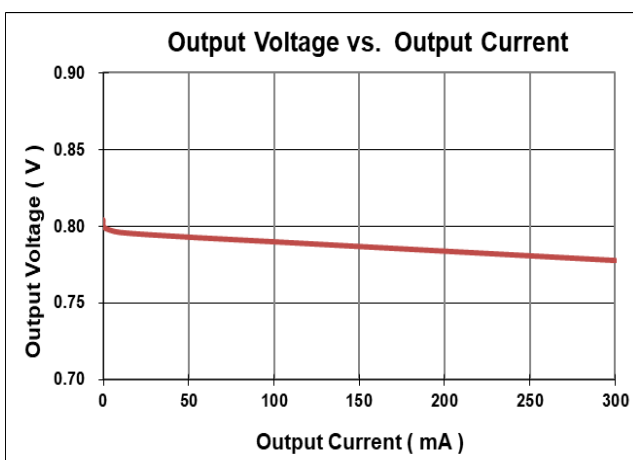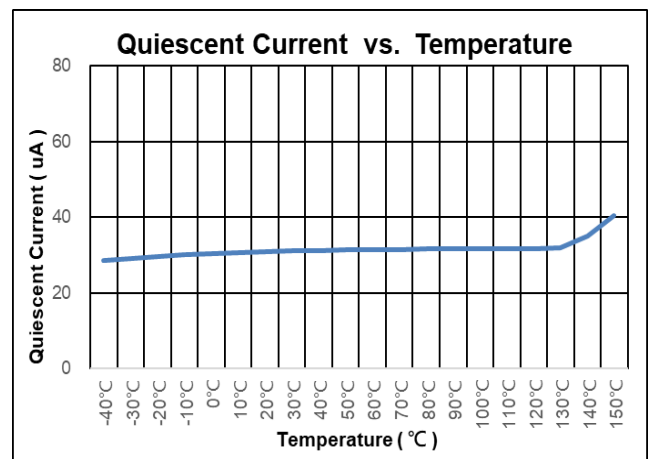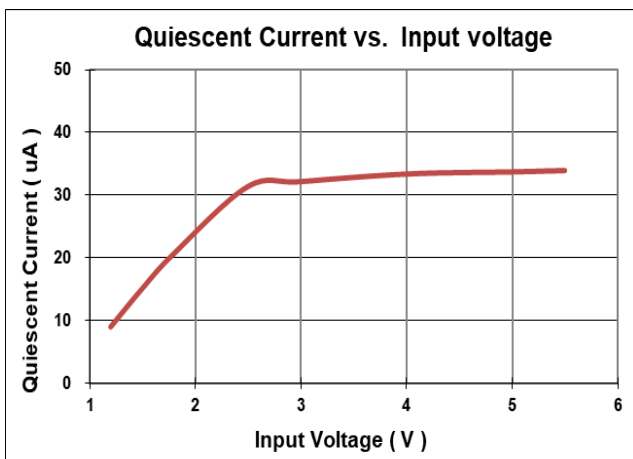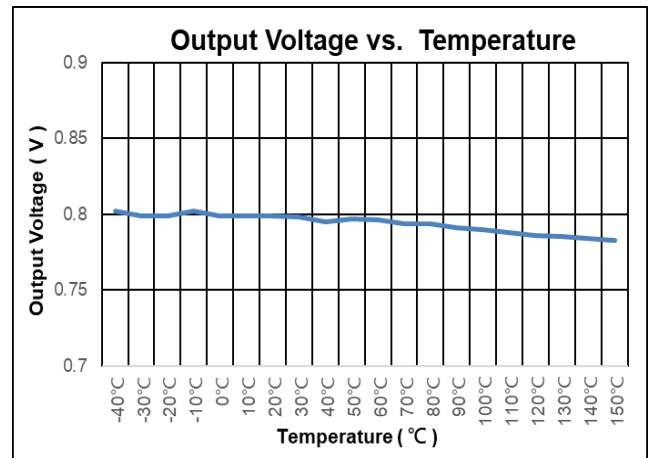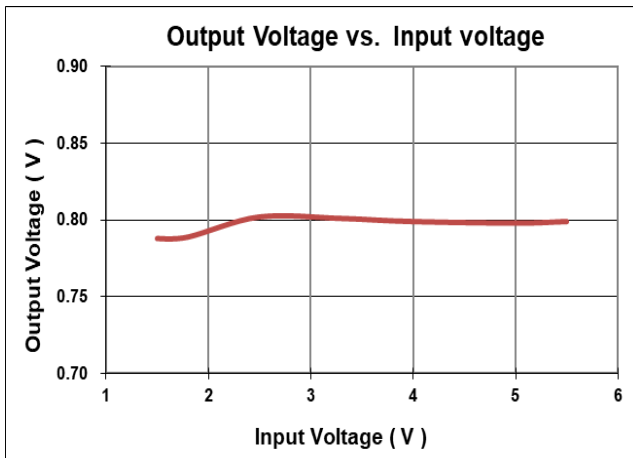


Load Transient Response

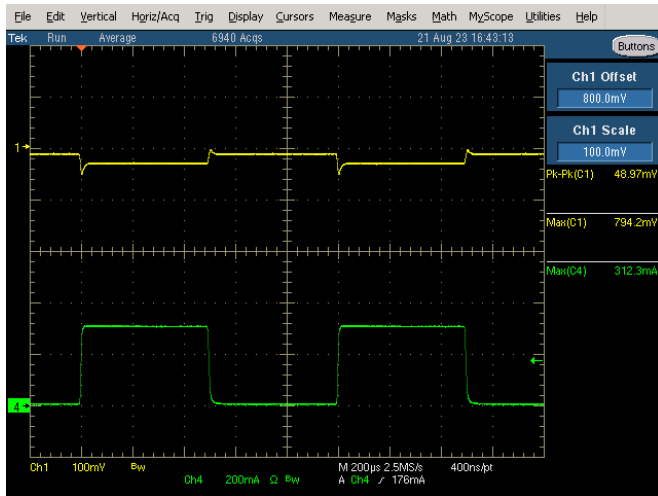

Current Limit

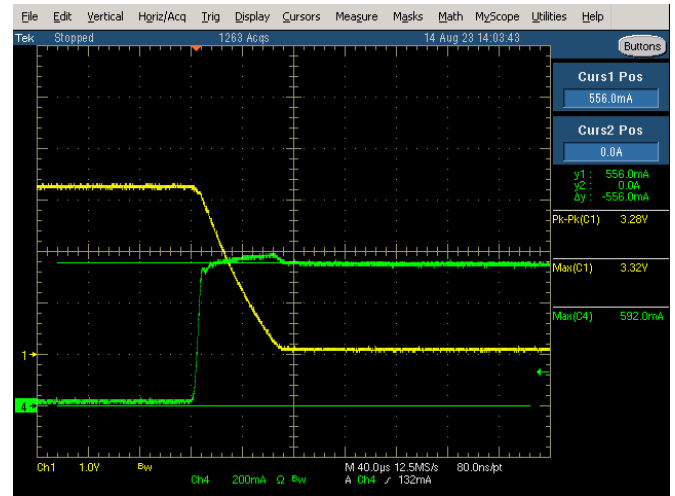

PSRR vs. Frequency

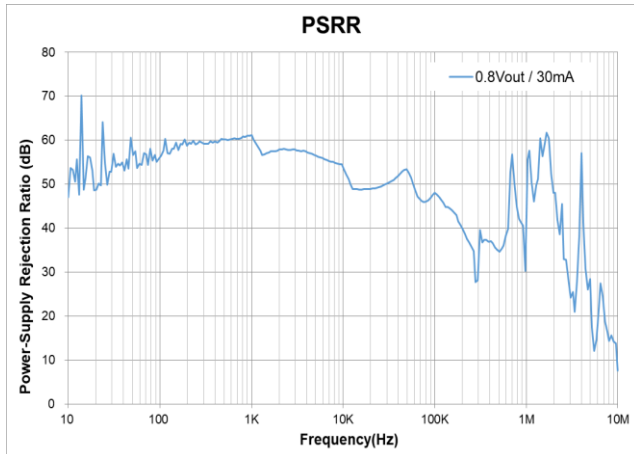

Application Guideline

Input and Output Capacitor Requirements

The external input and output capacitors of DS8571 series must be properly selected for stability and performance. Use a 1μF or larger input capacitor and place it close to the IC's V_{IN} and GND pins. Any output capacitor meeting the minimum 1mΩ ESR (Equivalent Series Resistance) and effective capacitance between 1μF and 22μF requirement may be used. Place the output capacitor close to the IC's V_{OUT} and GND pins. Increasing capacitance and decreasing ESR can improve the circuit's PSRR and line transient response.

Current Limit

The DS8571 series contain the current limiter of output power transistor, which monitors and controls the transistor, limiting the output current to 550mA (typical). The output can be shorted to ground indefinitely without damaging the part.

Dropout Voltage

The DS8571 series use a PMOS pass transistor to achieve low dropout. When (V_{IN} – V_{OUT}) is less than the dropout voltage (V_{DROP}), the PMOS pass device is in the linear region of operation and the input-to-output resistance is the R_{DS(ON)} of the PMOS pass element. V_{DROP} scales approximately with the output current because the PMOS device behaves as a resistor in dropout condition.

As any linear regulator, PSRR and transient response are degraded as (V_{IN} – V_{OUT}) approaches dropout condition.

Adjustable Output Voltage Application

The DS8571N by SNS pin also can work as an adjustable output voltage LDO. Figure 1 gives the connections for the adjustable output voltage application. The resistor divider from V_{OUT} to SNS sets the output voltage when in regulation.

The voltage on the SNS pin sets the output voltage and is determined by the values of R1 and R2. To keep a good temperature coefficient of output voltage, the values of R1 and R2 should be selected carefully to ignore the temperature effect of input current at the SNS pin. A current greater than 50μA in the resistor divider is recommended to meet the above requirement. The adjustable output voltage can be calculated using the formula given in equation 1:

$$V_{OUT} = \frac{R1+R2}{R2} \times V_{SNS} \quad (1)$$

where V_{SNS} is determined by the output voltage selections in the ordering information of DS8571N-08.

The minimum recommended 50μA in the resistor divider makes the application no longer a 30μA low quiescent LDO.

OTP (Over Temperature Protection)

The over temperature protection function of DS8571 series will turn off the P-MOSFET when the junction temperature exceeds 160°C (typ.). Once the junction temperature cools down by approximately 20°C, the regulator will automatically resume operation.

Thermal Application

For continuous operation, do not exceed the absolute maximum junction temperature. The maximum power dissipation depends on the thermal resistance of the IC package, PCB layout, rate of surrounding airflow, and difference between junction and ambient temperature. The maximum power dissipation can be calculated as below:

$T_A = 25^{\circ}\text{C}$, DS-Tech PCB,

The max PD (Max) = ($125^{\circ}\text{C} - 25^{\circ}\text{C}$) / (250°C/W) = 0.4W for SSOT-23 packages.

The max PD (Max) = ($125^{\circ}\text{C} - 25^{\circ}\text{C}$) / (220°C/W) = 0.45W for SOT-23-3 / SOT-23-5 packages.

The max PD (Max) = ($125^{\circ}\text{C} - 25^{\circ}\text{C}$) / (300°C/W) = 0.33W for SC-70-5 packages.

The max PD (Max) = ($125^{\circ}\text{C} - 25^{\circ}\text{C}$) / (195°C/W) = 0.51W for DFN1x1-4L package.

The max PD (Max) = ($125^{\circ}\text{C} - 25^{\circ}\text{C}$) / (95°C/W) = 1.05W for DFN2x2-6L package.

Power dissipation (PD) is equal to the product of the output current and the voltage drop across the output pass element, as shown in the equation below:


$$\text{PD} = (\text{VIN} - \text{VOUT}) \times \text{IOUT}$$

Layout Consideration

By placing input and output capacitors on the same side of the PCB as the LDO, and placing them as close as is practical to the package can achieve the best performance. The ground connections for input and output capacitors must be back to the DS8571 ground pin using as wide and as short of a copper trace as is practical.


Connections using long trace lengths, narrow trace widths, and/or connections through via must be avoided. These add parasitic inductances and resistance that results in worse performance especially during transient conditions.

Package Information:

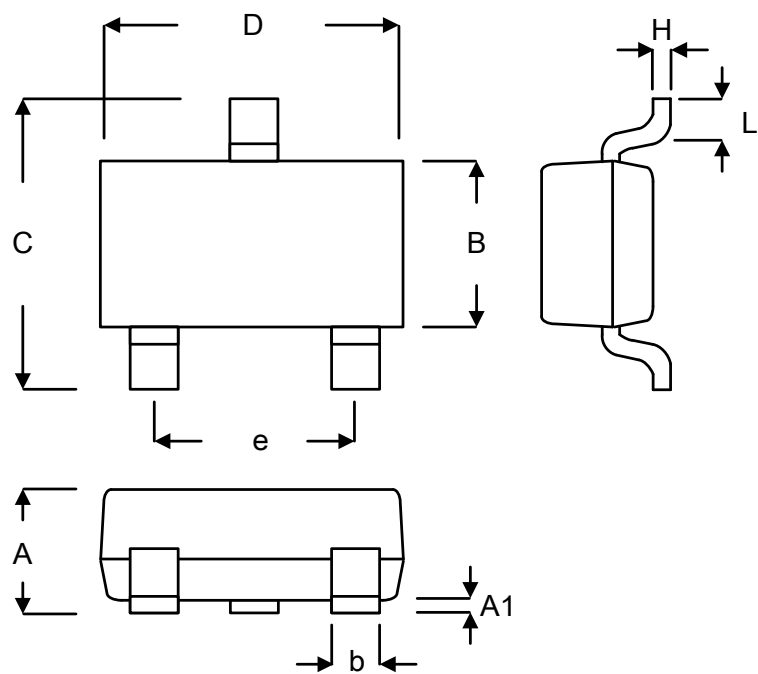


Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
B	1.200	1.400	0.047	0.055
b	0.300	0.500	0.012	0.020
C	2.250	2.550	0.089	0.100
D	2.800	3.000	0.110	0.118
e	1.900		0.075	
H	0.080	0.150	0.003	0.006
L	0.300	0.500	0.012	0.020

SSOT-23

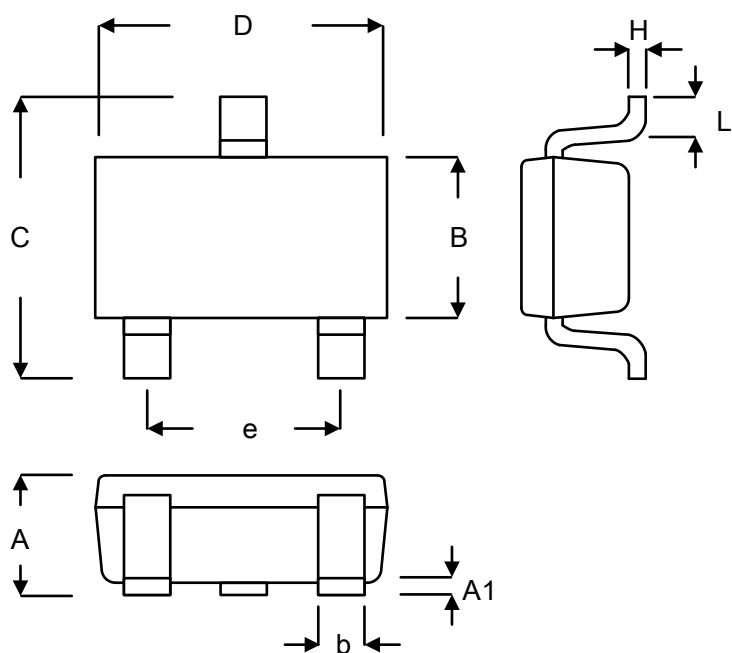


Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.889	1.295	0.035	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.250	0.560	0.010	0.022
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	1.803	2.007	0.071	0.079
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024

SOT-23-3L

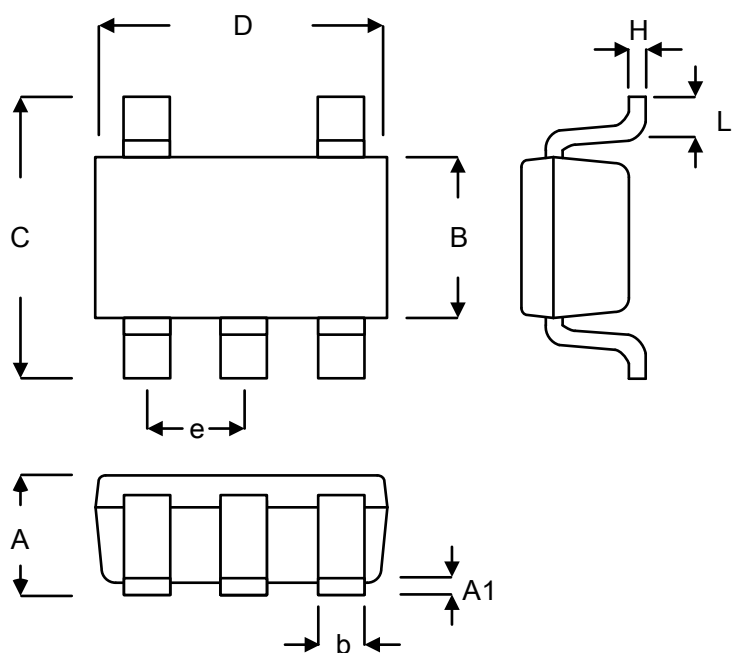





Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.889	1.295	0.035	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.250	0.560	0.010	0.022
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	0.838	1.041	0.033	0.041
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024

SOT-23-5L

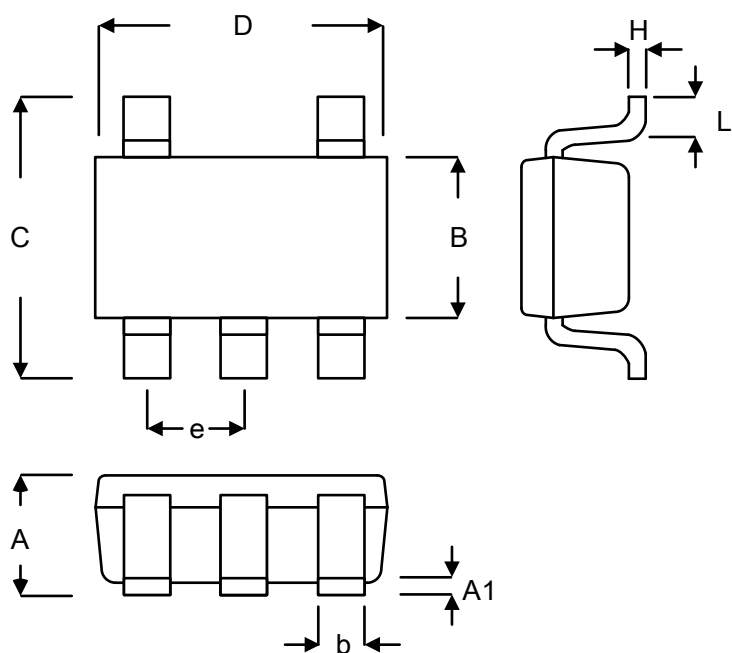

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.800	1.100	0.031	0.044
A1	0.000	0.100	0.000	0.004
B	1.150	1.350	0.045	0.054
b	0.150	0.400	0.006	0.016
C	1.800	2.450	0.071	0.096
D	1.800	2.250	0.071	0.089
e	0.650		0.026	
H	0.080	0.260	0.003	0.010
L	0.210	0.460	0.008	0.018

SC-70-5L




DETAILA

PIN #1 ID and Tie Bar Mark Options

Note : The configuration of the Pin #1 identifier is optional, but must be located within the zone indicated.

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.300	0.400	0.012	0.016
A1	0.000	0.050	0.000	0.002
A3	0.117	0.162	0.005	0.006
b	0.175	0.280	0.007	0.011
D	0.900	1.100	0.035	0.043
D2	0.430	0.550	0.017	0.022
E	0.900	1.100	0.035	0.043
E2	0.430	0.550	0.017	0.022
e	0.650		0.026	
L	0.200	0.300	0.008	0.012
H	0.039		0.002	
H1	0.064		0.003	

DFN1x1-4L

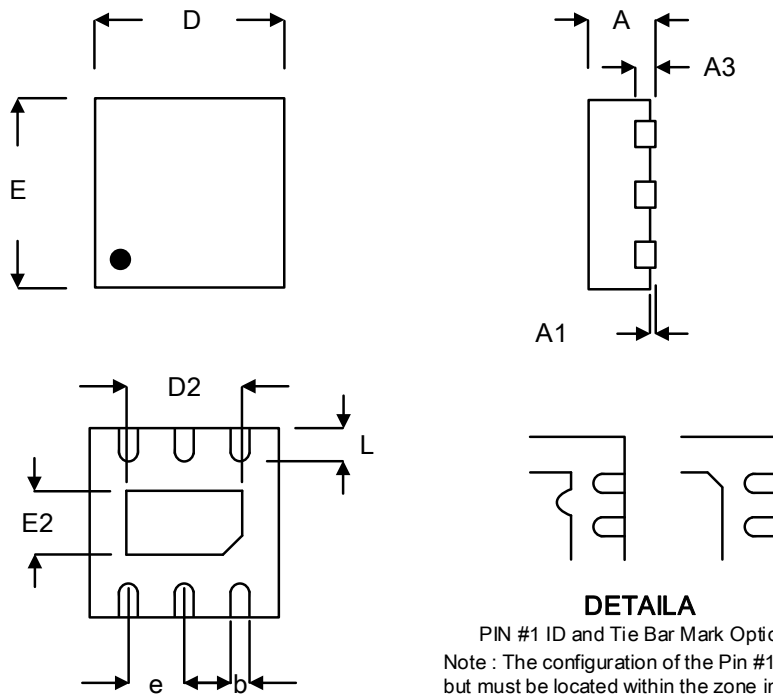

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.175	0.250	0.007	0.010
b	0.200	0.350	0.008	0.014
D	1.950	2.050	0.077	0.081
D2	1.000	1.450	0.039	0.057
E	1.950	2.050	0.077	0.081
E2	0.500	0.850	0.020	0.033
e	0.650		0.026	
L	0.300	0.400	0.012	0.016

DFN2x2-6L