

Feares

- Low operating voltage: 5V
- Ultra low capacitance: 0.3pF typical (I/O to I/O)
- Ultra low leakage: nA level
- Low clamping voltage
- -IEC 61000-4-2 (ESD) immunity test
Air discharge: $\pm 25\text{kV}$
Contact discharge: $\pm 20\text{kV}$
- -IEC61000-4-4 (EFT) 40A (5/50ns)
- -IEC61000-4-5(Lightning):4.0A(8/20 μs)
- These are Pb-Free Devices
- Response Time is Typically < 1 ns

Mechanical Characteristics

- Package: SOT23-6
- Lead Finish: Matte Tin
- Case Material: "Green" Molding Compound
- Terminal Connections: See Diagram Below
- - IEC 61000-4-2 (ESD) immunity test

Applications



- Cellular Handsets and Accessories
- Personal Digital Assistants
- USB 2.0 and USB3.0 power and data line
- Notebooks and Handhelds

Dimensions and Pin Configuration

SOT26



Top View



Absolute Maximum Ratings(T_{amb}=25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20μs)	P _{pp}	150	W
Peak Pulse Current (8/20μs)	I _{pp}	4.0	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	VESD	±25 ±20	KV
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{stg}	-55 to +150	°C

Electrical Characteristics (T_A=25°C unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	VRWM	--	3.3	5.5	V	Any I/O pin to ground
Breakdown Voltage	VBR	--	6.5	--	V	I _T = 1mA,Any I/O pin to ground
Reverse Leakage Current	I _R	--	--	1	uA	VRWM=5.5V,Any I/O pin to ground
Clamping Voltage	VC	--	--	10	V	I _{pp} =1A(8x 20us pulse), Any I/O pin to ground
Clamping Voltage	VC	--	--	12	V	I _{pp} =4A(8x 20us pulse), Any I/O pin to ground
Clamping Voltage	VC	--	--	15	V	I _{pp} =10A(8x 20us pulse), VCC pin to ground
Junction Capacitance	C _{vo-GND}	--	0.6	--	pF	VR=0V,f=1MHz, Any I/O to GND
	C _{I/O- I/O}	--	0.3	0.5	pF	VR=0V,f=1MHz, between I/O pins

Characteristic Curves

Fig1. 8/20 μ s Pulse Waveform

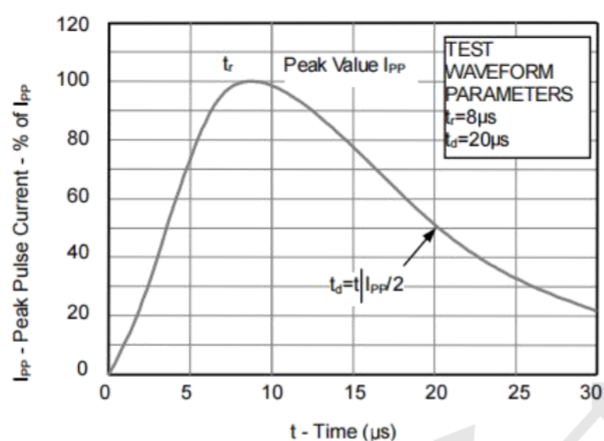


Fig2. ESD Pulse Waveform (according to IEC 61000-4-2)




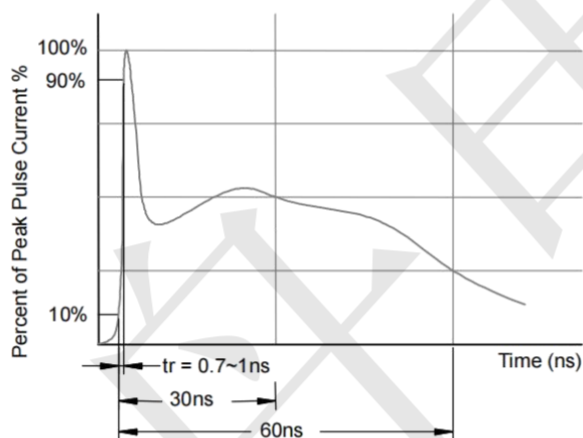


Fig3. Power Derating Curve

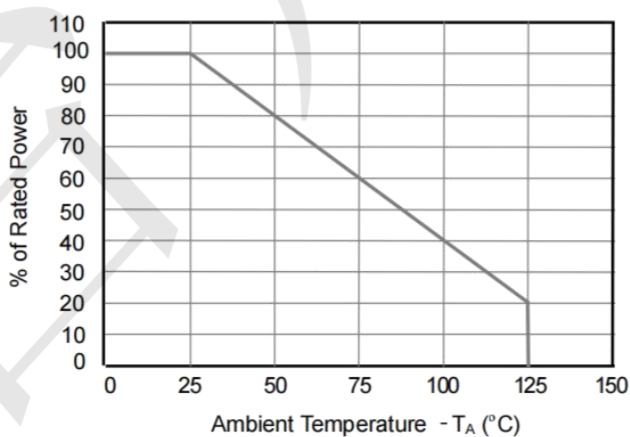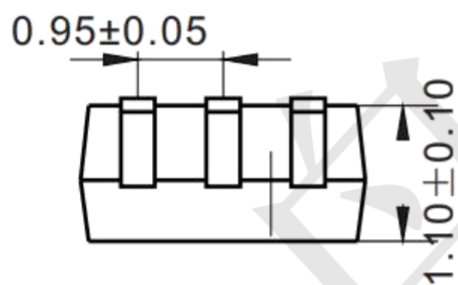

Package information (Unit: mm)

SOT23-6

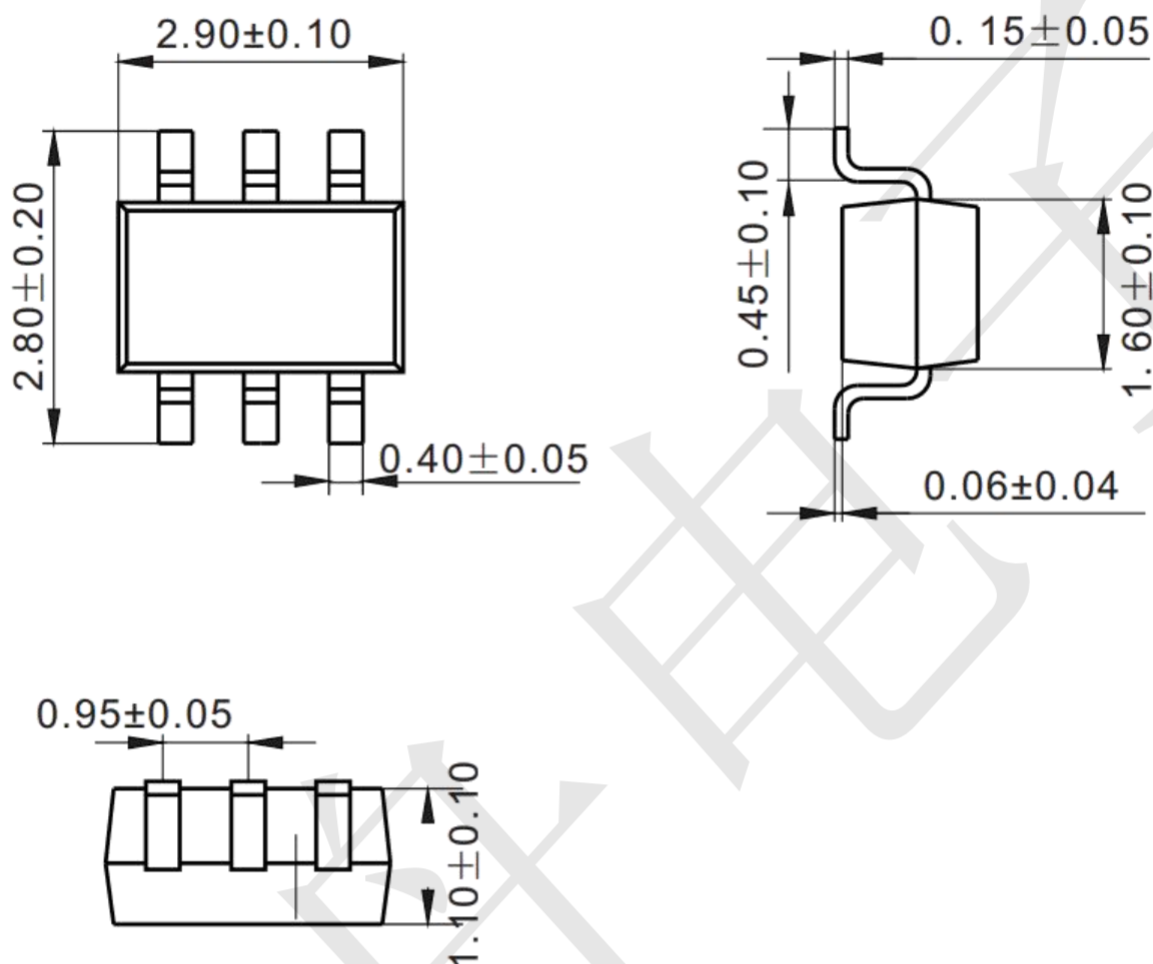

Mounting Pad Layout (unit: mm)

