


Features

- Wide Operation Voltage Range of 1V to 7V
- Correct Logic Output Guaranteed to $V_{CC}=1.0V$
- 200ms Reset Pulse Width
- Independent Watchdog Timer-1.6s Timeout
- Power-Supply Transient Immunity
- 4 μA Supply Current

Applications

- Computers
- Embedded Systems
- Industrial Equipments
- Intelligent Instruments

Pin Definition

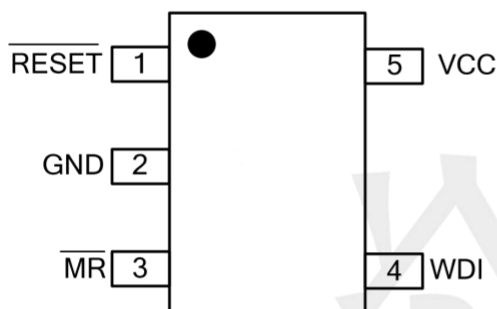

General Description

The series are cost effective system power supply supervisory circuits designed to monitor the power supplies in digital systems. This family provides circuit initialization and timing supervision. Independent watchdog monitoring circuitry and manual reset input are included. They significantly improve system reliability and accuracy compared to separate ICs or discrete components.

Ordering Information

TPCAT823STDI-GT3


PACKAGE TYPE
TDI :SOT23-5

RESET VOLTAGE:
L=4.63V
M=4.38V
J=4.00V
T=3.08V
S=2.93V
R=2.63V
Z=2.32V
Z=2.19V


PIN CONFIGURATION

PIN	NAME	FUNCTION
1	$\overline{\text{RESET}}$	Active-Low Reset Output. Pulses low for 200ms when triggered, and remains low whenever VCC is below the reset threshold or when $\overline{\text{MR}}$ is a logic low. It remains low for 200ms after one of the following occurs: VCC rises above the reset threshold, the watchdog triggers a reset, or $\overline{\text{MR}}$ goes low to high.
2	GND	Ground
3	$\overline{\text{MR}}$	Manual-Reset Input triggers a reset pulse when pulled below 0.3VCC. The active-low input has an internal 52k Ω pull-up resistor. It can be driven from a TTL or CMOS logic line as well as shorted to ground with a switch. Leave open or connect to VCC if unused.
4	WDI	Watchdog Input. If WDI remains either high or low for longer than the watchdog timeout period, the internal watchdog timer runs out and a reset is triggered. The internal watchdog timer clears whenever reset is asserted, or whenever WDI sees a rising or falling edge. If WDI is left unconnected or is connected to a three-stated buffer output, the watchdog feature is disabled.
5	VCC	Supply Voltage

TYPICAL APPLICATION CIRCUIT

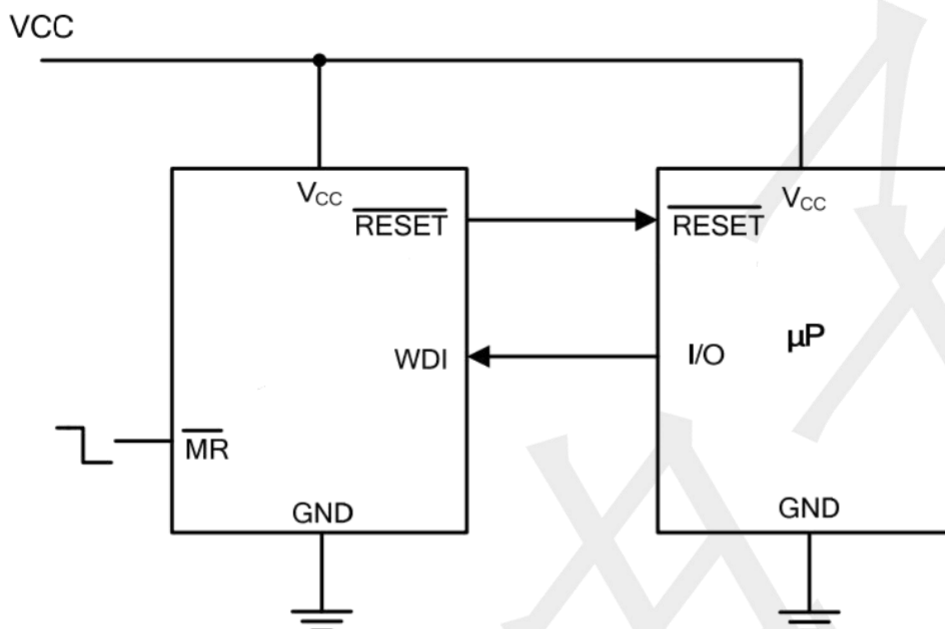

FUNCTIONAL BLOCK DIAGRAM

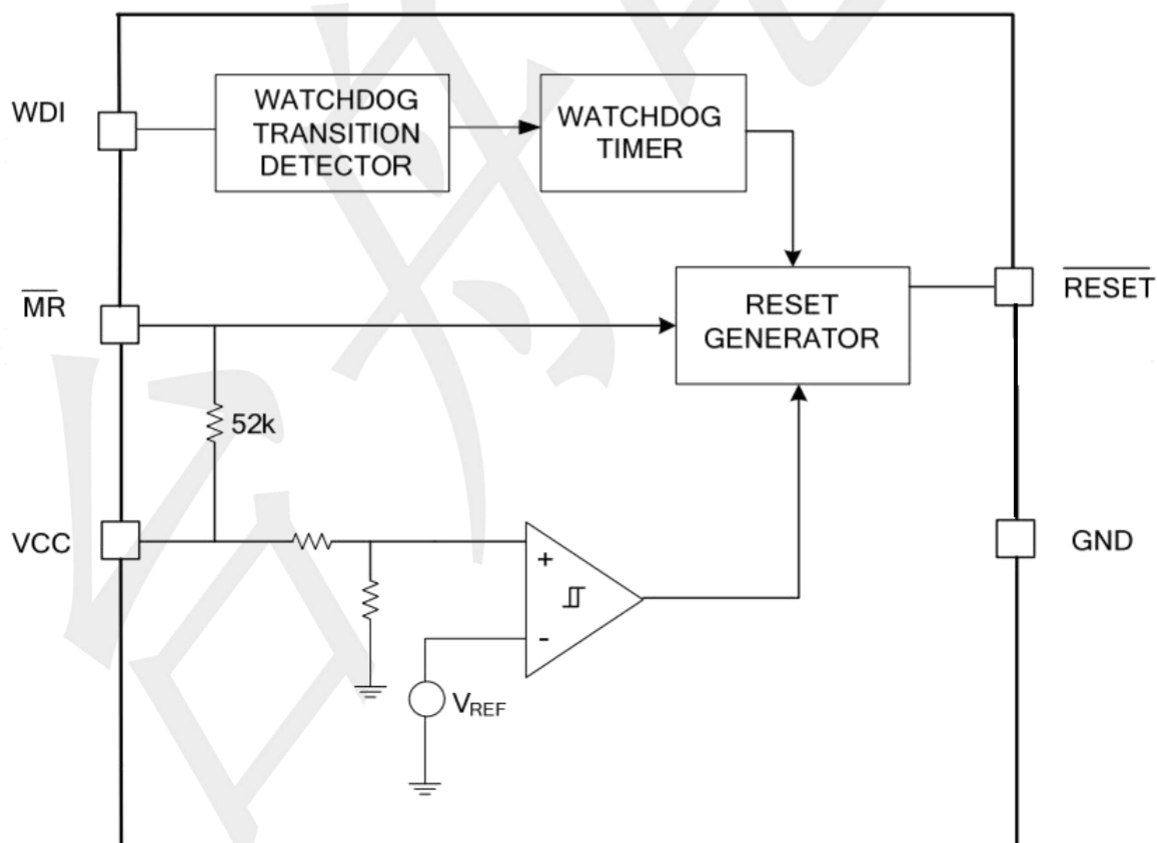

Absolute Maximum Ratings (Note 1)

Symbol	Parameter		Value	Unit
V _{CC}	Supply Voltage		-0.3 to +8.0	V
	$\overline{\text{RESET}}$, $\overline{\text{MR}}$, $\overline{\text{WDI}}$		-0.3 to (V _{CC} +0.3)	
I _{CC}	Input Current, V _{CC} , $\overline{\text{MR}}$, $\overline{\text{WDI}}$		20	mA
I _O	Output Current, $\overline{\text{RESET}}$		20	mA
P _D	Continuous Power Dissipation	SOT23-5	300	mW
T _A	Operating Temperature Range		-40 to +85	°C
T _{STG}	Storage Temperature Range		-65 to +150	°C
	Lead Temperature (Soldering, 10s)		+300	°C

Note 1: Stresses beyond those listed under “Absolute maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note 1: Stresses beyond those listed under “Absolute maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD Ratings

Symbol	ESD Mode	Value	Unit
HBM	Human Body Mode	±2000	V
CDM	Charged Device Mode	±500	

Electrical Characteristics

(VCC=4.75V to 5.5V for L version, VCC=4.5V to 5.5V for M version, VCC=3.15V to 3.6V for T version, VCC=3.0V to 3.6V for S version, VCC=2.7V to 3.6V for R version, VCC=2.38V to 2.75V for Z version, VCC=2.25V to 2.75V for Y version, TA=-40°C to +125°C, unless otherwise noted. Typical values are at TA=+25°C.) (Note 2)

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
V _{CC}	Supply Voltage Range	T _A =0°C to +70°C		1.0	--	7	V
		T _A =T _{MIN} to T _{MAX}		1.2	--	7	V
I _{CC}	Supply Current	WDI and MR unconnected	L/M	--	4	6	μA
			T/S/R/Z/Y	--	3	6	
V _{TH+}	Reset Threshold	L Version	T _A =+25°C	4.56	4.63	4.70	V
			T _A =T _{MIN} to T _{MAX}	4.50	--	4.75	
		M Version	T _A =+25°C	4.31	4.38	4.45	
			T _A =T _{MIN} to T _{MAX}	4.25	--	4.50	
		T Version	T _A =+25°C	3.04	3.08	3.11	
			T _A =T _{MIN} to T _{MAX}	3.00	--	3.15	
		S Version	T _A =+25°C	2.89	2.93	2.96	
			T _A =T _{MIN} to T _{MAX}	2.85	--	3.00	
		R Version	T _A =+25°C	2.59	2.63	2.66	
			T _A =T _{MIN} to T _{MAX}	2.55	--	2.70	
		Z Version	T _A =+25°C	2.28	2.32	2.35	
			T _A =T _{MIN} to T _{MAX}	2.25	--	2.38	
		Y Version	T _A =+25°C	2.16	2.19	2.22	
			T _A =T _{MIN} to T _{MAX}	2.13	--	2.25	
	Reset Threshold Hysteresis	L/M		--	20	--	mV
		T/S/R/Z/Y		--	10	--	
	Reset Threshold Tempco			--	100	--	ppm/°C
t _{RP}	Reset Timeout Period			140	200	280	ms
	V _{CC} to RESET Delay	V _{RST} -V _{CC} =100mV		--	20	--	μs

Electrical Characteristics

(VCC=4.75V to 5.5V for L version, VCC=4.5V to 5.5V for M version, VCC=3.15V to 3.6V for T version, VCC=3.0V to 3.6V for S version, VCC=2.7V to 3.6V for R version, VCC=2.38V to 2.75V for Z version, VCC=2.25V to 2.75V for Y version, TA=-40°C to +125°C, unless otherwise noted. Typical values are at TA=+25°C.) (Note 2)

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{OH}	RESET	V _{CC} =V _{RST} max I _{SOURCE} =1mA	0.8V _{CC}	--	--	V
V _{OL}	Output Voltage	V _{CC} =V _{RST} min I _{SINK} =4mA	--	--	0.3	
WATCHDOG INPUT						
t _{WD}	Watchdog Timeout Period		1.12	1.60	2.40	s
t _{WDI}	WDI Pulse Width	V _{IL} <0.15V _{CC} , V _{IH} >0.85V _{CC}	50	--	--	ns
V _{IL}	WDI Input Voltage (Note 4)		--	--	0.15V _{CC}	V
V _{IH}			0.85V _{CC}	--	--	
	WDI Input Current	WDI=V _{CC}	1	--	20	μA
		WDI=GND	-20	--	-1	
MANUAL RESET INPUT						
V _{IL}	MR Input Voltage		--	--	0.15V _{CC}	V
V _{IH}			0.85V _{CC}	--	--	
	MR Pulse Width		1.0	--	--	μs
	MR Noise Immunity(Pulse width with no reset)		--	100	--	ns
	MR to Reset Delay		--	500	--	ns
	MR Pullup Resistance(internal)		35	52	75	kΩ


Note 2: Over temperature limits are guaranteed by design and not production tested.

Note 3: The RESET short-circuit current is the maximum pullup current when RESET is driven low by a μP bidirectional reset pin.


Note 4: WDI is internally serviced within the watchdog period if WDI is left unconnected.

Typical Operating Characteristics


Quiescent Current vs. Input Voltage@Ta=20°C

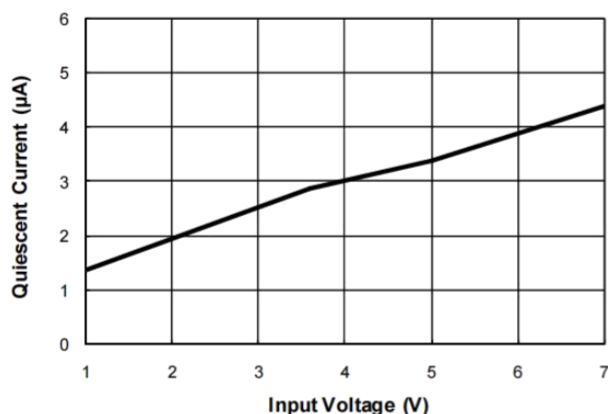


Quiescent Current vs. Temperature @VCC=5V

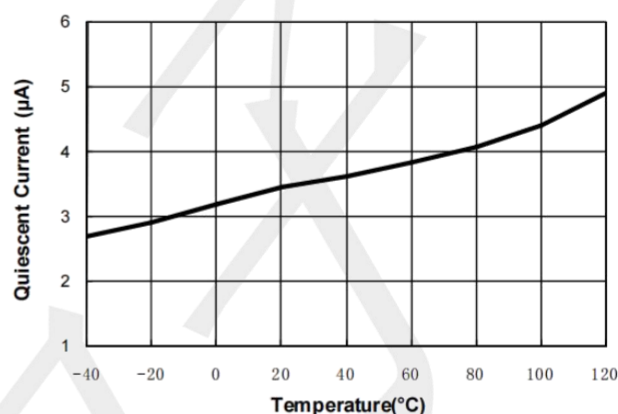


RESET Timeout Period vs. Temperature@VCC=5V

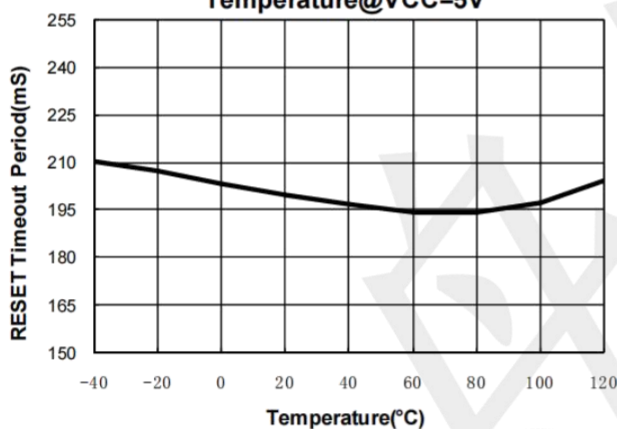

Watchdog Timeout Period vs. Temperature@VCC=5V

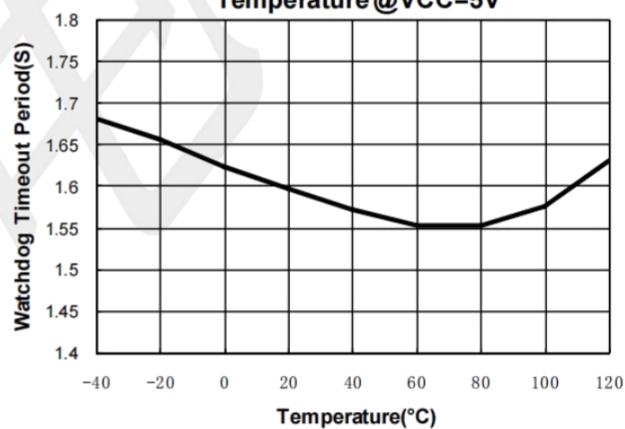


Normalized Input Threshold Voltage vs. Temperature

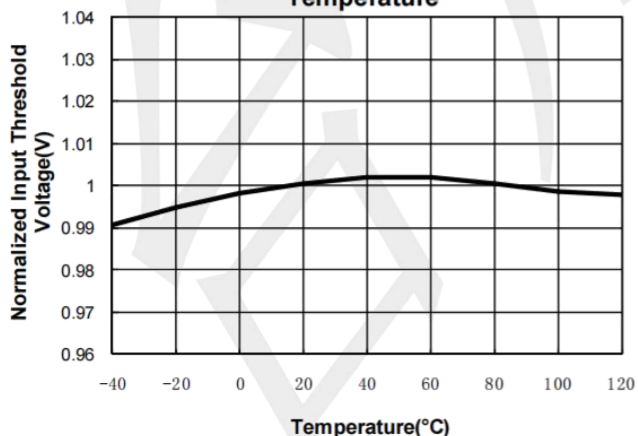

Package Outline Dimensions (unit: mm)

SOT23-5

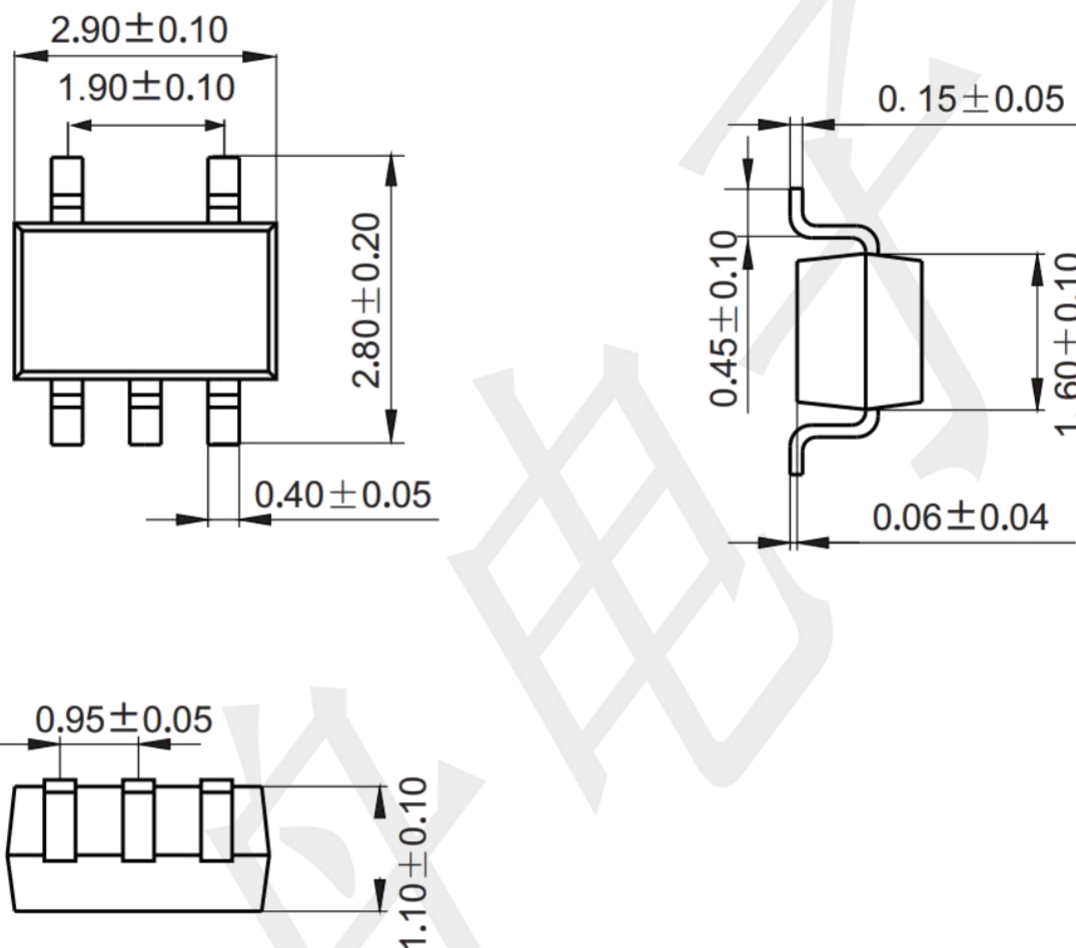

Mounting Pad Layout (unit: mm)

