

P-Ch 60V Fast Switching MOSFETs

Features

- Split Gate Trench MOSFET technology
- Excellent package for heat dissipation
- High density cell design for low $R_{DS(ON)}$

Applications



- DC-DC Converters
- Power management functions
- Synchronous-rectification applications

Product Summary



BVDSS	RDSON	ID
-60V	31mΩ	-30A

PDFN5060-8L Pin Configuration



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-60	V
V_{GS}	Gate-Source Voltage	± 20	V
$I_D@T_A=25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ -4.5V ¹	-30	A
$I_D@T_A=70^\circ\text{C}$	Continuous Drain Current, V_{GS} @ -4.5V ¹	-15	A
I_{DM}	Pulsed Drain Current ²	-120	A
$P_D@T_A=25^\circ\text{C}$	Total Power Dissipation ³	89	W
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Thermal Resistance Junction-ambient ¹	---	60	$^\circ\text{C/W}$
$R_{\theta JC}$	Thermal Resistance Junction-Case ¹	---	1.4	$^\circ\text{C/W}$

P-Ch 60V Fast Switching MOSFETs

Electrical Characteristics ($T_J=25\text{ }^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=-250\mu A$	-60	---	---	V
$\Delta BV_{DSS}/\Delta T_J$	BV_{DSS} Temperature Coefficient	Reference to 25°C , $I_D=-1\text{mA}$	---	---	---	V/ $^{\circ}\text{C}$
$R_{DS(ON)}$	Static Drain-Source On-Resistance ²	$V_{GS}=-10V$, $I_D=-3A$	---	31	38	$\text{m}\Omega$
		$V_{GS}=-4.5V$, $I_D=-2A$	---	40	50	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=-250\mu A$	-1.3	-1.7	-2.3	V
$\Delta V_{GS(th)}$	$V_{GS(th)}$ Temperature Coefficient		---	---	---	mV/ $^{\circ}\text{C}$
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-60V$, $V_{GS}=0V$, $T_J=25^{\circ}\text{C}$	---	---	1	μA
		$V_{DS}=-60V$, $V_{GS}=0V$, $T_J=55^{\circ}\text{C}$	---	---	5	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=-5V$, $I_D=-3A$	---	---	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	13	---	Ω
Q_g	Total Gate Charge (-4.5V)	$V_{DS}=-30V$, $V_{GS}=-10V$, $I_D=-10A$	---	13.4	---	nC
Q_{gs}	Gate-Source Charge		---	3.35	---	
Q_{gd}	Gate-Drain Charge		---	1.82	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-30V$, $V_{GS}=-10V$, $R_G=5.0\Omega$, $I_D=-10A$	---	10	---	ns
T_r	Rise Time		---	6	---	
$T_{d(off)}$	Turn-Off Delay Time		---	23	---	
T_f	Fall Time		---	11	---	
C_{iss}	Input Capacitance	$V_{DS}=-30V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	862	---	pF
C_{oss}	Output Capacitance		---	163	---	
C_{rss}	Reverse Transfer Capacitance		---	8	---	

Diode Characteristics


Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current ^{1,5}	$V_G=V_D=0V$, Force Current	---	---	-30	A
V_{SD}	Diode Forward Voltage ²	$V_{GS}=0V$, $I_S=-1A$, $T_J=25^{\circ}\text{C}$	---	---	-1.2	V
t_{rr}	Reverse Recovery Time	$I_F=-10A$, $di/dt=100A/\mu s$,	---	18	---	nS
Q_{rr}	Reverse Recovery Charge	$T_J=25^{\circ}\text{C}$	---	27	---	nC

Note :


- 1.The data tested by surface mounted on a 1 inch² FR-4 board with 20Z copper.
- 2.The data tested by pulsed , pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$
- 3.The EAS data shows Max. rating . The test condition is $V_{DD}=-30V$, $V_{GS}=-10V$, $L=1\text{mH}$
- 4.The power dissipation is limited by 150°C junction temperature
- 5.The data is theoretically the same as I_D and I_{DM} , in real applications , should be limited by total power dissipation.

Characteristics Curve:


Typ. output characteristics
 $-I_D = f(-V_{DS})$

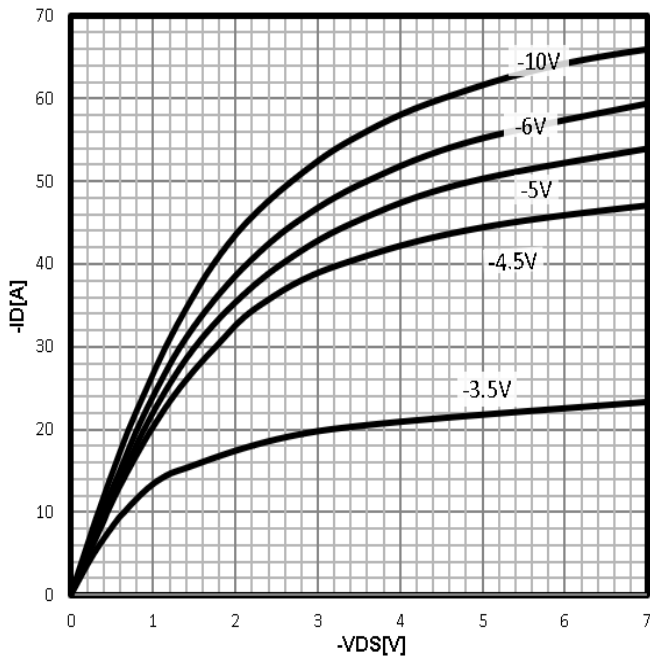


Typ. drain-source on resistance
 $R_{DS(on)} = f(-I_D)$

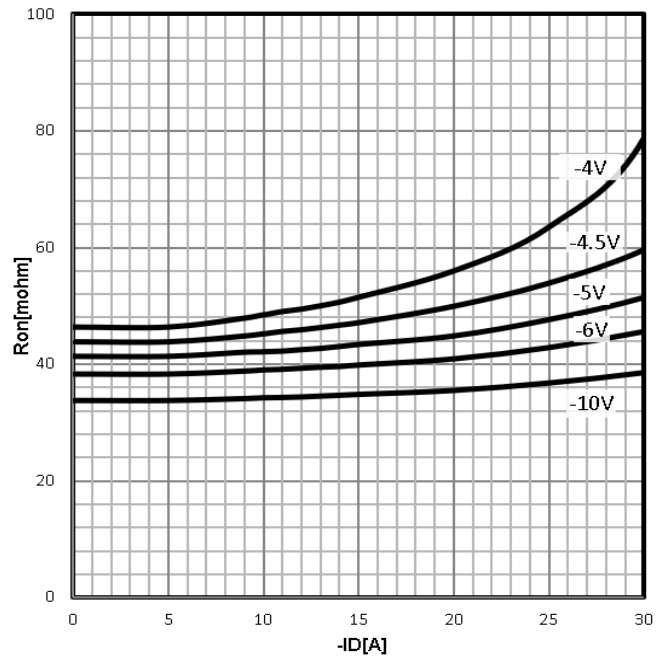

Typ. transfer characteristics
 $-I_D = f(-V_{GS})$

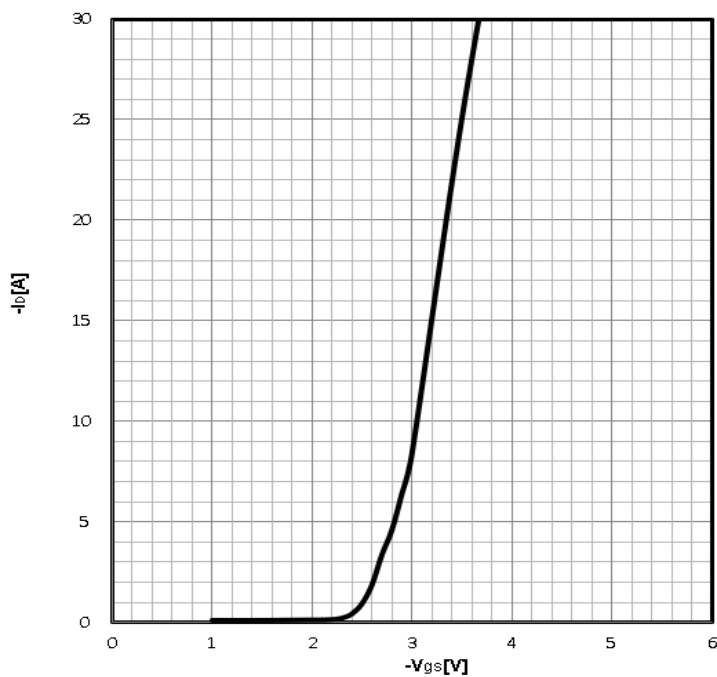


Drain-source on-state resistance
 $R_{DS(on)} = f(T_j)$; $I_D = -20A$; $V_{GS} = -10V$

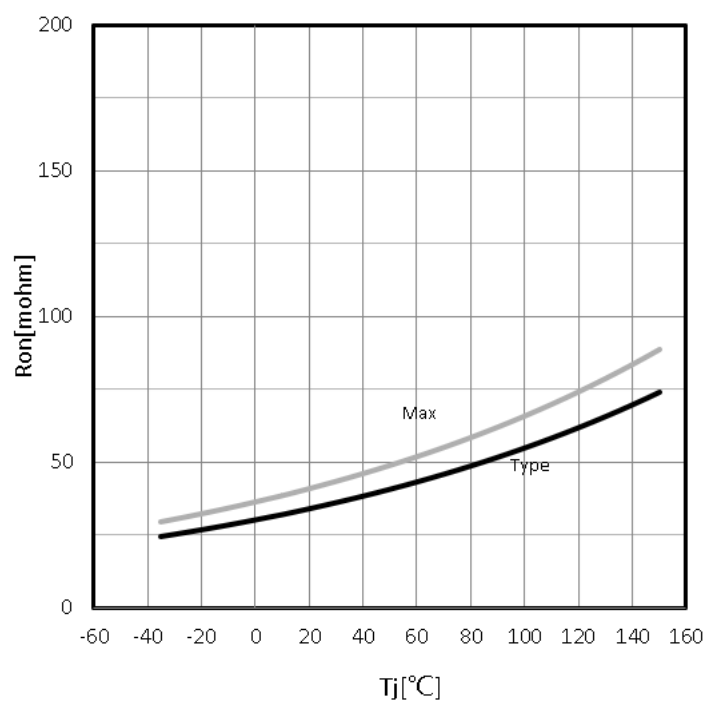


Gate Threshold Voltage

$$-V_{TH}=f(T_j); I_D=-250\mu A$$

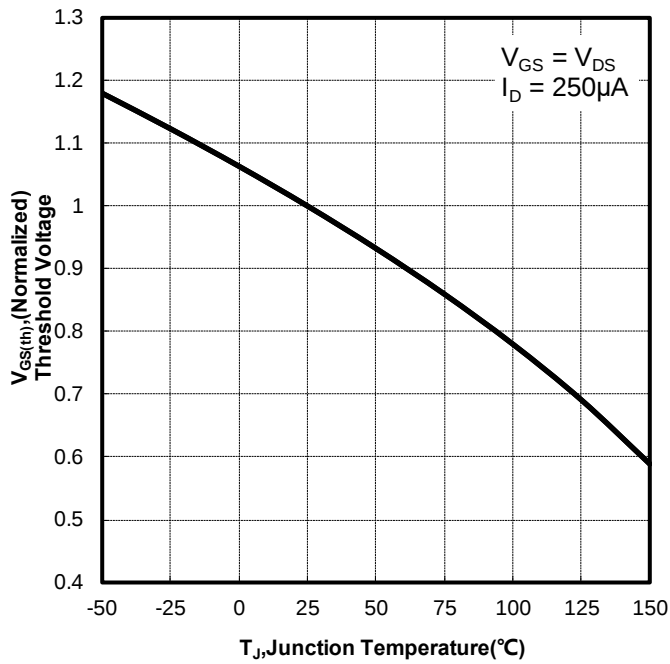


Drain-source breakdown voltage

$$-V_{BR(DSS)}=f(T_j); I_D=-250\mu A$$

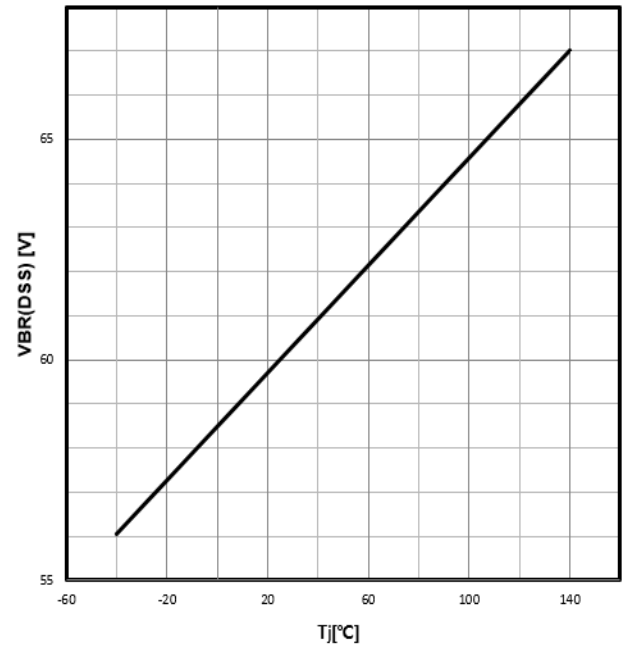


Typ. gate charge

$$-V_{GS}=f(Q_g); I_D=-20A$$

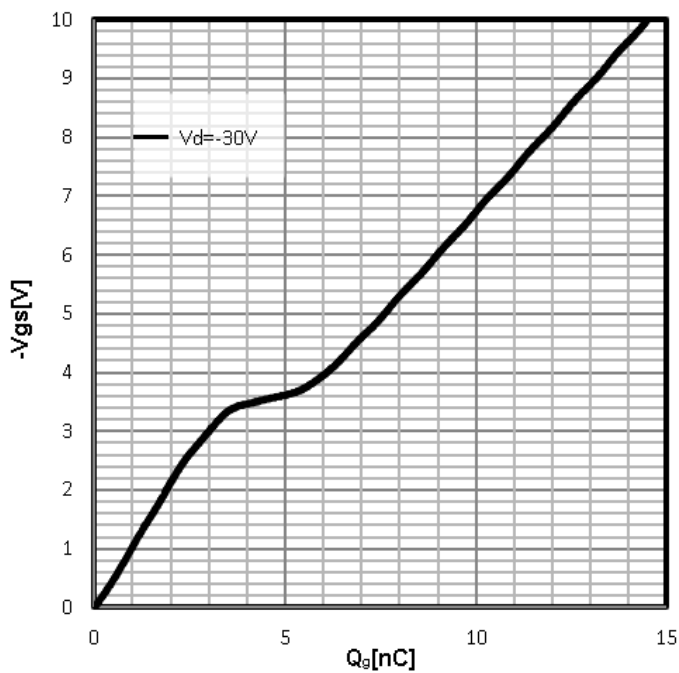


Typ. capacitances


$$C=f(-V_{DS}); V_{GS}=0V; f=1MHz$$

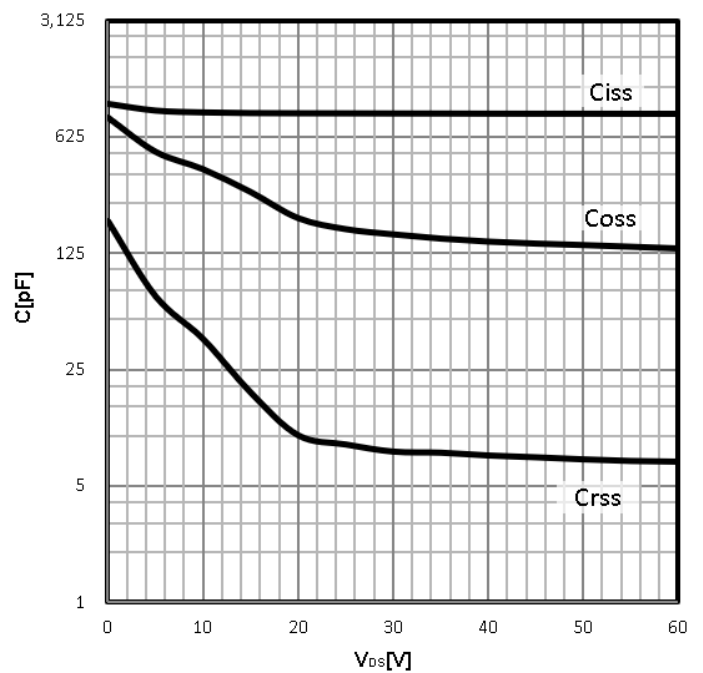


Power Dissipation
 $P_{tot}=f(T_C)$

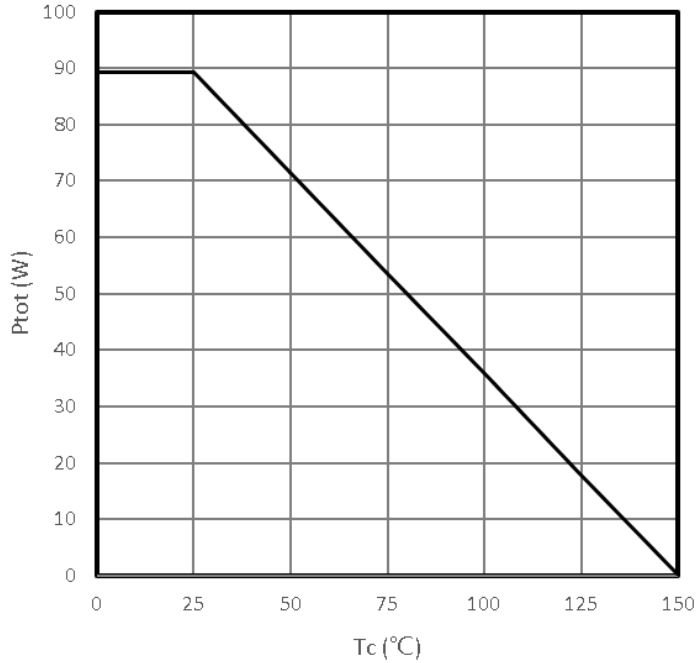


Maximum Drain Current
 $-I_D=f(T_C)$

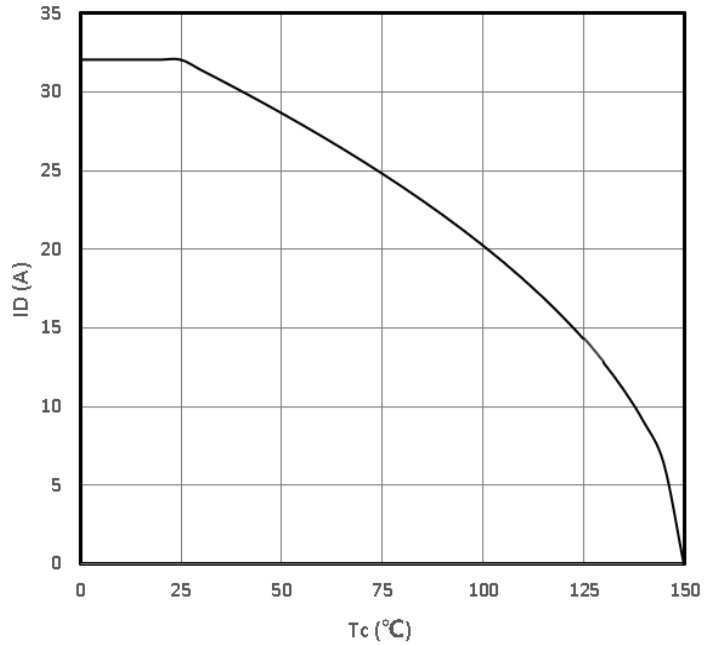


Safe operating area
 $-I_D=f(-V_{DS})$

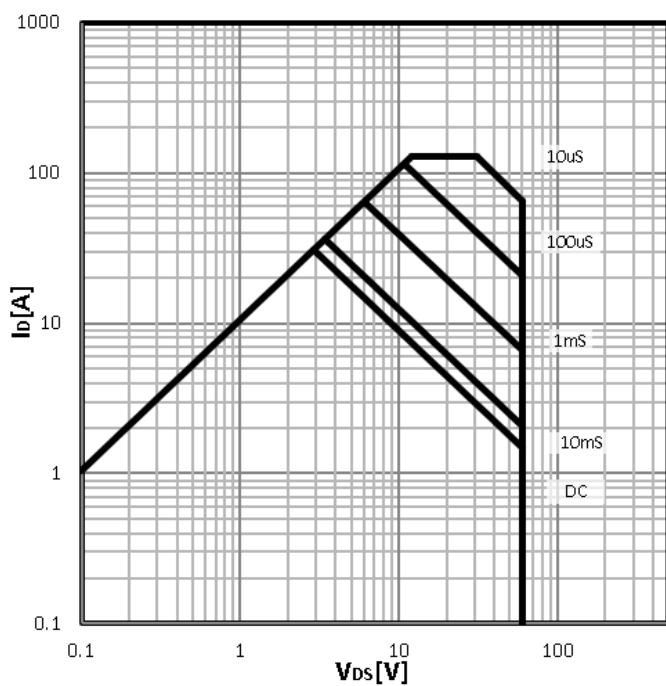


Body Diode Forward Voltage Variation
 $-I_F=f(-V_{DS})$

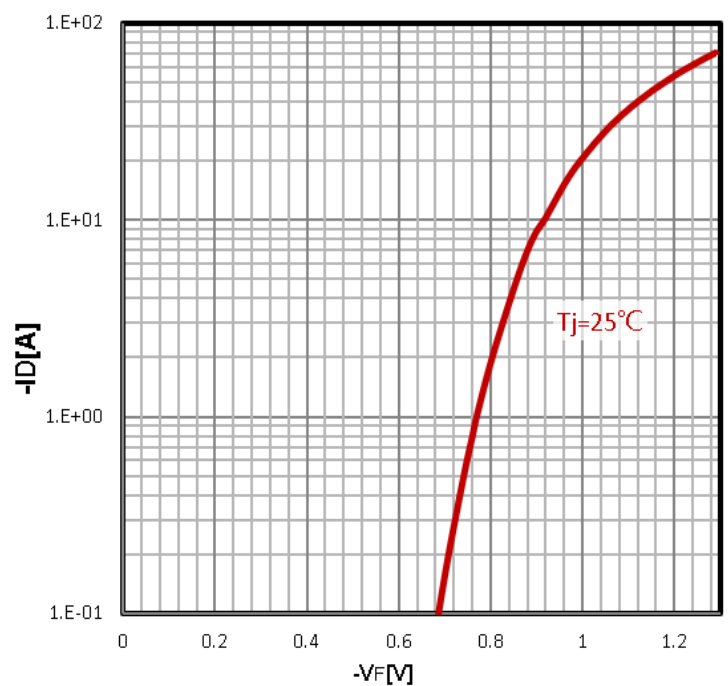

Max. transient thermal impedance $Z_{thJC}=f(t_p)$

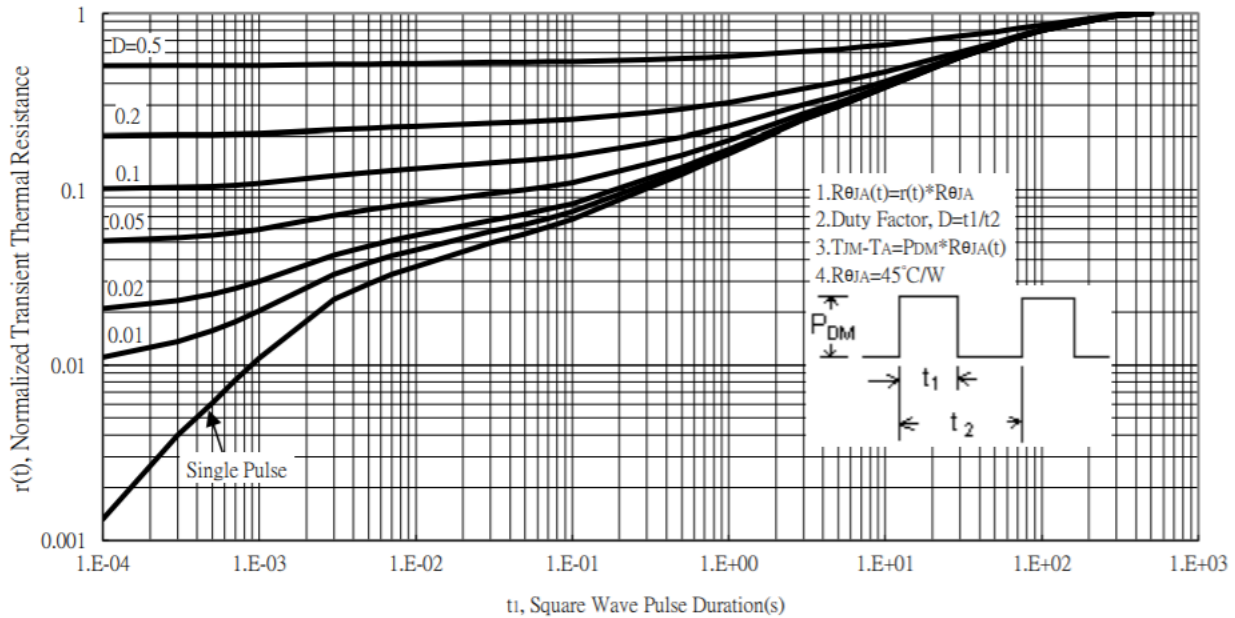

Package Mechanical Data-PDFN5060-8L-Single

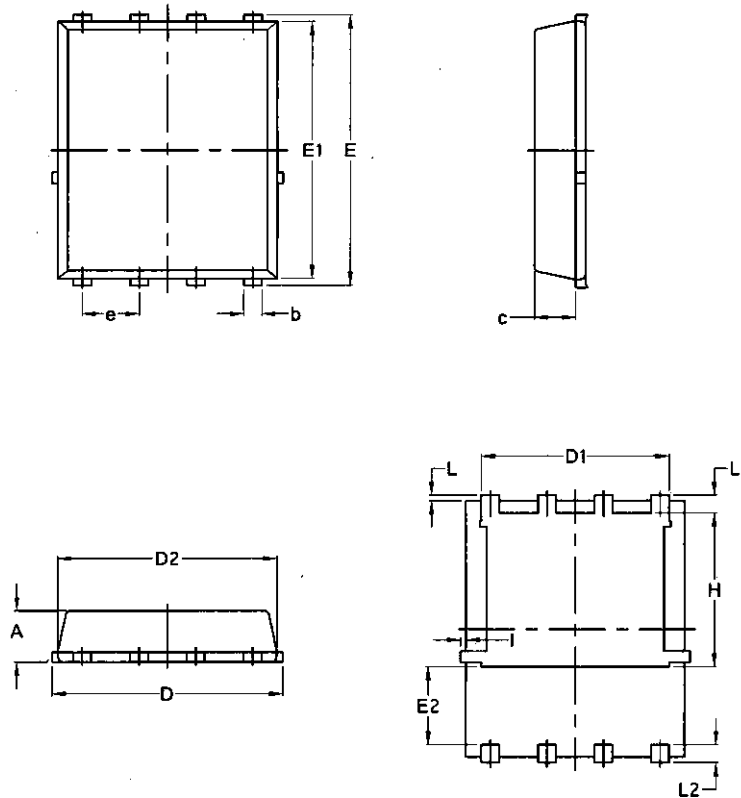

Symbol	Common			
	mm		Inch	
	Mim	Max	Min	Max
A	1.03	1.17	0.0406	0.0461
b	0.34	0.48	0.0134	0.0189
c	0.824	0.0970	0.0324	0.082
D	4.80	5.40	0.1890	0.2126
D1	4.11	4.31	0.1618	0.1697
D2	4.80	5.00	0.1890	0.1969
E	5.95	6.15	0.2343	0.2421
E1	5.65	5.85	0.2224	0.2303
E2	1.60	/	0.0630	/
e	1.27 BSC		0.05 BSC	
L	0.05	0.25	0.0020	0.0098
L1	0.38	0.50	0.0150	0.0197
L2	0.38	0.50	0.0150	0.0197
H	3.30	3.50	0.1299	0.1378
I	/	0.18	/	0.0070