

为 您 的 产 品 保 驾 护 航

PRODUCT DATASHEET

Surface Mount PTC Devices

ASMD1210SL Series Surface Mount PTC Devices



Description

The ASMD1210SL series provides surface mount resettable overcurrent protection with holding current from 1.5A to 7.5A.

This series is suitable for wide range of applications in modern electronics where space is limited.

Features

- RoHS compliant
- Halogen-free
- Faster tripping
- 1210 Dimension
- Surface mountable
- Solid state
- Operating Current: 1.5A~7.5A, @25℃
- Maximum Voltage: 6V/12V
- Operating Temperature: -40℃ ~ 85℃
- Certification: ROHS,UL

Agency Approvals

Agency	File Number
	Pending

Regulation	Standard
	2002/95/EC
	EN14582

Applications

- Battery PCM
- Game console port protection
- USB hubs, ports and peripherals
- Optical disk drives
- Set-top-box and HDMI
- General electronics

Electrical Characteristics

Model	V _{max} (V)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance	
						Current (A)	Time (Sec)	R _{i min} (Ω)	R _{1max} (Ω)
ASMD1210SL150	6.0	50	1.50	3.0	0.8	8.0	2.0	0.010	0.060
ASMD1210SL150-12V	12	50	1.50	3.0	0.8	8.0	2.0	0.010	0.060
ASMD1210SL175	6.0	50	1.75	3.5	0.8	8.0	2.0	0.005	0.040
ASMD1210SL175-12V	12	50	1.75	3.5	0.8	8.0	2.0	0.005	0.040
ASMD1210SL190	6.0	50	1.90	3.8	0.8	8.0	3.0	0.006	0.037
ASMD1210SL190-12V	12	50	1.90	3.8	0.8	8.0	3.0	0.006	0.037
ASMD1210SL200	6.0	50	2.00	4.0	0.8	8.0	3.0	0.006	0.035
ASMD1210SL200-12V	12	50	2.00	4.0	0.8	8.0	3.0	0.006	0.035
ASMD1210SL260	6.0	50	2.60	5.2	0.8	13.0	2.0	0.003	0.025
ASMD1210SL260-12V	12	50	2.60	5.2	0.8	13.0	2.0	0.003	0.025
ASMD1210SL300	6.0	50	3.00	6.0	0.8	15.0	2.0	0.003	0.020
ASMD1210SL300-12V	12	50	3.00	6.0	0.8	15.0	2.0	0.003	0.020
ASMD1210SL350	6.0	50	3.50	7.0	0.8	17.5	2.0	0.002	0.018
ASMD1210SL350-12V	12	50	3.50	7.0	0.8	17.5	2.0	0.002	0.018
ASMD1210SL380	6.0	50	3.80	7.6	0.8	19.0	2.0	0.002	0.016
ASMD1210SL380-12V	12	50	3.80	7.6	0.8	19.0	2.0	0.002	0.016
ASMD1210SL400	6.0	50	4.00	8.0	0.8	20.0	2.0	0.002	0.014
ASMD1210SL400-12V	12	50	4.00	8.0	0.8	20.0	2.0	0.002	0.014
ASMD1210SL450	6.0	50	4.50	9.0	1.0	22.5	2.0	0.001	0.013
ASMD1210SL450-12V	12	50	4.50	9.0	1.0	22.5	2.0	0.001	0.013
ASMD1210SL500	6.0	50	5.00	10.0	1.0	25.0	2.0	0.001	0.012
ASMD1210SL500-12V	12	50	5.00	10.0	1.0	25.0	2.0	0.001	0.012
ASMD1210SL550	6.0	50	5.50	11.0	1.0	27.5	2.0	0.001	0.011
ASMD1210SL550-12V	12	50	5.50	11.0	1.0	27.5	2.0	0.001	0.011
ASMD1210SL600	6.0	50	6.00	12.0	1.2	30.0	2.0	0.001	0.010
ASMD1210SL600-12V	12	50	6.00	12.0	1.2	30.0	2.0	0.001	0.010
ASMD1210SL650	6.0	50	6.50	13.0	1.2	32.5	2.0	0.001	0.009
ASMD1210SL650-12V	12	50	6.50	13.0	1.2	32.5	2.0	0.001	0.009
ASMD1210SL700	6.0	50	7.00	14.0	1.2	35.0	2.0	0.001	0.008
ASMD1210SL700-12V	12	50	7.00	14.0	1.2	35.0	2.0	0.001	0.008
ASMD1210SL750	6.0	50	7.50	15.0	1.2	37.5	2.0	0.001	0.007
ASMD1210SL750-12V	12	50	7.50	15.0	1.2	37.5	2.0	0.001	0.007

I_{hold} = Hold Current. Maximum current device will not trip in 25°C still air.

I_{trip} = Trip Current. Minimum current at which the device will always trip in 25°C still air.

V_{max} = Maximum operating voltage device can withstand without damage at rated current (I_{max}).

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).

P_d = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

$R_{i\ min/max}$ = Minimum/Maximum device resistance prior to tripping at 25°C.

R_{1max} = Maximum device resistance is measured one hour post reflow.

CAUTION : Operation beyond the specified ratings may result in damage and possible arcing and flame.

Test Procedures and Requirements

Test	Conditions	Accept/Reject Criteria
Initial Resistance	In still air at 25°C	$R_{imin} \leq R \leq R_{1max}$
Time to Trip	Specified current, V_{max} , 25°C	$T \leq \text{Maximum Time to Trip}$
Holding Current	30min, at I_H , @25°C	No trip
Trip Endurance	V_{max} , I_{max} 1 hour	No arcing or burning

Physical Characteristics

Terminal Materials	Tin-Plated Nickle-copper
Soldering Zone	Meets EIA specification RS 186-9E and ANSI/J-STD-002 Category 3.
Moisture Sensitivity	Level 2a, per IPC/JEDEC J-STD 020C


Environmental Specifications

Test	Conditions	Resistance change
Passive aging	+85°C, 1000 hrs.	±10% typical
Humidity aging	+85°C, 85% R.H., 100 hours	±5% typical
Thermal shock	MIL-STD-202, Method 107G +85°C to -40°C, 20 times	-30% typical
Resistance to solvent	MIL-STD-202, Method 215	No change
Vibration	MIL-STD-883C, Test Condition A	No change

Thermal Derating Chart

Model	Maximum ambient operating temperature (T_{mao}) vs. hold current (I_{hold})								
	- 40°C	- 20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
ASMD1210SL150	2.25	2.00	1.75	1.50	1.33	1.15	1.05	0.93	0.70
ASMD1210SL150-12V	2.25	2.00	1.75	1.50	1.33	1.15	1.05	0.93	0.70
ASMD1210SL175	2.55	2.33	2.02	1.75	1.53	1.35	1.23	1.07	0.85
ASMD1210SL175-12V	2.55	2.33	2.02	1.75	1.53	1.35	1.23	1.07	0.85
ASMD1210SL190	2.81	2.53	2.20	1.90	1.67	1.47	1.34	1.17	0.91
ASMD1210SL190-12V	2.81	2.53	2.20	1.90	1.67	1.47	1.34	1.17	0.91
ASMD1210SL200	2.96	2.67	2.32	2.00	1.76	1.55	1.41	1.23	0.96
ASMD1210SL200-12V	2.96	2.67	2.32	2.00	1.76	1.55	1.41	1.23	0.96
ASMD1210SL260	3.85	3.47	3.02	2.60	2.29	2.01	1.84	1.59	1.25
ASMD1210SL260-12V	3.85	3.47	3.02	2.60	2.29	2.01	1.84	1.59	1.25
ASMD1210SL300	4.44	4.00	3.48	3.00	2.64	2.32	2.12	1.84	1.44
ASMD1210SL300-12V	4.44	4.00	3.48	3.00	2.64	2.32	2.12	1.84	1.44
ASMD1210SL350	5.18	4.67	4.06	3.50	3.08	2.71	2.47	2.15	1.68
ASMD1210SL350-12V	5.18	4.67	4.06	3.50	3.08	2.71	2.47	2.15	1.68
ASMD1210SL380	5.62	5.07	4.41	3.80	3.34	2.94	2.68	2.33	1.82
ASMD1210SL380-12V	5.62	5.07	4.41	3.80	3.34	2.94	2.68	2.33	1.82
ASMD1210SL400	5.92	5.33	4.64	4.00	3.52	3.09	2.83	2.45	1.92
ASMD1210SL400-12V	5.92	5.33	4.64	4.00	3.52	3.09	2.83	2.45	1.92
ASMD1210SL450	6.66	6.00	5.22	4.50	3.96	3.48	3.17	2.76	2.16
ASMD1210SL450-12V	6.66	6.00	5.22	4.50	3.96	3.48	3.17	2.76	2.16
ASMD1210SL500	7.40	6.67	5.80	5.00	4.40	3.87	3.53	3.07	2.40
ASMD1210SL500-12V	7.40	6.67	5.80	5.00	4.40	3.87	3.53	3.07	2.40
ASMD1210SL550	8.14	7.34	6.38	5.50	4.84	4.26	3.88	3.38	2.64
ASMD1210SL550-12V	8.14	7.34	6.38	5.50	4.84	4.26	3.88	3.38	2.64
ASMD1210SL600	8.65	7.91	6.93	6.00	5.23	4.45	4.00	3.63	2.85
ASMD1210SL600-12V	8.65	7.91	6.93	6.00	5.23	4.45	4.00	3.63	2.85
ASMD1210SL650	9.20	8.45	7.45	6.50	5.60	4.65	4.30	3.89	3.00
ASMD1210SL650-12V	9.20	8.45	7.45	6.50	5.60	4.65	4.30	3.89	3.00
ASMD1210SL700	9.84	9.00	7.95	7.00	5.96	4.95	4.50	4.16	3.20
ASMD1210SL700-12V	9.84	9.00	7.95	7.00	5.96	4.95	4.50	4.16	3.20
ASMD1210SL750	10.5	9.65	8.50	7.50	6.40	5.30	4.80	4.45	4.42
ASMD1210SL750-12V	10.5	9.65	8.50	7.50	6.40	5.30	4.80	4.45	4.42

Soldering Parameters

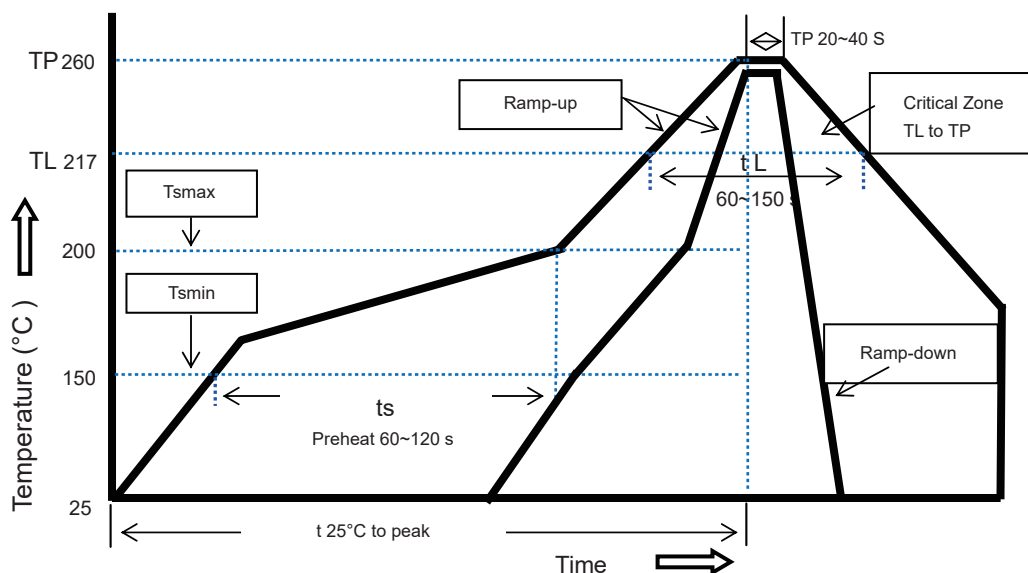

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate (Ts max to T p)	3 °C/second max.
Preheat	
-Temperature Min(Ts min)	150 °C
-Temperature Max(Ts max)	200 °C
-Time(Ts min to Ts max)	60~120 seconds
Time maintained above:	
-Temperature(TL)	217 °C
-Time(tL)	60~150 seconds
Peak/Classification Temperature(Tp)	260 °C
Time within 5 °C of actual peak temperature Time (TP)	30 seconds max.
Ramp down rate	3 °C/seconds max.
Time 25 °C to peak temperature	8 minutes max.


- Recommended reflow methods: IR, vapor phase oven, hot air oven, N2 environment for lead-free.
- Devices are not designed to be wave soldered to the bottom side of the board.
- Recommended maximum paste thickness is 0.25mm (0.010inch).
- Devices can be cleaned using standard industry methods and solvents.

Note 1: All temperature refer to topside of the package, measured on the package body surface.

Note 2: If reflow temperature exceed the recommended profile, devices may not meet the performance requirements.

Physical Dimensions(mm.)

Model	A		B		C		D	E
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Min.
ASMD1210SL150	3.0	3.43	2.35	2.8	0.3	0.7	0.25	0.1
ASMD1210SL150-12V	3.0	3.43	2.35	2.8	0.3	0.7	0.25	0.1
ASMD1210SL175	3.0	3.43	2.35	2.8	0.3	0.7	0.25	0.1
ASMD1210SL175-12V	3.0	3.43	2.35	2.8	0.3	0.7	0.25	0.1
ASMD1210SL190	3.0	3.43	2.35	2.8	0.3	0.7	0.25	0.1
ASMD1210SL190-12V	3.0	3.43	2.35	2.8	0.3	0.7	0.25	0.1
ASMD1210SL200	3.0	3.43	2.35	2.8	0.3	0.7	0.25	0.1
ASMD1210SL200-12V	3.0	3.43	2.35	2.8	0.3	0.7	0.25	0.1
ASMD1210SL260	3.0	3.43	2.35	2.8	0.4	1.0	0.25	0.1
ASMD1210SL260-12V	3.0	3.43	2.35	2.8	0.4	1.0	0.25	0.1
ASMD1210SL300	3.0	3.43	2.35	2.8	0.4	1.0	0.25	0.1
ASMD1210SL300-12V	3.0	3.43	2.35	2.8	0.4	1.0	0.25	0.1
ASMD1210SL350	3.0	3.43	2.35	2.8	0.4	1.2	0.25	0.1
ASMD1210SL350-12V	3.0	3.43	2.35	2.8	0.4	1.2	0.25	0.1
ASMD1210SL380	3.0	3.43	2.35	2.8	0.4	1.2	0.25	0.1
ASMD1210SL380-12V	3.0	3.43	2.35	2.8	0.4	1.2	0.25	0.1
ASMD1210SL400	3.0	3.43	2.35	2.8	0.5	1.2	0.25	0.1
ASMD1210SL400-12V	3.0	3.43	2.35	2.8	0.5	1.2	0.25	0.1
ASMD1210SL450	3.0	3.43	2.35	2.8	0.5	1.4	0.25	0.1
ASMD1210SL450-12V	3.0	3.43	2.35	2.8	0.5	1.4	0.25	0.1
ASMD1210SL500	3.0	3.43	2.35	2.8	0.5	1.4	0.25	0.1
ASMD1210SL500-12V	3.0	3.43	2.35	2.8	0.5	1.4	0.25	0.1
ASMD1210SL550	3.0	3.43	2.35	2.8	0.5	1.4	0.25	0.1
ASMD1210SL550-12V	3.0	3.43	2.35	2.8	0.5	1.4	0.25	0.1
ASMD1210SL600	3.0	3.43	2.35	2.8	0.5	1.6	0.25	0.1
ASMD1210SL600-12V	3.0	3.43	2.35	2.8	0.5	1.6	0.25	0.1
ASMD1210SL650	3.0	3.43	2.35	2.8	0.5	1.6	0.25	0.1
ASMD1210SL650-12V	3.0	3.43	2.35	2.8	0.5	1.6	0.25	0.1
ASMD1210SL700	3.0	3.43	2.35	2.8	0.5	1.6	0.25	0.1
ASMD1210SL700-12V	3.0	3.43	2.35	2.8	0.5	1.6	0.25	0.1
ASMD1210SL750	3.0	3.43	2.35	2.8	0.5	1.6	0.25	0.1
ASMD1210SL750-12V	3.0	3.43	2.35	2.8	0.5	1.6	0.25	0.1

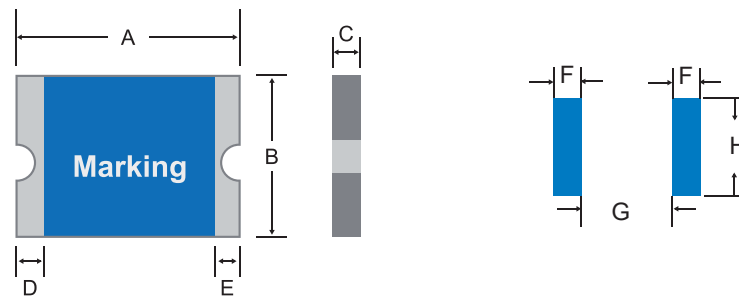

Recommended Solder Pad Layout Dimensions (mm.)

Device	F	G	H
	Normal Value	Normal Value	Normal Value
1210 Series	1.0	2.0	2.5

Tape And Reel Specifications (mm)

Governing Specifications


W	8.0 ± 0.30
P0	4.0 ± 0.10
P1	4.0 ± 0.10
P2	2.0 ± 0.05
A0	2.82 ± 0.10
B0	3.46 ± 0.10
D0	1.55 ± 0.05
F	3.5 ± 0.05
E1	1.75 ± 0.10
T	0.25 ± 0.1

Leader min.	390
Trailer min.	160


Reel Dimensions

A	178 ± 1
N	59 ± 1
W1	$8.5 \pm 1.0/-0.2$
W2	12.0 ± 1

EIA Tape Component Dimensions

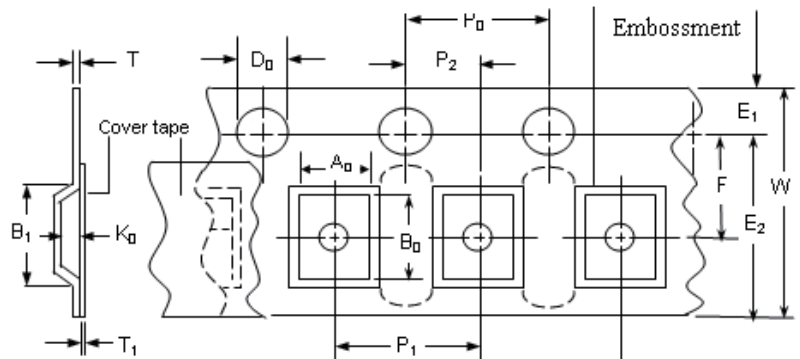

EIA Reel Dimensions

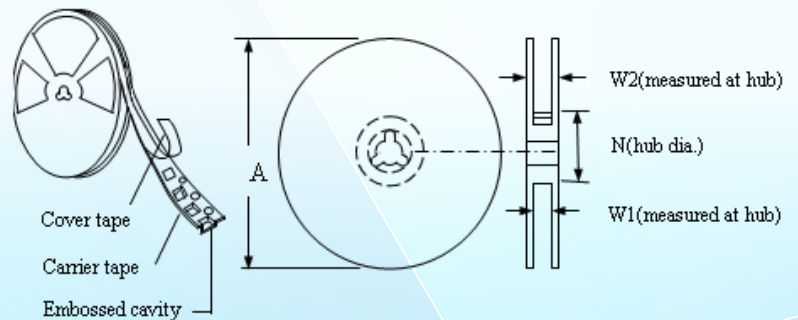


Packaging Quantity

Model	Quantity
ASMD1210SL150~500	4,000 pcs/reel
ASMD1210SL540~750	3,000 pcs/reel

Part Number System

ASMD 1210 SL -

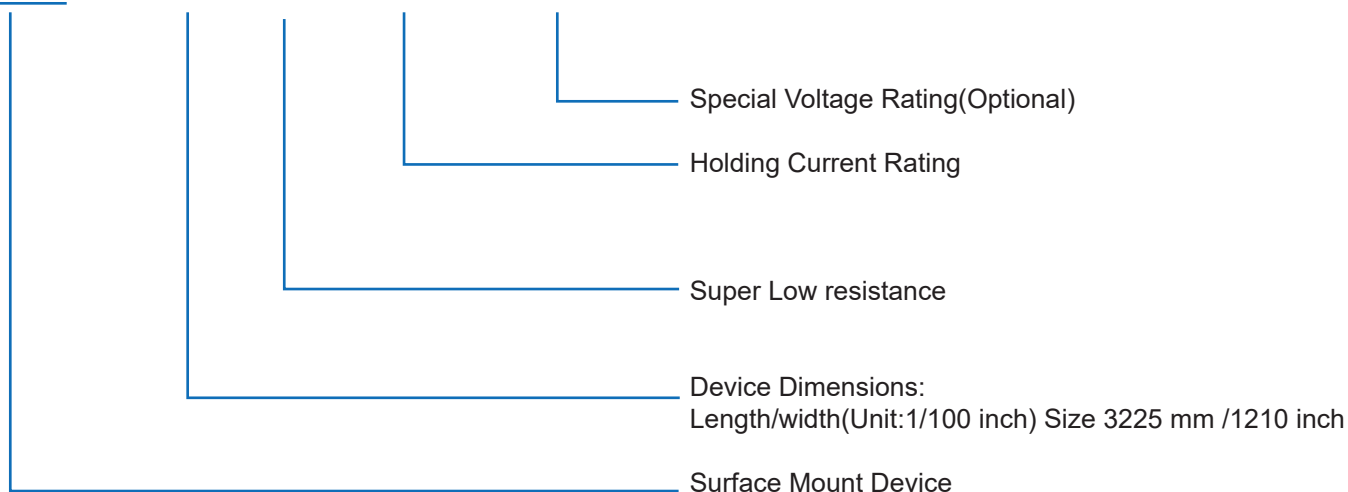

Application Notice

1. Operation of these PPTC devices beyond the stated maximum ratings could result in damage to the devices and lead to electrical arcing and/or fire;

PPTC 器件在超过规定的最大值额定值运行可能会导致器件损坏以及导致电弧和/或火灾。

2. These PPTC devices are intended to protect against the effects of temporary over-current or over-temperature conditions and shall not be taken for use as switch.

PPTC 的作用是防止临时的过流或过温造成的不良影响，不能当作开关使用。

3. Exposure to lubricants, silicon-based oils, solvents, gels, electrolytes, acids, and other related or similar materials may adversely affect the performance of PPTC devices.

PPTC 接触润滑剂、硅基油、溶剂、凝胶、电解质、酸和其他相关或类似材料可能会对 PPTC 器件的性能有不利影响。

4. Circuits with inductance may generate a voltage above the rated voltage of the PPTC device and should be thoroughly evaluated within the user's application during the PPTC selection and qualification process.

带有电感的电路可能产生高于 PPTC 额定电压的电压，因此客户在选型和认定过程中应进行彻底的评估。

5. Please do not smash, clamp, pull, dent or twist by tool during assembling process, as they may result in the PPTC damage.

在装配过程中，避免有砸、挤、拉、扭等方式外力作用于 PPTC 本体上，因为它们可能导致 PPTC 损坏。

6. Hand-soldering of PPTC devices on boards is generally not recommended. Users shall define and verify this process if needed.

不推荐使用手工焊接的方式焊接 PPTC。如果需要，用户需要定义和验证此过程。

7. Recommended storage conditions should be followed at all times, The MSL classification of PPTC is grade 2a.

必须始终遵守推荐的保存条件要求，PPTC 的 MSL 等级为 2 a 级。