


Features

- 20V/6A,
 $R_{DS(ON)} = 10m\Omega(Typ.)@V_{GS}=4.5V$
 $R_{DS(ON)} = 15m\Omega(Typ.)@V_{GS}=2.5V$
- Low $R_{DS(ON)}$
- Super High Dense Cell Design
- Reliable and Rugged
- Lead Free and Green Devices Available (RoHS Compliant)

Applications

- Power Management

Pin Description

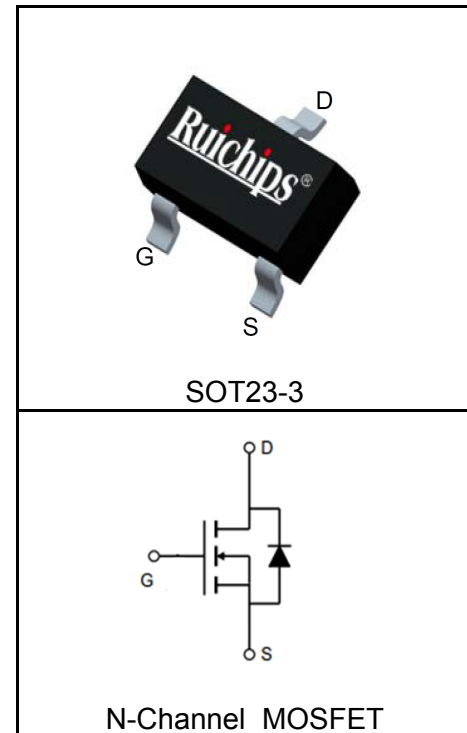

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
Common Ratings ($T_A = 25^\circ\text{C}$ Unless Otherwise Noted)			
V_{DSS}	Drain-Source Voltage	20	V
V_{GSS}	Gate-Source Voltage	± 12	
T_J	Maximum Junction Temperature	150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
I_S	Diode Continuous Forward Current	$T_A = 25^\circ\text{C}$ 1.7	A
Mounted on Large Heat Sink			
$I_{DP}^{(1)}$	300 μs Pulse Drain Current Tested	$T_A = 25^\circ\text{C}$ 24	A
$I_D^{(2)}$	Continuous Drain Current($V_{GS}=4.5V$)	$T_A = 25^\circ\text{C}$ 6	A
		$T_A = 70^\circ\text{C}$ 4.5	
P_D	Maximum Power Dissipation	$T_A = 25^\circ\text{C}$ 1.25	W
		$T_A = 70^\circ\text{C}$ 0.75	
$R_{\theta JC}$	Thermal Resistance-Junction to Case	-	$^\circ\text{C/W}$
$R_{\theta JA}^{(3)}$	Thermal Resistance-Junction to Ambient	100	$^\circ\text{C/W}$
Drain-Source Avalanche Ratings			
$E_{AS}^{(4)}$	Avalanche Energy, Single Pulsed	TBD	mJ

Electrical Characteristics ($T_A=25^{\circ}\text{C}$ Unless Otherwise Noted)

Symbol	Parameter	Test Condition	RU207C			Unit
			Min.	Typ.	Max.	
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250μA	20			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =20V, V _{GS} =0V			1	μA
		T _J =125°C			30	
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250μA	0.5	0.7	1.1	V
I _{GSS}	Gate Leakage Current	V _{GS} =±10V, V _{DS} =0V			±100	nA
R _{DS(ON)} ⑤	Drain-Source On-state Resistance	V _{GS} =4.5V, I _{DS} =6A		10	13	mΩ
		V _{GS} =2.5V, I _{DS} =5A		15	18	mΩ
Diode Characteristics						
V _{SD} ⑤	Diode Forward Voltage	I _{SD} =1A, V _{GS} =0V			1	V
t _{rr}	Reverse Recovery Time	I _{SD} =1A, dI _{SD} /dt=100A/μs		15		ns
Q _{rr}	Reverse Recovery Charge			8		nC
Dynamic Characteristics ⑥						
R _G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, F=1MHz		1.5		Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =10V, Frequency=1.0MHz		590		pF
C _{oss}	Output Capacitance			125		
C _{rss}	Reverse Transfer Capacitance			90		
t _{d(ON)}	Turn-on Delay Time	V _{DD} =10V, I _{DS} =6A, V _{GEN} =4.5V, R _G =6Ω		8		ns
t _r	Turn-on Rise Time			15		
t _{d(OFF)}	Turn-off Delay Time			33		
t _f	Turn-off Fall Time			13		
Gate Charge Characteristics ⑥						
Q _g	Total Gate Charge	V _{DS} =16V, V _{GS} =4.5V, I _{DS} =6A		10		nC
Q _{gs}	Gate-Source Charge			1.6		
Q _{gd}	Gate-Drain Charge			3.4		

- Notes:
- ① Pulse width limited by safe operating area.
 - ② Calculated continuous current based on maximum allowable junction temperature.
 - ③ When mounted on 1 inch square copper board, $t \leq 10\text{sec}$. The value in any given application depends on the user's specific board design.
 - ④ Limited by T_{Jmax} . Starting $T_J = 25^{\circ}\text{C}$.
 - ⑤ Pulse test; Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
 - ⑥ Guaranteed by design, not subject to production testing.

Ordering and Marking Information

Device	Marking ^①	Package	Packaging	Quantity	Reel Size	Tape width
RU207C	RXYWW	SOT23-3	Tape&Reel	3000	7"	8mm






① The following characters could be different and means:

X =Assembly site code







Y =Year

WW =Work Week



Typical Characteristics

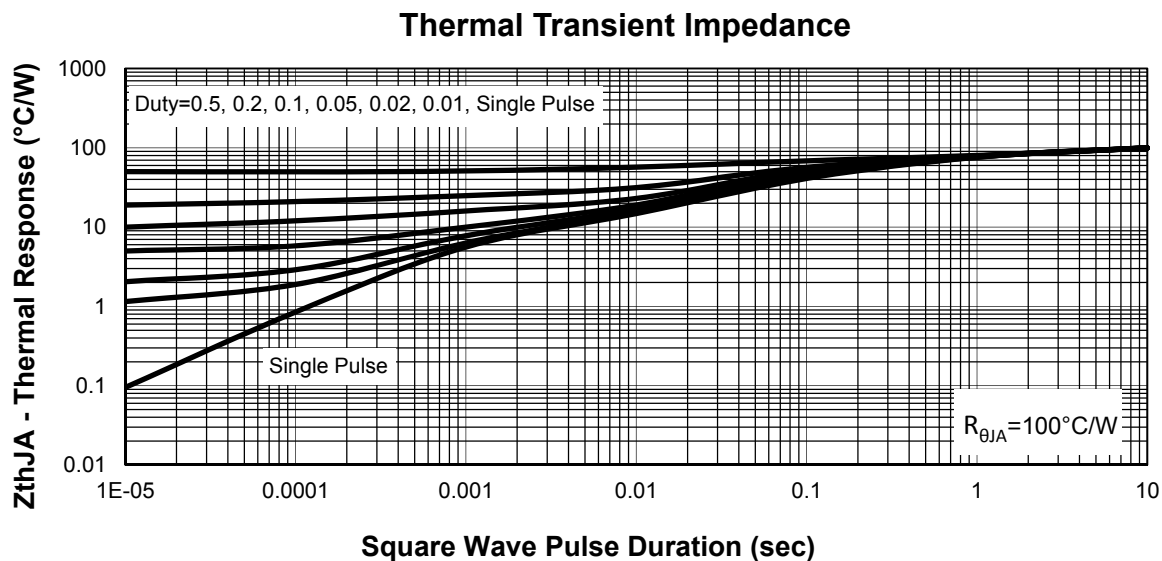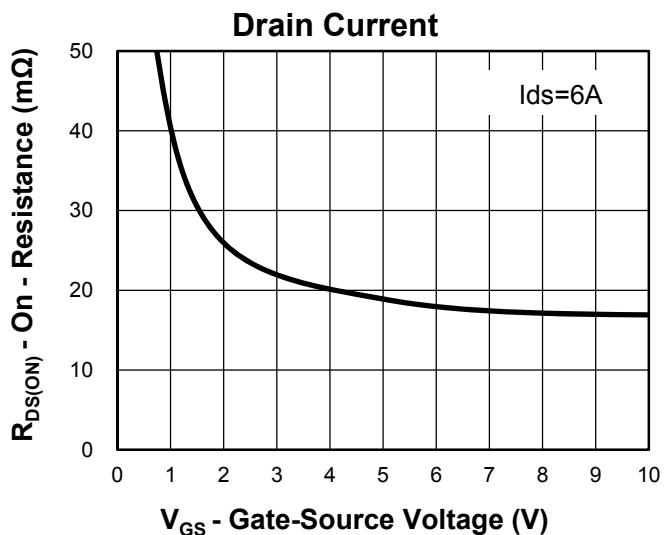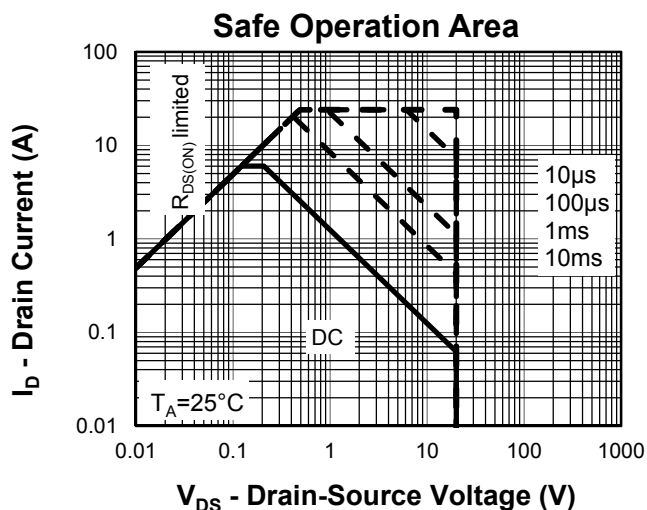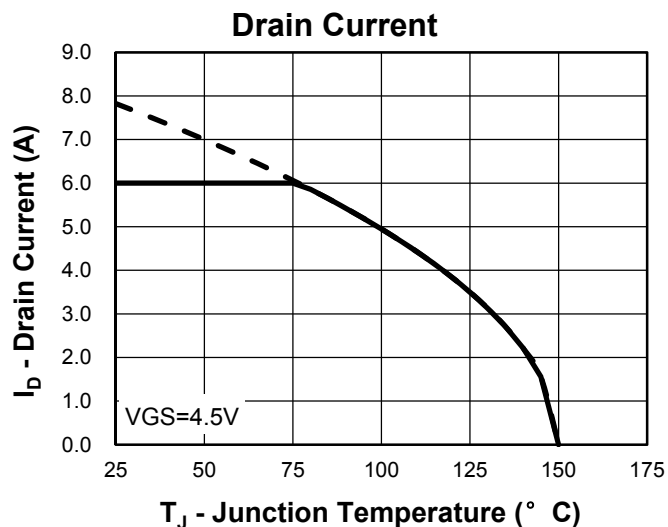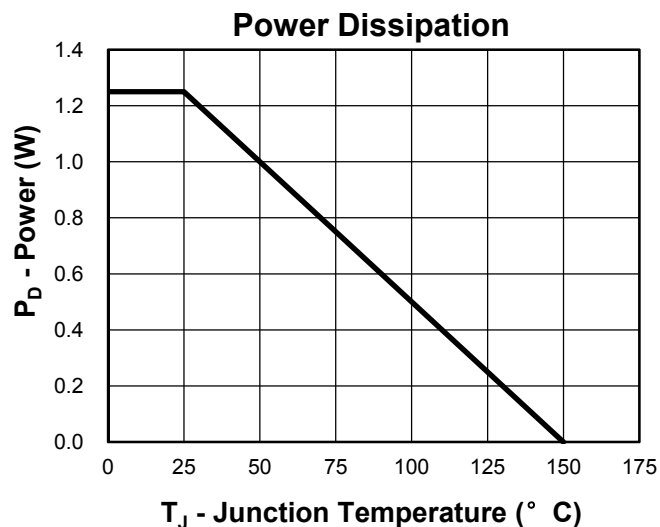



Typical Characteristics

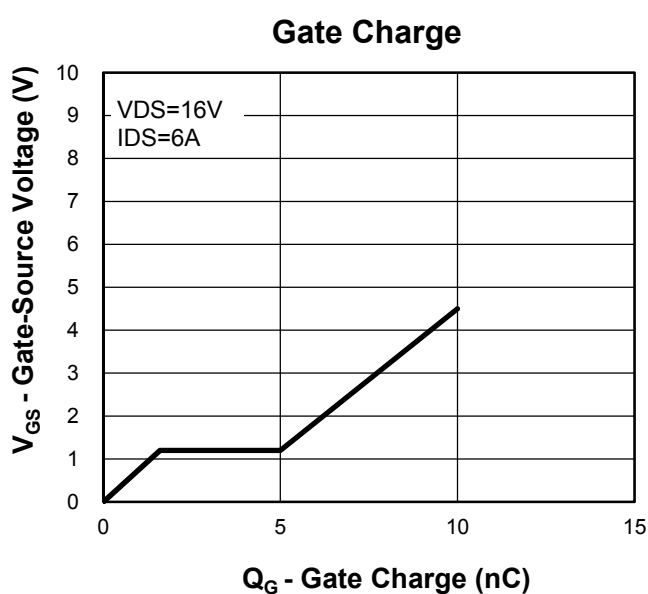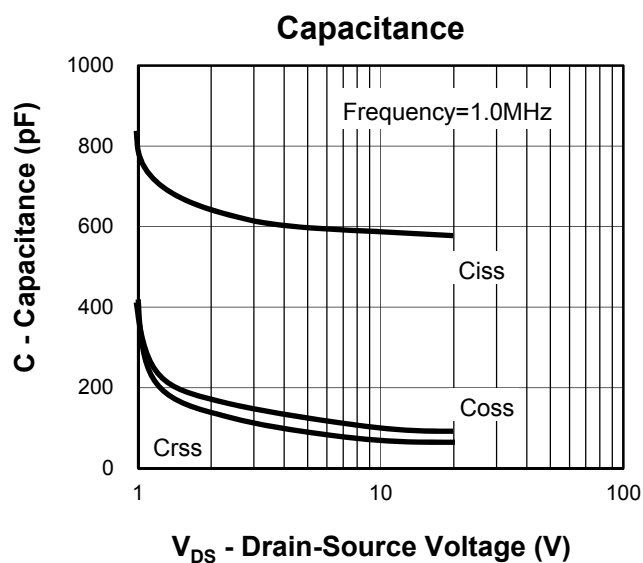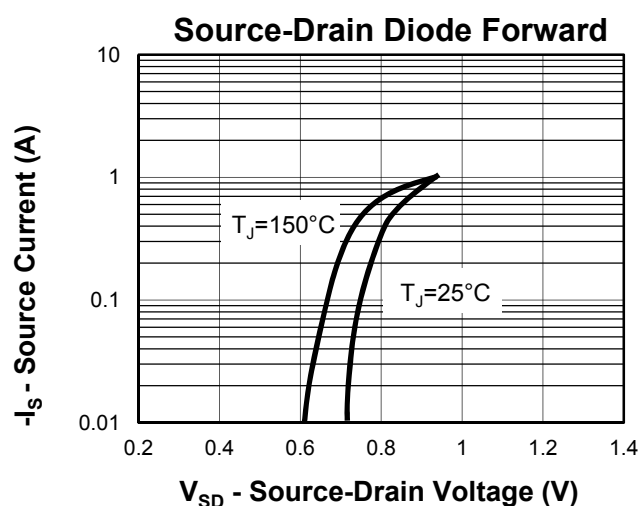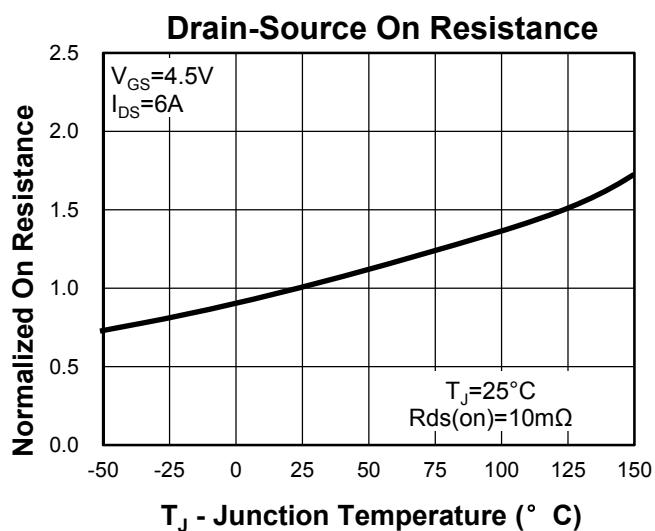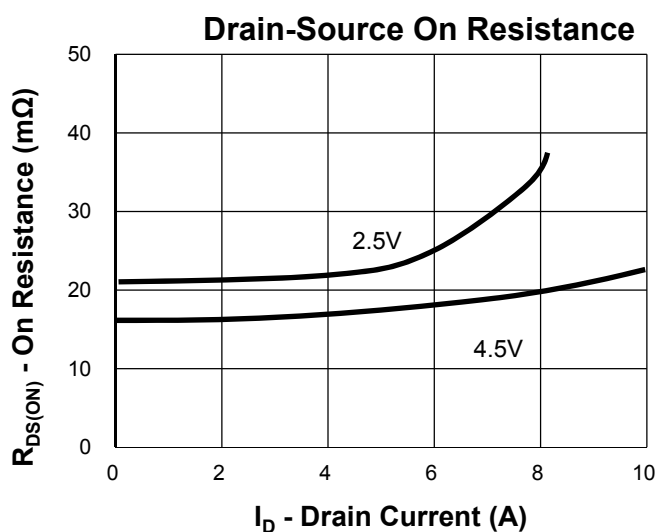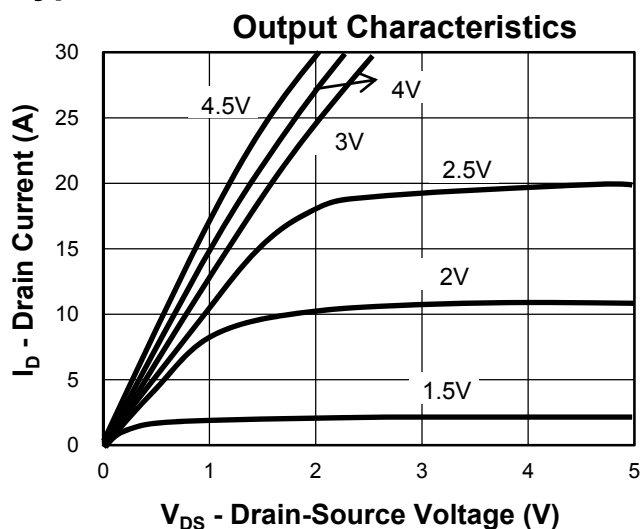

Avalanche Test Circuit and Waveforms

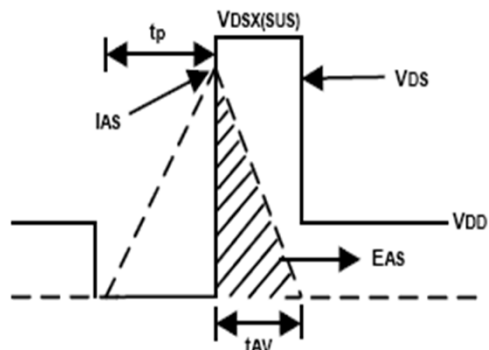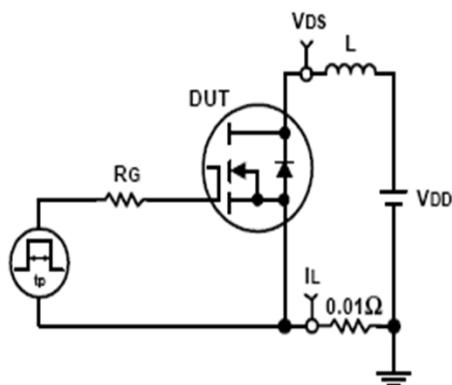


Switching Time Test Circuit and Waveforms

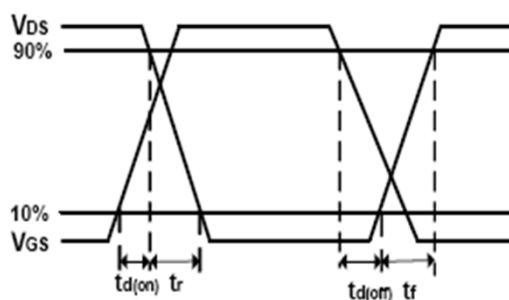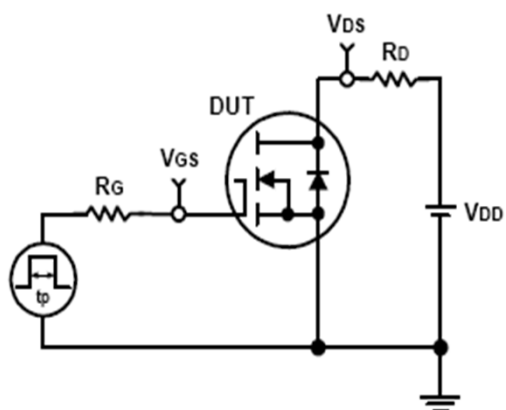

Package Information

SOT23-3

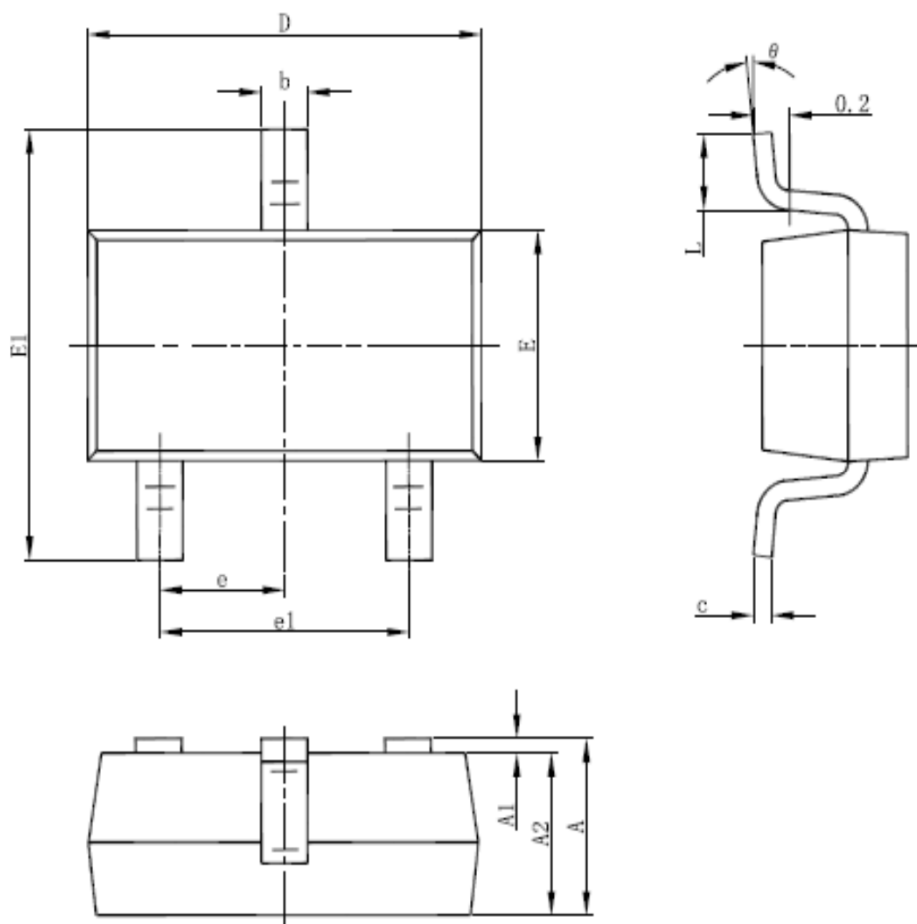

SYMBOL	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.950	1.150	1.450	0.037	0.045	0.057
A1	0.000	*	0.150	0.000	*	0.006
A2	0.900	1.100	1.300	0.035	0.043	0.051
b	0.300	0.400	0.500	0.012	0.016	0.020
c	0.080	0.150	0.200	0.003	0.006	0.008
D	2.800	2.925	3.050	0.110	0.115	0.120
E	1.500	1.600	1.750	0.059	0.063	0.069
E1	2.650	2.800	3.000	0.104	0.110	0.118
e	0.950 BSC			0.037 BSC		
e1	1.800	1.900	2.000	0.071	0.075	0.079
L	0.300	0.450	0.600	0.012	0.018	0.024
θ	0°	4°	8°	0°	4°	8°

Customer Service

Worldwide Sales and Service:

Sales@ruichips.com

Technical Support:

Technical@ruichips.com

Investor Relations Contacts:

Investor@ruichips.com

Marcom Contact:

Marcom@ruichips.com

Editorial Contact:

Editorial@ruichips.comm

HR Contact:

HR@ruichips.com

Legal Contact:

Legal@ruichips.com

Shen Zhen RUICHIPS Semiconductor CO., LTD

4th Floor, Block 8, Changyuan New Material Port, Keyuan Middle Road, Science & Industry Park,
Nanshan District, Shenzhen, CHINA

TEL: (86-755) 8311-5334

FAX: (86-755) 8311-4278

E-mail: Sales-SZ@ruichips.com