



REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

- a.HOUSING:NYLON BLACK
b.CONTACT:STAINLESS STEEL
(SURFACE PLATING: Au-PLATING)

SEE ORDERING INFORMATION

2.ELECTRIC:

- a.DIELECTRIC VOLTAGE: 500V AC ONE MINUTE
b.OPERATING TEMPERATURE: -10°C~ +80°C

ORDERING INFORMATION

BH-AAA-B5BA021

电池盒

电池型号

SMT 180° TYPE

PLATING:

- A-Au-PLATING
J-Ni-PLATING
K-Sn-PLATING



MATERIAL:

- 1A-PBT BLACK
1B-PA66 BLACK
2A-PPA BROWN
2B-PPA BLACK
3A-PPS BROWN
3B-PPS BLACK
4A-LCP WHITE
4B-LCP BLACK
5A-PA9T BLACK
5B-NYLON BLACK


工程部

2022-11-12

H. WANG

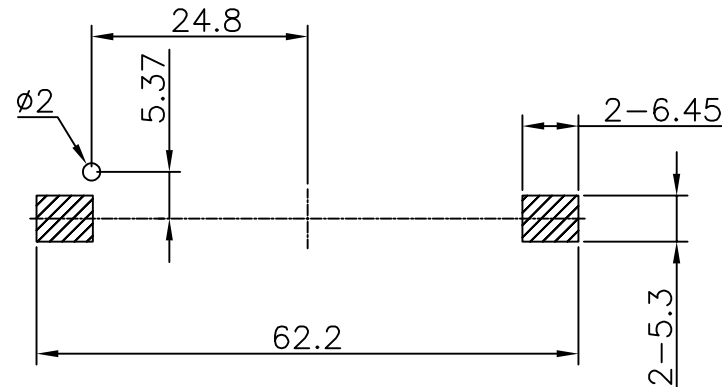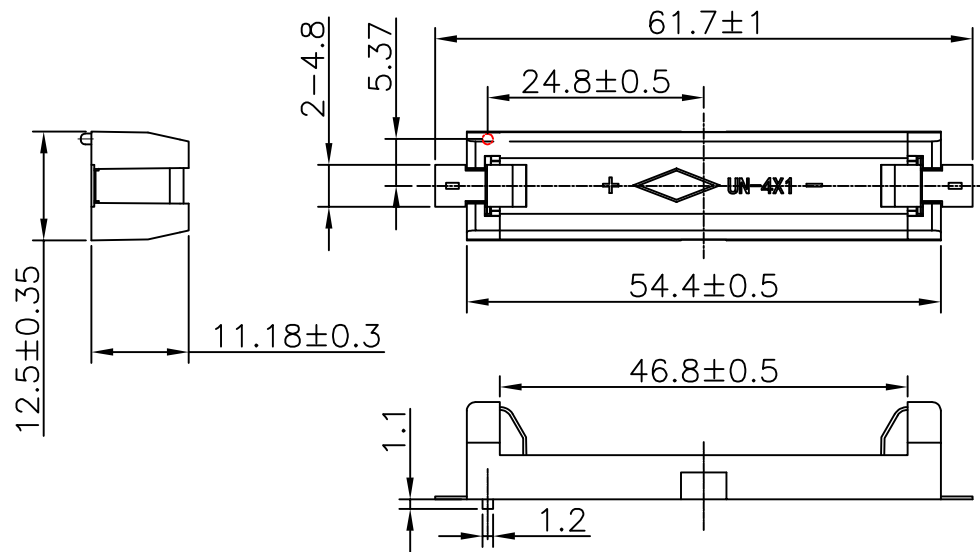

PCB Layout Diagram
TOP View

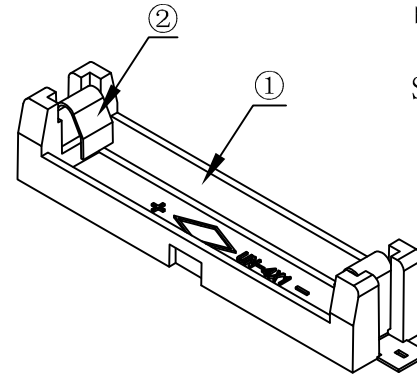

UNLESS OTHERWISE SPECIFIED TOLERANCES		MYOUNG 美用 www.meiyangdz.com			
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10	ANGLES: X :±1° X.X :±0.5°	DSND	WangHeng	DATE	2022-11-12
WEIGHT:		CHKD	ZhouRuicai	DATE	2022-11-12
		APVD	XueShunyong	DATE	2022-11-12
SHEET 1 OF 1		SCALE:	SIZE: A4	VIEW:	⊙ ⊞
		UNIT: mm	REV.: A/0	OBJECT: MY	

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
2	TERMINAL	2	STAINLESS STEEL, T=0.3mm	Au-Plating
1	HOUSING	1	NYLON	BLACK

TITLE:	电池盒BH-AAA-1J Au SMT
PART NO.:	BH-AAA-B5BA021
DRAW NO.:	MY-CP-0165