

SPTECH Silicon NPN Power Transistor

2SC4706

DESCRIPTION



- High Collector-Emitter Breakdown Voltage-
: $V_{(BR)CEO} = 600V(\text{Min})$
- High Switching Speed
- High Reliability

APPLICATIONS

- Designed for switching regulator and general purpose applications.

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	900	V
V_{CEO}	Collector-Emitter Voltage	600	V
V_{EBO}	Emitter-Base voltage	7	V
I_C	Collector Current-Continuous	14	A
I_{CM}	Collector Current-Peak	28	A
I_B	Base Current-Continuous	7	A
P_C	Collector Power Dissipation @ $T_C = 25^\circ\text{C}$	130	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

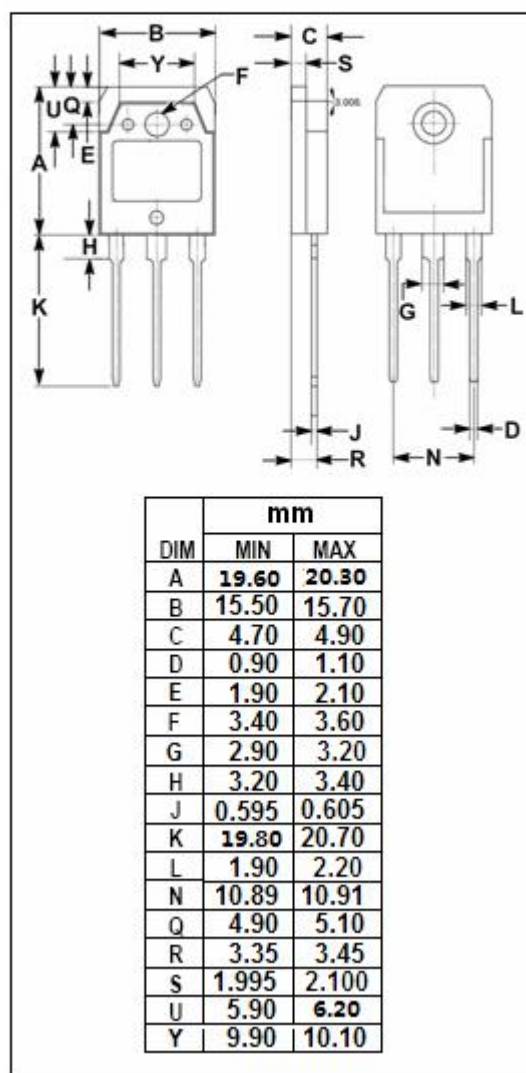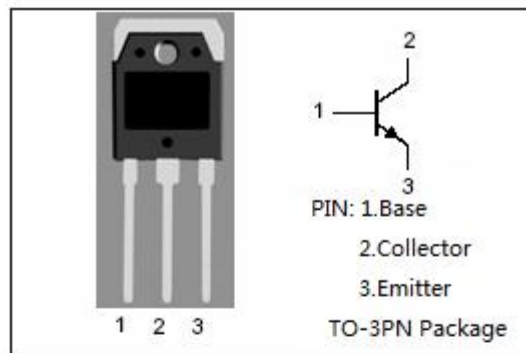

SPTECH Silicon NPN Power Transistor

2SC4706

ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=10\text{mA}$; $I_B=0$	600			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=7\text{A}$; $I_B=1.4\text{A}$			0.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=7\text{A}$; $I_B=1.4\text{A}$			1.2	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=800\text{V}$; $I_E=0$			0.1	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB}=7\text{V}$; $I_C=0$			0.1	mA
h_{FE}	DC Current Gain	$I_C=7\text{A}$; $V_{CE}=4\text{V}$	10		25	
C_{OB}	Output Capacitance	$I_E=0$; $V_{CB}=10\text{V}$; $f_{test}=1.0\text{MHz}$		160		pF
f_T	Current-Gain—Bandwidth Product	$I_E=-1.5\text{A}$; $V_{CE}=12\text{V}$		6		MHz

Switching Times

t_{on}	Turn-on Time	$I_C=7\text{A}$, $I_{B1}=1.05\text{A}$; $I_{B2}=-3.5\text{A}$ $R_L=35.7\ \Omega$; $V_{CC}=250\text{V}$			1.0	μs
t_{stg}	Storage Time				5.0	μs
t_f	Fall Time				0.7	μs