


Applications

- Power amplifier
- Switching circuits

Features

- Low collector-emitter saturation voltage
- Fast switching speed



Absolute Maximum Rating ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Parameter		Symbol	Value	Unit
Collector-base voltage		BV_{CBO}	100	V
Collector-emitter voltage		BV_{CEO}	80	V
Emitter-base voltage		BV_{EBO}	5	V
Collector current (DC)		I_C	8	A
Collector current Pulse		I_{CP}	16	A
Collector power dissipation	$T_a=25^{\circ}\text{C}$	P_C	1.75	W
	$T_C=25^{\circ}\text{C}$		20	
Junction temperature		T_j	150	$^{\circ}\text{C}$
Storage temperature		T_{stg}	-65~150	$^{\circ}\text{C}$

Electrical Characteristics ($T_C=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	BV_{CBO}	$I_C = 100\mu\text{A}, I_E = 0$	100			V
Collector-emitter breakdown voltage	BV_{CEO}	$I_C = 10\text{mA}, I_B = 0$	80			V
Emitter-base breakdown voltage	BV_{EBO}	$I_E = 100\mu\text{A}, I_C = 0$	5			V
Collector cut-off current	I_{CBO}	$V_{CB} = 80\text{V}, V_{BE} = 0$			10	μA
Emitter cut-off current	I_{EBO}	$V_{EB} = 5\text{V}, I_C = 0$			50	μA
DC current gain *	h_{FE}	$V_{CE} = 1\text{V}, I_C = 2\text{A}$ $V_{CE} = 1\text{V}, I_C = 4\text{A}$	60 40			
Collector-emitter saturation voltage*	$V_{CE(sat)}$	$I_C = 8\text{A}, I_B = 0.4\text{A}$			1	V
Base-emitter saturation voltage*	$V_{BE(sat)}$	$I_C = 8\text{A}, I_B = 0.8\text{A}$			1.5	V
Transition frequency	f_T	$V_{CE} = 10\text{V}, I_B = 0.5\text{A}$		50		MHz
Output Capacitance	C_{ob}	$V_{CB} = 10\text{V}, I_E = 0, f = 1\text{MHz}$		130		pF

* Pulse Test: $PW \leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$

Typical Characteristics

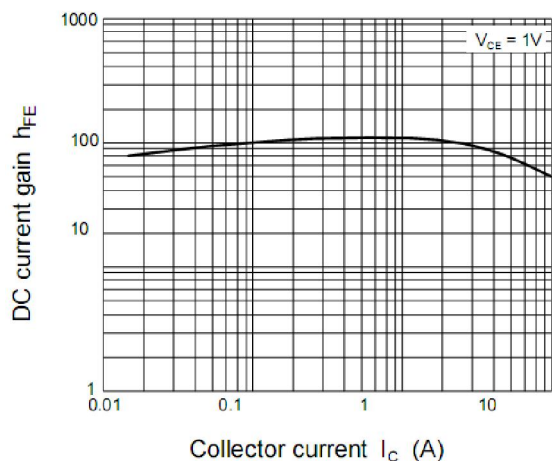


Figure 1. DC current Gain

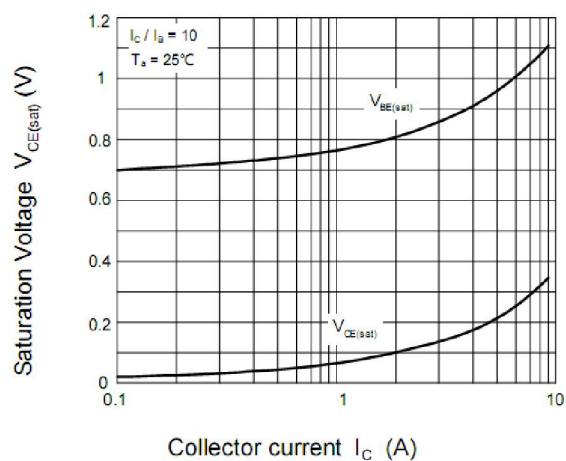


Figure 2 . Saturation Voltage

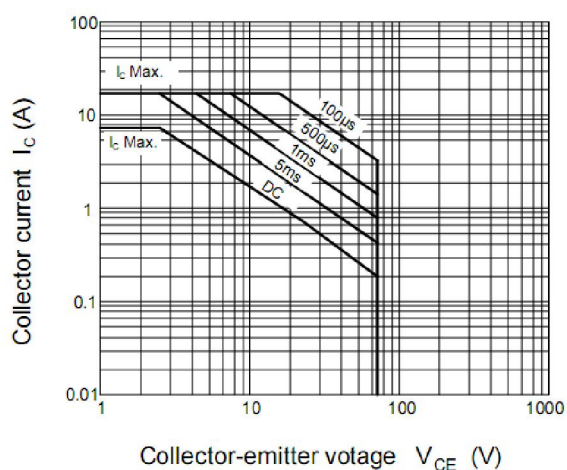


Figure 3. Safe Operating Area

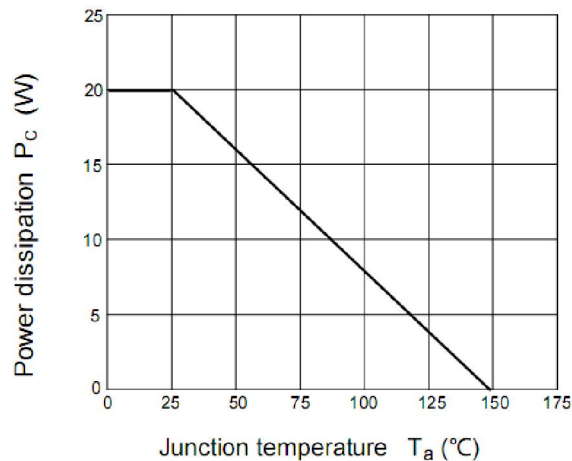


Figure 4. Power Derating

Package Dimensions

Dim	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	2.20	2.50	0.087	0.098
A1	0.00	0.12	0.000	0.005
A2	2.20	2.40	0.087	0.094
B	1.20	1.60	0.047	0.063
b	0.50	0.70	0.020	0.028
b1	0.70	0.90	0.028	0.035
c	0.40	0.60	0.016	0.024
c1	0.40	0.60	0.016	0.024
D	6.35	6.65	0.250	0.262
D1	5.20	5.40	0.205	0.213
E	5.40	5.70	0.213	0.224
e	2.20	2.40	0.087	0.094
e1	4.40	4.80	0.173	0.189
L	9.60	10.20	0.378	0.402
L1	2.70	3.10	0.106	0.122
L2	1.40	1.80	0.055	0.071
L3	0.90	1.50	0.035	0.059

NOTICE

The information presented in this document is for reference only. Involving product optimization and productivity improvement, ChipNobo reserves the right to adjust product indicators and upgrade some technical parameters. ChipNobo is entitled to be exempted from liability for any delay or non-delivery of the information disclosure process that occurs.

本文件中提供的信息仅供参考。涉及产品优化和生产效率改善，ChipNobo 有权调整产品指标和部分技术参数的升级，所出现信息披露过程存在延后或者不能送达的情形，ChipNobo 有获免责权。

The product listed herein is designed to be used with residential and commercial equipment, and do not support sensitive items and specialized equipment in areas where sanctions do exist. ChipNobo Co., Ltd or anyone on its behalf, assumes no responsibility or liability for any damages resulting from improper use.

此处列出的产品旨在民用和商业设备上使用，不支持确有制裁地区的敏感项目和特殊设备，ChipNobo 有限公司或其代表，对因不当使用而造成的任何损害不承担任何责任。

For additional information, please visit our website <http://www.chipnobo.com>, or consult your nearest Chipnobo sales office for further assistance.

欲了解更多信息，请访问我们的网站 <http://www.chipnobo.com>，或咨询离您最近的 Chipnobo 销售办事处以获得进一步帮助。