
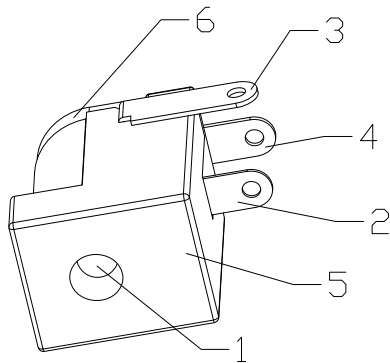
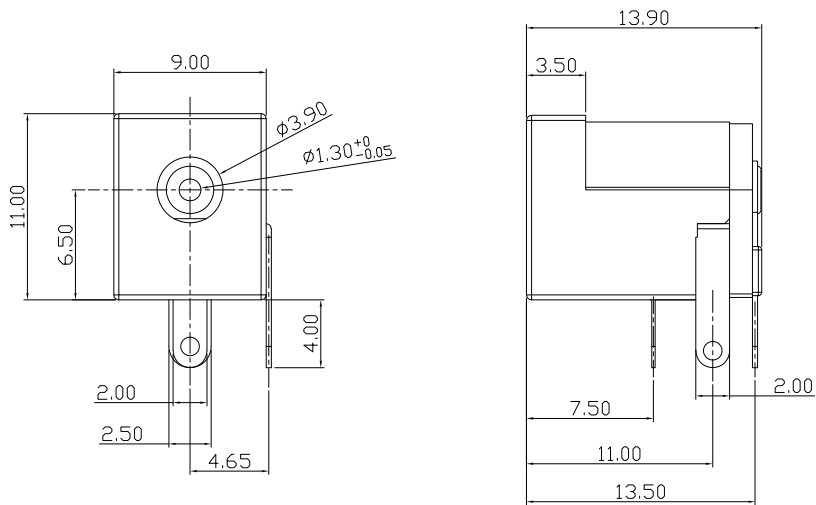


推荐插头尺寸

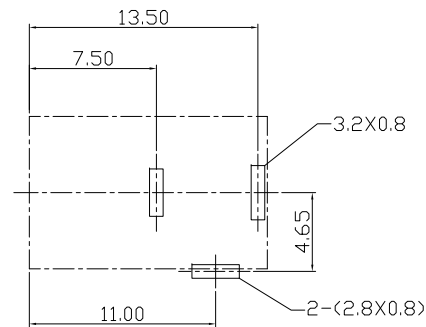

P.C.B 设计参考尺寸

NOTES:

1. VOLTAGE RATING: 30V DC ;
2. CURRENT RATING: 0.5A ;
3. CONTACT RESISTANCE: $\leq 30m\Omega$;
4. INSULATION RESISTANCE: $\geq 100M\Omega$;
5. WITHSTAND VOLTAGE: 500 VAC ;
6. UNMATING FORCE: 3N~30N ;
7. OPERATING LIFE: 5000 CYCLES MIN ;
8. OPERATION TEMPERATURE: $-20^{\circ}C \sim +80^{\circ}C$;



Ordering Information

HC- DC*** - * - * ** - * - ** - ** - 08

序列号	Nature	Foot	Type	T=Through holes	PIN Diameter	Material
M=Male	F=Female	2=2P	DP=DP (DIP)	1.3~1.3mm	HT=HT	
		3=3P	SM=SM (SMT)	1.65~1.65mm	2.0~2.0mm	
		4=4P	VS=Vertical SMT (V-SMT)	2.0~2.0mm	2.0~2.0mm	
			MS=Mid Mount (MS)	2.0~2.0mm	2.0~2.0mm	
			DS=DS (DS)	2.0~2.0mm	2.0~2.0mm	
			WB=Wire Bonding (WB)	2.0~2.0mm	2.0~2.0mm	

6	后盖	PBT	1	黑色
5	主体	PBT	1	黑色
4	平片	黄铜 T=0.3mm	1	镀铜锡
3	弯片	黄铜 T=0.3mm	1	镀铜锡
2	弹片	锰钢 T=0.2mm	1	镀铜锡
1	PIN针	黄铜	1	镀铜锡
序号	名称	材料	数量	颜色/电镀

			GENERAL TOLERANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD				
			DIM TOL	审 核 CHECK					
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	电源插座 母座 3P 卧插 01.3 半铜	版 本 REV.	A	
1	初版发行		X.XX ±0.20		产品料号 PART NO.	HC-DC005C-F-3DIP-1.3-M-08	单 位 UNITS	mm	
			X.XXX ±0.10	比 例 SCALE					
序号 No.	变更内容 MODIFY CONTENT	日期 MODIFY DATE	Angle ±3.0°	投 影 Projection		材 料 MATERIAL	页 次 SHEET	1/1	