

TDSEMIC

拓電半導體

自主封測 品質把控 售後保障

WEB | WWW.TDSEMIC.COM



電源管理



顯示驅動



二三極管



LDO穩壓器



觸摸芯片



MOS管



運算放大器



存儲芯片



MCU



串口通信

GBP210-TD

產品規格說明書

GBP206 THRU GBP210 SINGLE PHASE 2.0 AMP BRIDGE RECTIFIERS

FEATURES


- * Ideal for printed circuit board
- * Low forward voltage
- * Low leakage current
- * Polarity: marked on body
- * Mounting position: Any
- * Weight: 4.8 grams

VOLTAGE RANGE

600 to 1000 Volts

CURRENT

2.0 Ampere

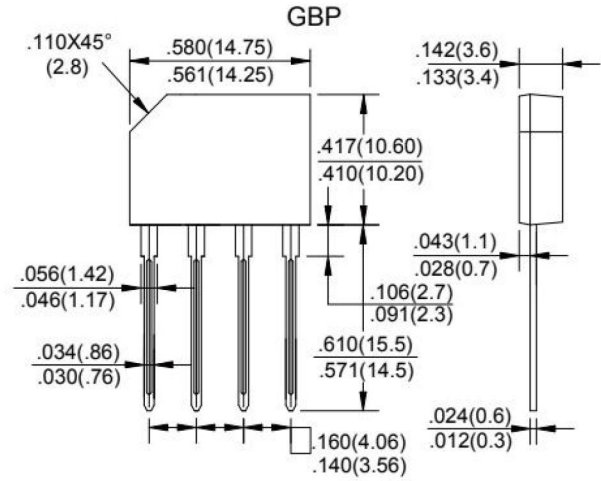

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25 °C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

	Symbols	GBP206	GBP208	GBP210	Units
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	600	800	1000	Volts
Maximum RMS Voltage	V _{RMS}	420	560	700	Volts
Maximum DC Blocking Voltage	V _{DC}	600	800	1000	Volts
Maximum Average Forward Rectified Current. 375"(9.5mm) Lead Length at T _A =50 °C	I _(AV)	2.0			Amp
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	50			Amp
Maximum Forward Voltage at 2.0A DC and 25°C	V _F	1.1			Volts
Maximum Reverse Current at T _A =25°C at Rated DC Blocking Voltage T _A =100°C	I _R	5.0 500			uAmp
Typical Junction Capacitance (Note 1)	C _J	25			pF
Typical Thermal Resistance (Note 2)	R _{θJA}	30			°C/W
Typical Thermal Resistance (Note 2)	R _{θJL}	16			°C/W
Operating and Storage Temperature Range	T _J , T _{stg}	-55 to +150			°C

NOTES:

- 1- Measured at 1 MHz and applied reverse voltage of 4.0 VDC.
- 2- Thermal Resistance Junction to Ambient and from junction to lead at 0.375" (9.5mm) lead length P.C.B. Mounted.

GBP206 THRU GBP210 SINGLE PHASE 2.0 AMP BRIDGE RECTIFIERS

RATING AND CHARACTERISTIC CURVES (GBP206 THRU GBP210)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

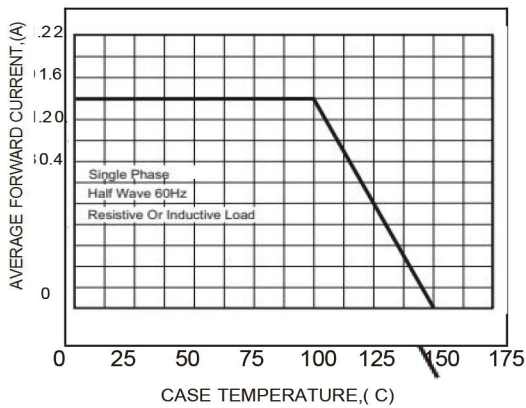


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

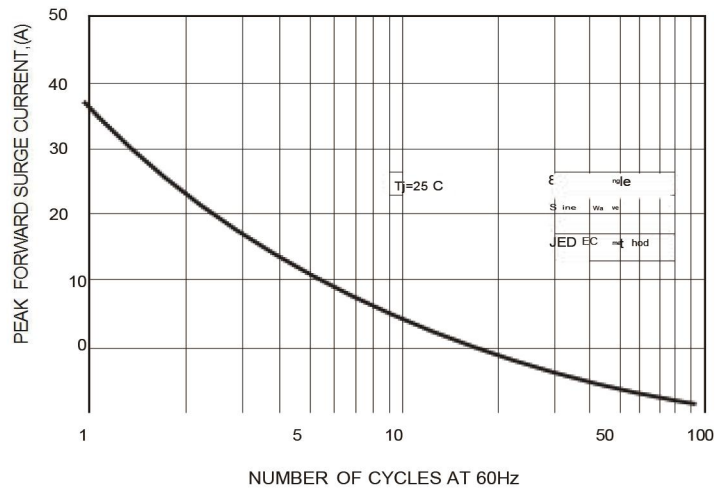


FIG.3-TYPICAL FORWARD CHARACTERISTICS

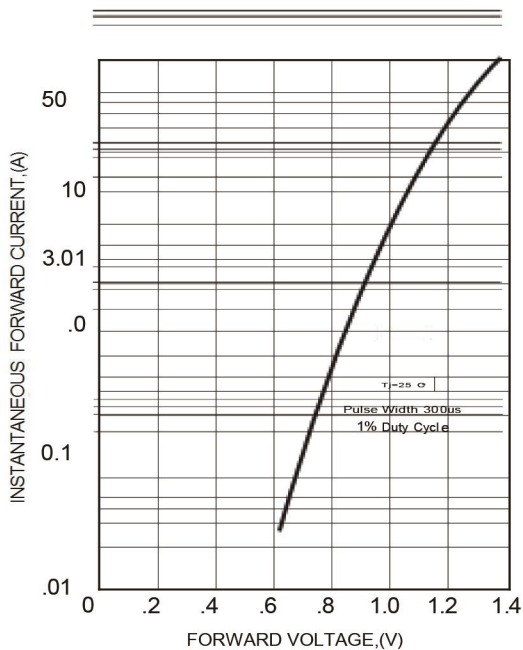


FIG.4-TYPICAL REVERSE CHARACTERISTICS

