
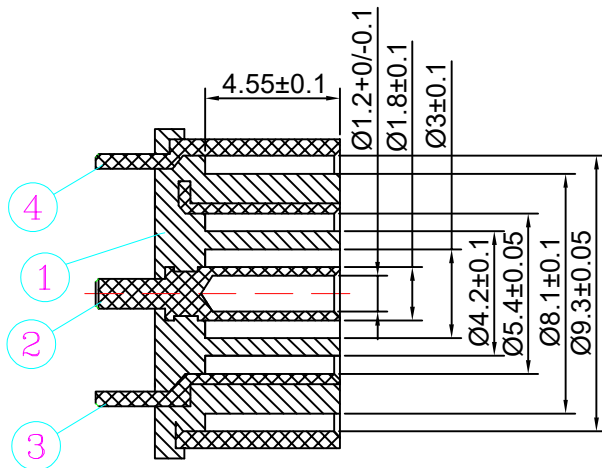
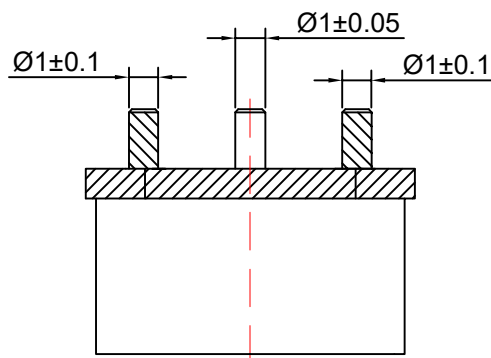
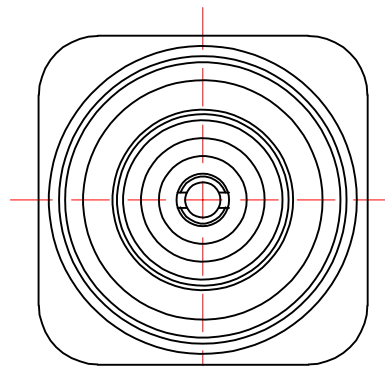
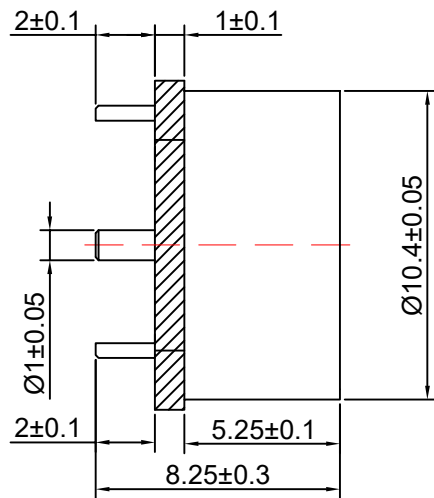


RoHS

REV.	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	新版发行	Chen HongJiang	Chen ZhiQiang	2025.05.08

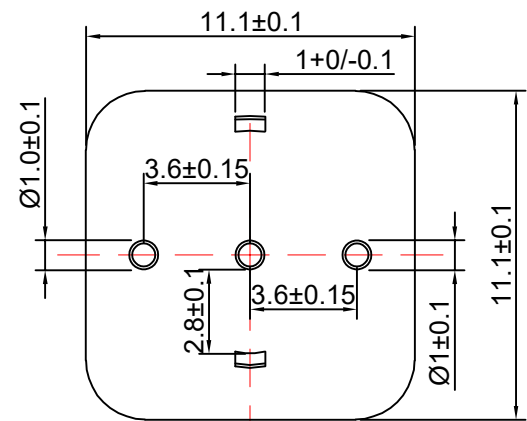

Technology Request;
1.Outlook;No burr,no hurt.
2.Electronic performance;
a.Insulation resistance;Above DC500V/100MΩ;
b.Endur voiage;AC500V at 1 minute
c.Contact resistance;Under 30mΩ
3.Insertion force & withdrawal force;0.3-3kgf
4.Salt spray test;24H
5.Meet RoHS.
6.Remark * is important specification

4	10.4*8.25*9.4外管	C3604	Ni 40-120u
3	6.18.25*5.7管	C3604	Ni 40-120u
2	8*8.25*1.3针	C3604	Ni 40-120u
1	PLASTIC	PBT	Black
NO	PART	MATERIAL	PLATING

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO: XF-10412825-3-F		XFCN 兴飞连接器		
TITLE: 10.4*1.2*8.25 插板式三级母座		0769-82001899		
		www.xfconn.com		
		DWG NO:		
APPD	Chen ZhiQiang			
CHKD	Liu Wei	VIEW		
DRAW	Chen HongJiang	SCALE	SHEET	REV
DATE	2025.05.08	NONE	1/1	A1