
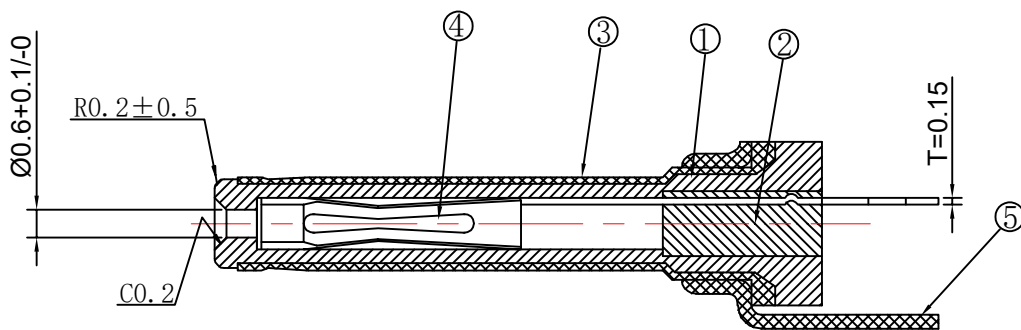



RoHS

REV.	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	新版发行	Chen HongJiang	Chen ZhiQiang	2025.05.08

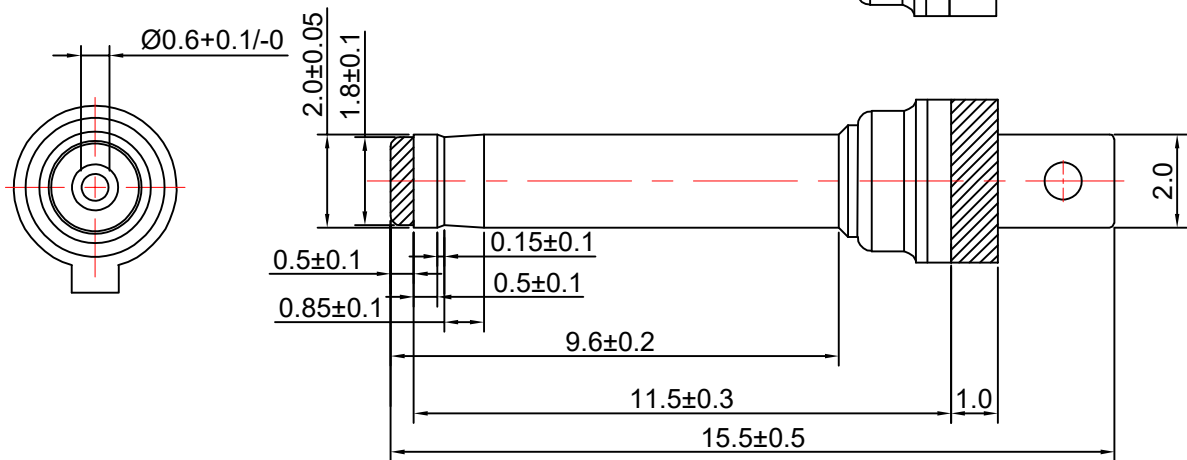

Technology Request;
1.Outlook;No burr,no hurt.
2.Electronic performance;
a.Insulation resistance;Above DC500V/100MΩ;
b.Endur voiage;AC500V at 1 minute
c.Contact resistance;Under 30mΩ
3.Insertion force & withdrawal force;0.3-3kgf
4.Salt spray test;24H
5.Meet RoHS.
6.Remark * is important specification

5	焊片	IRON	Sn 2-5um
4	2006-15.5端子	C5191	Ni 2-5um
3	音叉管	C3604	Ni 2-5um
2	PLASTIC	POM	Black
1	PLASTIC	PA66	Black
NO	PART	MATERIAL	PLATING

X.±0.50	X.°±
.X±0.25	.X°±
.XX±0.15	.XX°±
.XXX±0.10	.XXX°±
UNITS:	mm

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN

PART NO:		XF-2006TVL155-180		XFCN 兴飞连接器	
TITLE:		DC PLUG Ø2.0*0.6-15.5L 带片 180°		0769-82001899	
UNITS:		mm		www.xfconn.com	
APPD		Chen ZhiQiang		DWG NO:	
CHKD		Liu Wei		VIEW	⊕
DRAW		Chen HongJiang		SCALE	SHEET
DATE		2025.05.08		NONE	REV
				1/1	A1