
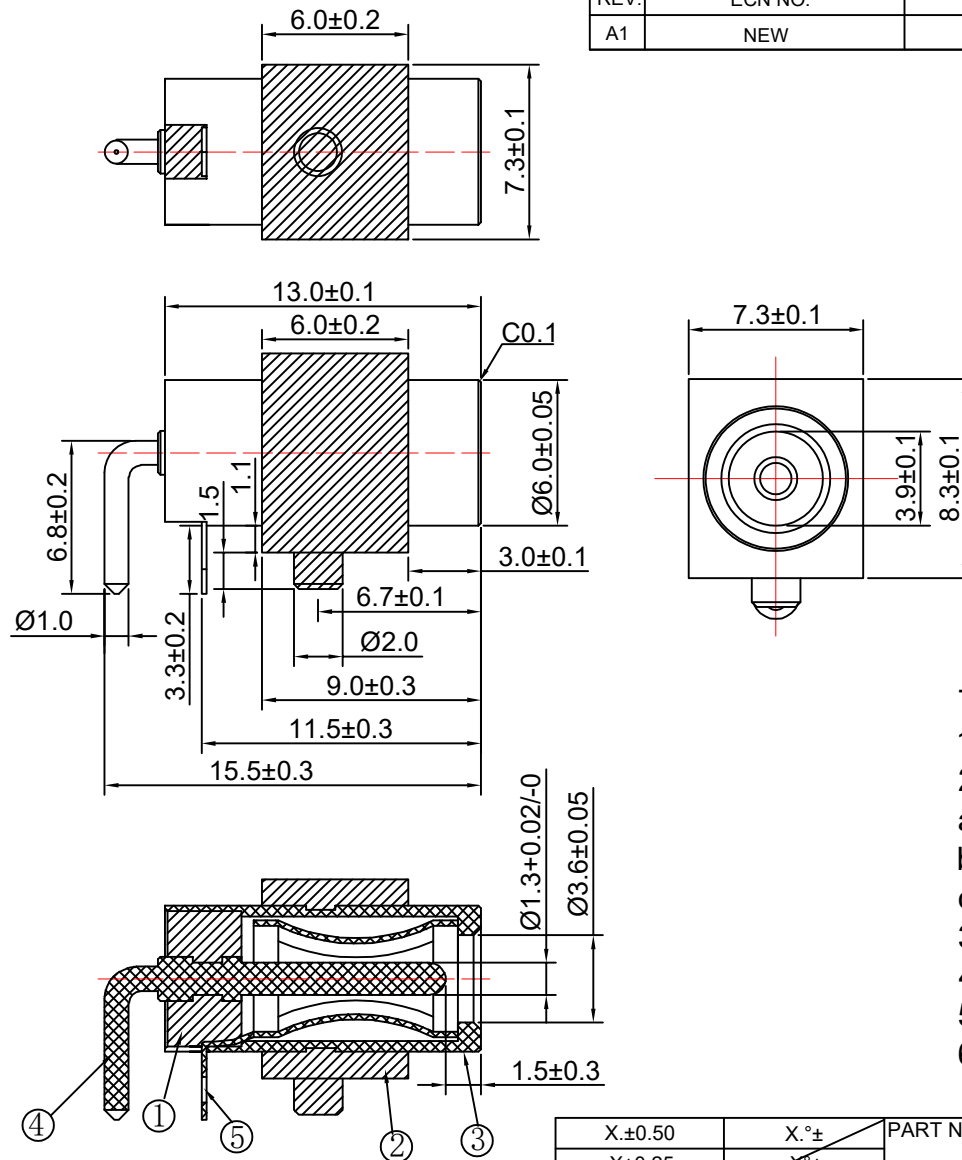


RoHS

REV.	ECN NO.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	新版发行	Chen HongJiang	Chen ZhiQiang	2025.05.08



Technology Request;
1.Outlook;No burr,no hurt.
2.Electronic performance;
a.Insulation resistance;Above DC500V/100MΩ;
b.Endur voiage;AC500V at 1 minute
c.Contact resistance;Under 30mΩ
3.Insertion force & withdrawal force;0.3-3kgf
4.Salt spray test;24H
5.Meet RoHS.
6.Remark * is important specification

5	带尾弹圈	C5191	Ni 1-3um
4	退火针	C3604	Ni 1-3um
3	6*13*3.6管	C3604	Ni 1-3um
2	PLASTIC	ABS	Black
1	PLASTIC	PBT	Black
NO	PART	MATERIAL	PLATING

X.±0.50	X.°±	PART NO: XF-35135JL60	XFCN 兴飞连接器				
.X±0.25	.X°±						
.XX±0.15	.XX°±	TITLE:	0769-82001899				
.XXX±0.10	.XXX°±	DC JACK Ø3.5*1.35*6.0-15.5L带片90°方胶	www.xfconn.com				
UNITS:	mm		DWG NO:				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF XFCN AND SHALL NOT BE REPRODUCED,COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF XFCN		APPD	Chen ZhiQiang				
		CHKD	Liu Wei				VIEW
		DRAW	Chen HongJiang		SCALE	SHEET	REV
		DATE	2025.05.08		NONE	1/1	A1