
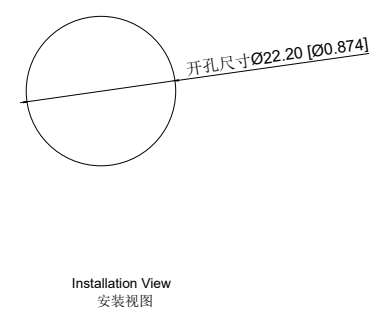
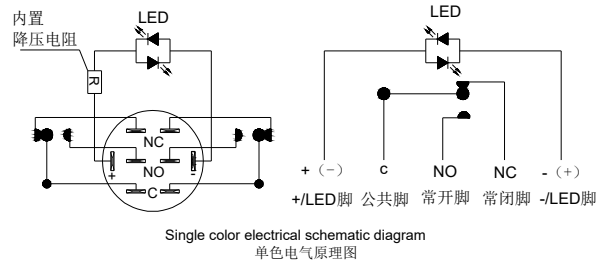
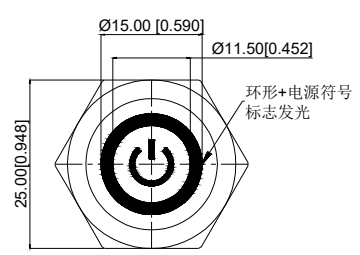
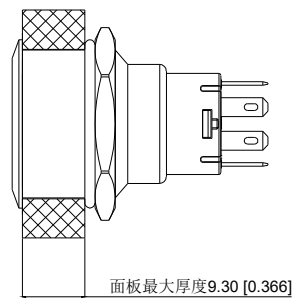
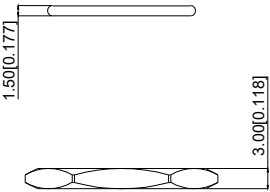
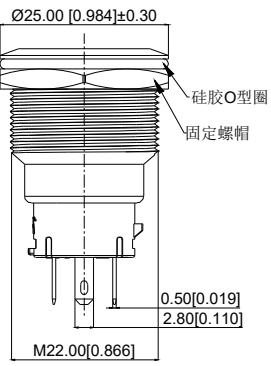
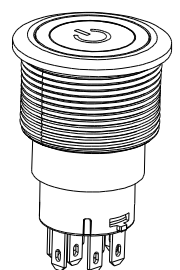
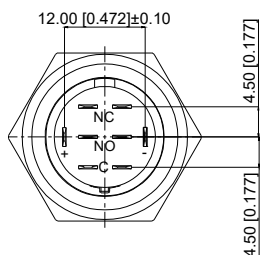


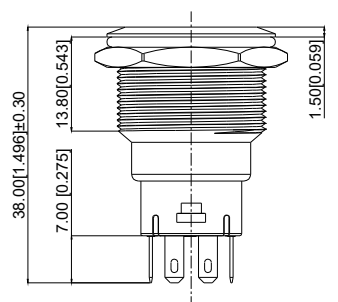

A4				 台普 ROC PU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP92218P124RS
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.roc pu. tw
A1					X.X	± 0.15	ROC PU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION	ISSUE	X	± 0.25					
					ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				

A		B		C		D		E		F		G	
1	性能参数											1	
	1. Heating current: Ui: AC250V, lth: 5A 发热电流: Ui: AC250V, lth: 5A												
	2. Rated current:3A/DC36V 额定电流:3A/DC36V												
2	3. Power-frequency withstand voltage:2000V1min 工频耐压:2000V1min											2	
	4. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ												
	5. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ												
3	6. Pressing stroke:3.00mm ± 0.10 按压行程:3.00mm ± 0.10											3	
	7. Contact stroke:1.50mm±0.10 接触行程 :1.50mm±0.10												
	8. Nut assembly torque:5-14N 螺帽装配力矩:5-14N												
4	9. Protection level:IP67 防护等级:IP67											4	
	10. Explosion prevention level: IK10 防暴等级: IK10												
	11. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃												
5	12. Compression torque: ≤ 6N 按压扭力: ≤ 6N											5	
	连接形式												
	1. Welding temperature of wire: 320 ± 20 ℃ 线材焊接温度: 320±20℃ Wire welding duration: less than 3 seconds 线材焊接时长: 时长3秒以下												
6	2. Can be used with dedicated connectors: 可配专用接插件使用:											6	
	2.1 1NO1NCSwitch function wire: green (C) blue wire (NO) yellow wire (NC) 1NO1NC开关功能线材: 绿色(C) 蓝线 (NO) 黄线 (NC)												
	2.2 2NO2NC switch function wire: green black wire C, blue black wire NO, yellow white wire NC 2NO2NC开关功能线材: 绿黑线C、蓝黑线NO、黄白线NC												
7	2.3 LED functional wire: red wire positive pole black wire negative pole LED without distinguishing positive and negative poles LED功能线材: 红线正极 黑线负极 LED不分正负极											7	
8												8	
9												9	
10												10	
11												11	
12												12	
13												13	
14												14	
15												15	
16												16	
17												17	
18												18	
19												19	
20												20	
21												21	
22												22	
23												23	
24												24	
25												25	
26												26	
27												27	
28												28	
29												29	
30												30	
31												31	
32												32	
33												33	
34												34	
35												35	
36												36	
37												37	
38												38	
39												39	
40												40	
41												41	
42												42	
43												43	
44												44	
45												45	
46												46	
47												47	
48												48	
49												49	
50												50	
51												51	
52												52	
53												53	
54												54	
55												55	
56												56	
57												57	
58												58	
59												59	
60												60	
61												61	
62												62	
63												63	
64												64	
65												65	
66												66	
67												67	
68												68	
69												69	
70												70	
71												71	
72												72	
73												73	
74												74	
75												75	
76												76	
77												77	
78												78	
79												79	
80												80	
81												81	
82												82	
83												83	
84												84	
85												85	
86												86	
87												87	
88												88	
89												89	
90												90	
91												91	
92												92	
93												93	
94												94	
95												95	
96												96	
97												97	
98												98	
99												99	
100												100	
101												101	
102												102	
103												103	
104												104	
105												105	
106												106	
107												107	
108												108	
109												109	
110												110	
111												111	
112												112	
113												113	
114												114	
115												115	
116												116	
117												117	
118												118	
119												119	
120												120	
121												121	
122												122	
123												123	
124												124	
125												125	
126												126	
127												127	
128												128	
129												129	
130												130	
131												131	
132												132	
133												133	
134												134	
135												135	
136												136	
137												137	
138												138	
139												139	
140												140	
141												141	
142												142	
143												143	
144												144	
145												145	
146												146	
147												147	
148												148	
149												149	
150												150	
151												151	
152												152	
153												153	
154												154	
155												155	
156												156	
157												157	
158												158	
159												159	
160												160	
161												161	
162												162	
163												163	
164												164	
165												165	
166												166	
167												167	
168												168	
169												169	
170												170	
171												171	
172												172	
173												173	
174												174	
175												175	
176												176	
177												177	
178												178	
179												179	
180												180	
181												181	
182												182	
183												183	
184												184	
185												185	
186												186	
187												187	
188												188	
189												189	
190												190	
191												191	
192												192	
193												193	
194												194	
195												195	
196												196	
197												197	
198												198	
199												199	
200												200	
201												201	
202												202	
203												203	
204												204	
205												205	
206												206	
207												207	

A		B		C		D		E		F		G	
材质参数													
10	luminous zone 发光区			PC 塑胶		1							
9	LEDpin LED引脚			Brass 黄铜		1		Silvering 镀银					
8	Base 底座			PA46		1							
7	Pin 引脚			Brass 黄铜		1		gold-plating 镀金					
6	Contact material 接触材质			silver alloy 银合金		1		Silvering 镀银					
5	LED Base LED底座			PC 塑胶		1							
4	Arm nut 固定螺帽			Brass 黄铜		1		nickeling 镀镍					
3	Oring O型圈			Silica gel 硅胶		1							
2	Housing 外壳			SUS 不锈钢		1							
1	Key 按键			SUS 不锈钢		1							
NO 序号	Part name 部件名			Material 材料		QTY 数量		Remark 备注					

A4				 台普 ROCPSU	COMMON TOLERANCE		UNIT	MM	PROJCTED		PRODUCT NAME:		
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP92218P124RS		
A2					DATE	2019	APPROVAL B	ALEN	Https: www.rocpsu.tw				
A1					ROCPSU TECHNOLOGY CO.,LTD								
REV	DATE	REVISION	DESCRIPTION									ISSUE	
A		B		C		D		E		F		G	
Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission													