

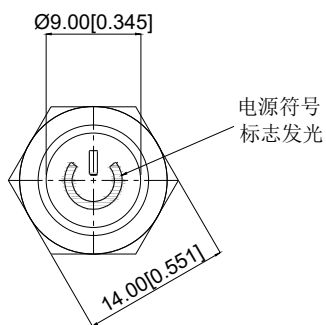
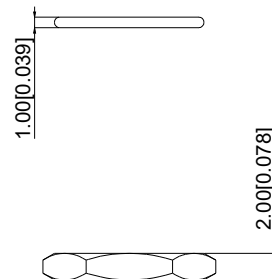
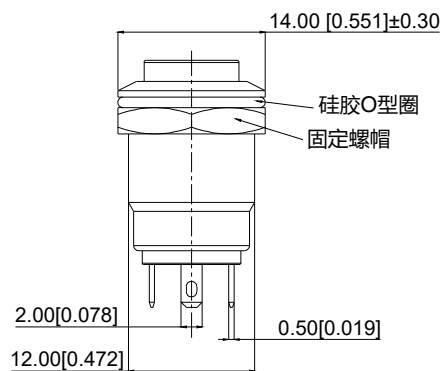
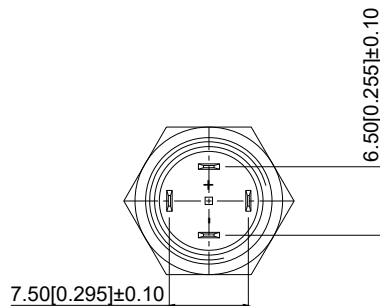
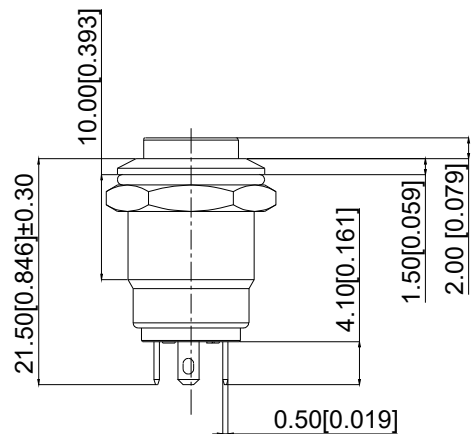




Schematic Diagram
电气原理图

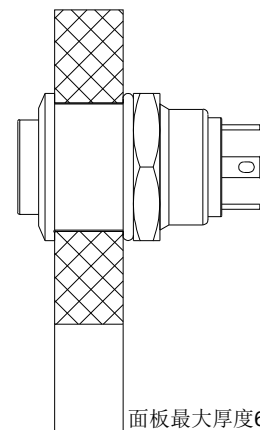

面板最大厚度6.50[0.255]

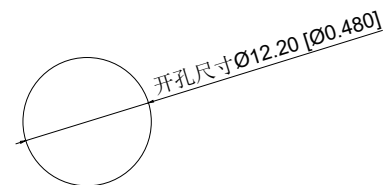

Installation View
安装视图

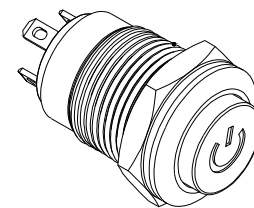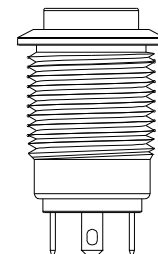

A4				
A3				
A2				
A1				
REV	DATE	REVISION	DESCRIPTION	ISSUE



COMMON TOLERANCE

X.XX	± 0.10
X.X	± 0.15
X	± 0.25
ANGULAR	—

UNIT	MM	PROJECTED		PRODUCT NAME:
DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91210G224GS
DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
ROCPCU TECHNOLOGY CO.,LTD				
Copies are issued in strict confidence and shall not be reproduced or copied, or used as the basic of manufacture or sale of apparatus without permission				

A				B		C		D		E		F		G	
1	性能参数														
	1. Heating current: Ui: AC250V, Ith: 3A 发热电流: Ui: AC250V, Ith: 3A														
	2. Rated current:2A/DC36V 额定电流:2A/DC36V														
	3. Power-frequency withstand voltage:2000V1min 工频耐压:2000V1min														
2	4. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ														
	5. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ														
	6. Pressing stroke:1.80mm ± 0.10 按压行程:1.80mm ± 0.10														
	7. Contact stroke:0.60mm±0.10 接触行程 :0.60mm±0.10														
3	8. welding temperature: 320 °C± 20 °C 焊接温度: 320 °C± 20 °C														
	9. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration														
	10. Nut assembly torque:5-14N 螺帽装配力矩:5-14N														
	11. Protection level:IP65 防护等级:IP65														
4	12. Explosion prevention level: IK08 防暴等级: IK08														
	13. Working environment temperature: -20 °C~+55 °C 工作环境温度: -20 °C~+55 °C														
	14. Compression torque: ≤ 3N 按压扭力: ≤3N														
	15. Electrical life: 100000 cycles 电气寿命: 100000 cycles														
5	16. mechanical: 5000000cycles 机械寿命: 5000000cycles														
	17. Operation method:Self compound 操作方式: 自复式														
	18. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N														
	19. LED lamp power consumption: 20m以下 LED灯功耗: 20m以下														
6	20. LED lamp lifespan: 40000h LED寿命: 40000h														
	21. LED color: Green LED颜色: 绿色														
7															
8															
9															
10															
11															
12															
13															
14															
15															
16															
17															
18															
19															
20															
21															
22															
23															
24															
25															
26															
27															
28															
29															
30															
31															
32															
33															
34															
35															
36															
37															
38															
39															
40															
41															
42															
43															
44															
45															
46															
47															
48															
49															
50															
51															
52															
53															
54															
55															
56															
57															
58															
59															
60															
61															
62															
63															
64															
65															
66															
67															
68															
69															
70															
71															
72															
73															
74															
75															
76															
77															
78															
79															
80															
81															
82															
83															
84															
85															
86															
87															
88															
89															
90															
91															
92															
93															
94															
95															
96															
97															
98															
99															
100															

A4				 台 普 ROC PU	COMMON TOLERANCE		UNIT	MM	PROJCTED		PRODUCT NAME:				
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91210G224GS				
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpu.tw				
A1					X.X	± 0.15	ROC PU TECHNOLOGY CO.,LTD								
REV	DATE	REVISION	DESCRIPTION		ISSUE	X								± 0.25	
						ANGULAR	——	Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission							
A				B		C		D		E		F		G	

		A			B			C			D			E			F			G							
1		材质参数																				1					
2		9		luminous zone 发光区				PC 塑料				1										2					
		8		LEDpin LED脚				Brass 黄铜				1				Silvering 镀银											
		7		Pin 引脚				Brass 黄铜				1				gold-plating 镀金											
		6		Contact material 接触材质				silver alloy 银合金				1				Silvering 镀银											
3		5		Base 基座				PBT				1										3					
		4		Arm nut 固定螺帽				Brass 黄铜				1				nickeling 镀镍											
		3		Oring O型圈				Silica gel 硅胶				1															
4		2		Housing 外壳				SUS 不锈钢				1										4					
		1		Key 按键				SUS 不锈钢				1															
		NO 序号		Part name 部件名				Material 材料				QTY 数量				Remark 备注											
5		A4								台普 ROC PU		COMMON TOLERANCE		UNIT		MM		PROJCTED				PRODUCT NAME:		5			
		DRAWN BY		FUYUAN		CHECKED BY		COCO						MODEL NO: TP91210G224GS													
		A3										DATE		2019		APPROVAL B		ALEN		Https: www.rocpu.tw							
		A2										X.XX		± 0.10		ROC PU TECHNOLOGY CO.,LTD											
		A1										X.X		± 0.15													
REV		DATE		REVISION		DESCRIPTION		ISSUE		X		± 0.25															
										ANGULAR		——		Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission													
		A				B				C				D				E				F				G	