



Features

- Fast switching speed
- High conductance



Mechanical Data

- Case: SOT-363

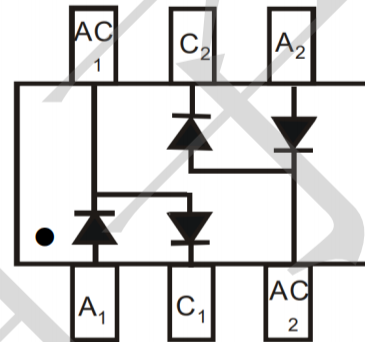

BAV99DW

Ordering Information

Part Number	Package	Shipping Quantity
BAV99DW	SOT-363	3000 pcs / Tape & Reel

Maximum Ratings (@ T_A= 25°C unless otherwise specified)

Parameter	Symbol	Value	Unit
Non-repetitive Peak Reverse Voltage	V _{RM}	100	V
Peak Repetitive Peak Reverse Voltage	V _{RPM}	75	V
Working Peak Reverse Voltage	V _{RWM}	75	V
DC Blocking Voltage	V _R	75	V
Forward Continuous Current	I _F	215	mA
Peak Forward Surge Current, 1μs Single Half-sine-wave	I _{FSM}	2	A
Peak Forward Surge Current, 1ms Single Half-sine-wave	I _{FSM}	1	A
Peak Forward Surge Current, 1s Single Half-sine-wave	I _{FSM}	0.5	A

Thermal Characteristics

Parameter	Symbol	Value	Unit
Power Dissipation	P_D	200	mW
Operating Junction Temperature Range	T_J	-65 ~ +150	°C
Storage Temperature Range	T_{STG}	-65 ~ +150	°C

Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Reverse Breakdown Voltage	$V_{(BR)}$	$I_R = 2.5\mu\text{A}$	75	-	-	V
Forward Voltage	V_F	$I_F = 1\text{mA}$	-	-	0.715	V
		$I_F = 10\text{mA}$	-	-	0.855	V
		$I_F = 50\text{mA}$	-	-	1.000	V
		$I_F = 150\text{mA}$	-	-	1.250	V
Reverse Current	I_R	$V_R = 75\text{V}$	-	-	2.5	μA
		$V_R = 20\text{V}$	-	-	25	nA
		$V_R = 25\text{V}, T_J = 125^\circ\text{C}$	-	-	30	μA
		$V_R = 75\text{V}, T_J = 150^\circ\text{C}$	-	-	50	μA
Diode capacitance	C_J	$V_R = 0\text{V}, f = 1\text{MHz}$	-	-	2	pF
Reverse Recovery Time	t_{rr}	$I_F = I_R = 10\text{mA}$ $I_{rr} = 0.1 \times I_R, R_L = 100\Omega$	-	-	4	ns

Ratings and Characteristics Curves (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

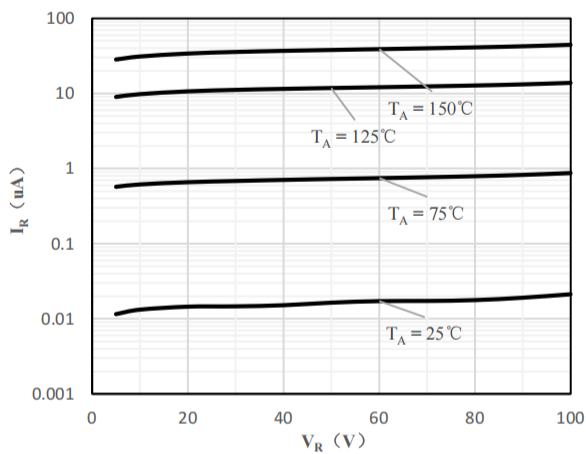


Fig 1 Typical Reverse Characteristic

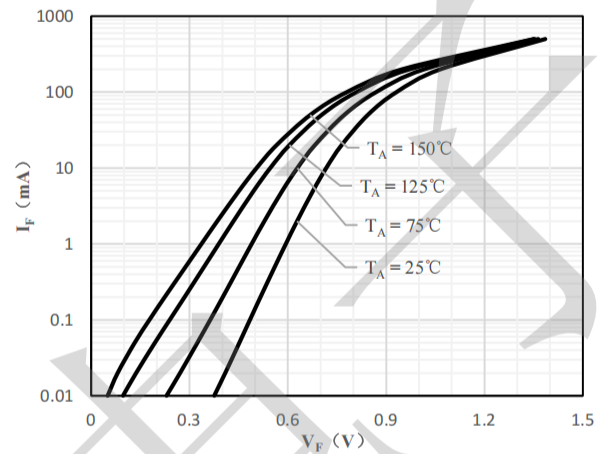


Fig 2 Typical Forward Characteristics

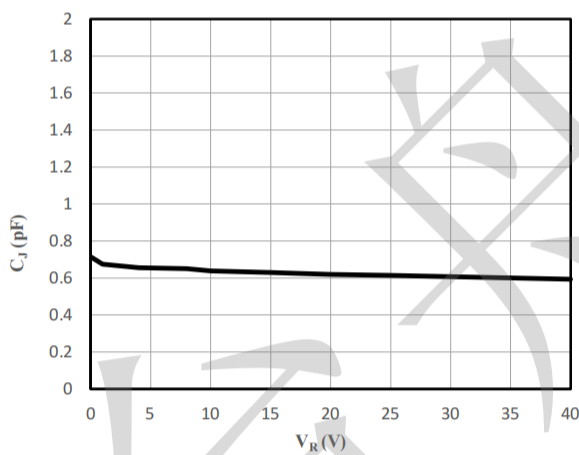


Fig 3 Capacitance vs. Reverse Voltage


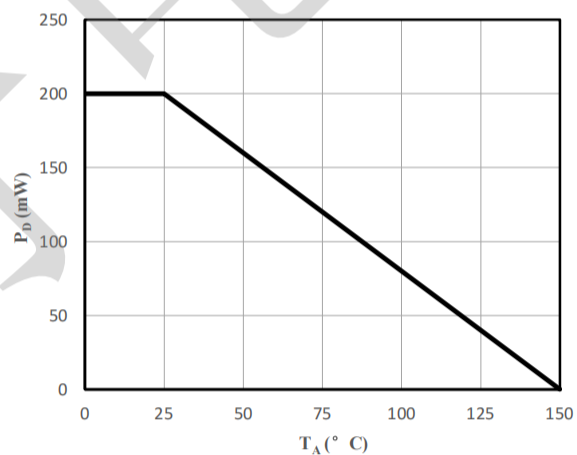


Fig 4 Power Derating Curve

Package Outline Dimensions (unit:mm)

SOT-363

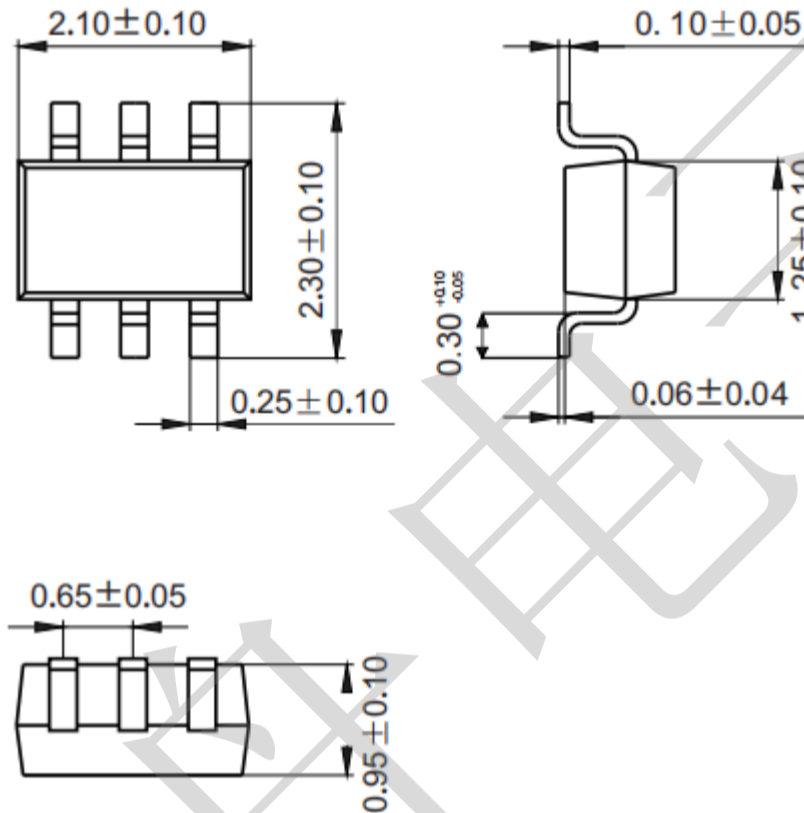

Mounting Pad Layout (unit: mm)

