



深圳东裕光大电子有限公司  
广州市东裕光电科技有限公司

## 样品承认书

### Sample Approve Sheet

客户名称 (Customer name) : \_\_\_\_\_

组件名称 (Production name) : \_\_\_\_\_

型 号 (Model) : DY-0603UGC-L-SMG

编 号 (Part number) : \_\_\_\_\_

日 期 (Date) : 2020.2.11

地址(Add): 深圳市光明区凤凰街道光明大道 481 号乐府广场 1B 栋 1609-1611

厂址(Add): 广东省广州市番禺区石基镇海涌路 3 号 10 号厂房 2 楼

电话(Tel): 0755-88366557 020-39294688

传真(Fax): 020-39966833


网址(Net): [www.tonyuled.cn](http://www.tonyuled.cn) [www.tonyuled.com](http://www.tonyuled.com)



| 客户确认<br>CUSTOMER CONFIRMATION | 审 核<br>CHECKED BY | 编 制<br>PREPARED BY |
|-------------------------------|-------------------|--------------------|
|                               | 汪建新               | 陈少龙                |

### Features( 特征)

- Extremely wide viewing angle. (宽的发光角度)
- Suitable for all SMT assembly and solder process. (适用于所有的SMT组装和焊接工艺)
- Available on tape and reel. (适用于载带及卷轴)
- Moisture sensitivity level: Level 4. (防潮等级 Level 4)
- Package: 4000pcs/reel. (包装每卷4000PCS)
- RoHS compliant. (RoHS 认证)



### Description (描述)

- 外观尺寸/ Package (L/W/H): 1.6\*0.8\*0.68mm
- 颜色/ Color: 翠绿 / Green light





### Package Dimensions (封装尺寸)

### Applications (应用)

- Optical indicator (光学指示)
- Backlight for LCD, switch and Symbol, display  
(LCD背光、转换器, 开关和标志, 显示器等)
- General use (一般应用)

### Recommended Soldering Pattern

(建议焊盘尺寸图)

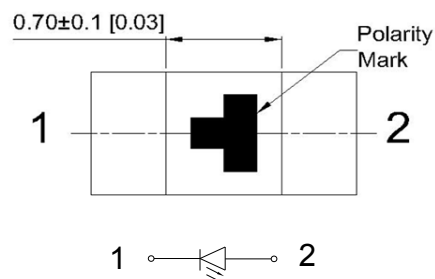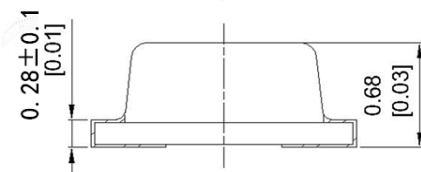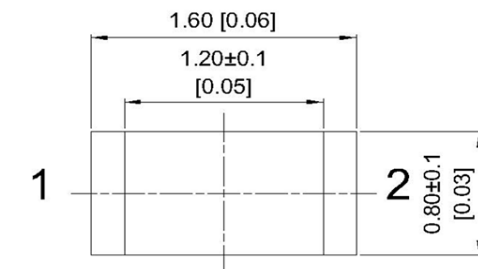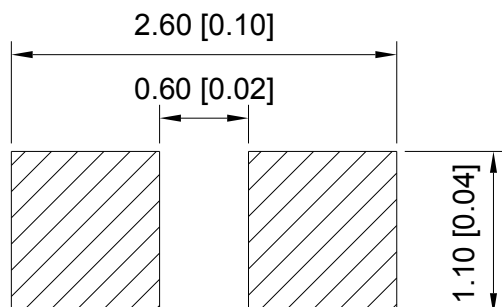

Notes: (备注)

1. Mark the size of the unit is mm. marked in brackets (标注尺寸单位为毫米, 括号内标注为英寸)
2. All dimensions allow tolerance  $\pm 0.1\text{mm}$  (所有尺寸允许公差  $\pm 0.1\text{mm}$ )

### Selection Guide (选择指南)

| Part No. 型号  | Dice              | Lens Type<br>胶体类型 | Luminous intensity(mcd)<br>光强@ 10mA |     | Angle<br>角度 |
|--------------|-------------------|-------------------|-------------------------------------|-----|-------------|
|              |                   |                   | Min                                 | Max | 2θ1/2       |
| DY-0603UGC-L | Green<br>(InGaN ) | Water Clear       | 350                                 | 460 | 130°        |
|              |                   |                   | 460                                 | 600 |             |
|              |                   |                   | 600                                 | 780 |             |

Note:(备注)

1. The 2θ1/2 measurement error  $\pm 10$  degrees( 角度测试误差为 $\pm 10^\circ$  )
2. the above luminous intensity measurement allowance tolerance  $\pm 10\%$ .  
上述发光强度的测试允许公差为 $\pm 10\%$

### Electrical / Optical Characteristics at Ta=25°C 电性与光学特性

| Parameter (参数)             | Symbol<br>(符号) | Min.<br>(最小) | Typ.<br>(平均) | Max.<br>(最大) | Units<br>(单位) | Test<br>Conditions<br>测试条件 |
|----------------------------|----------------|--------------|--------------|--------------|---------------|----------------------------|
| Forward Voltage<br>正向电压    | V <sub>F</sub> | 2.6          | --           | 3.2          | V             | I <sub>F</sub> =10mA       |
| Dominate Wavelength<br>主波长 | λ <sub>d</sub> | 517          | --           | 527          | nm            | I <sub>F</sub> =10mA       |
| Reverse Current<br>反向电流    | I <sub>R</sub> | --           | --           | 10           | μA            | V <sub>R</sub> = 5V        |

### Absolute Maximum Ratings at Ta=25°C 绝对最大额定值


| Parameter (参数)                     | Symbol (符号)      | Rating (值) | Units (单位) |
|------------------------------------|------------------|------------|------------|
| Power Dissipation (功耗)             | P <sub>d</sub>   | 96         | mW         |
| Forward Current (正向电流)             | I <sub>F</sub>   | 30         | mA         |
| Peak Pulse Current [1] (峰值脉冲电流)    | I <sub>FP</sub>  | 60         | mA         |
| Electrostatic Discharge (HBM) (静电) | ESD              | 1000       | V          |
| Operating Temperature (操作温度)       | T <sub>opr</sub> | -40 ~ +85  | °C         |
| Storage Temperature (保存温度)         | T <sub>stg</sub> | -40 ~ +100 | °C         |

Note: (备注)


1. 1/10 Duty cycle, 0.1ms pulse width. (脉宽0.1ms, 周期1/10)
2. The above forward voltage measurement allowance tolerance is  $\pm 0.1V$ . (以上所示电压测量误差 $\pm 0.1V$ )

### Typical optical characteristics curves 典型光学特性曲线


Ambient Temperature VS Allowable Forward Current  
周围温度与允许电流特性

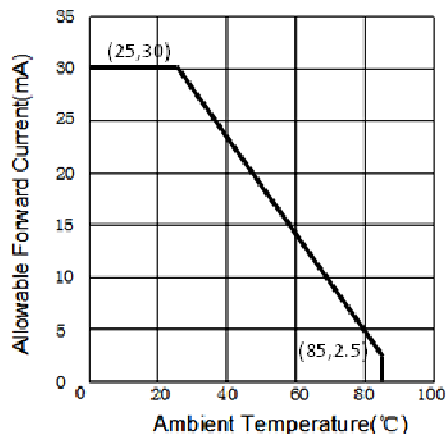


Forward Current VS. Relative Intensity  
正向电流与相对光强特性曲线

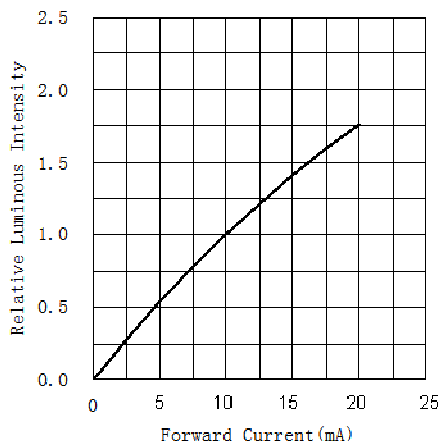


Forward Voltage VS. Forward Current  
正向电压与正向电流特性曲线

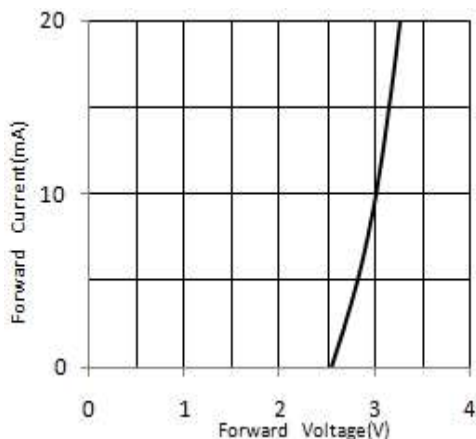


Ambient Temperature VS. Relative Intensity  
环境温度与相对光强特性曲线

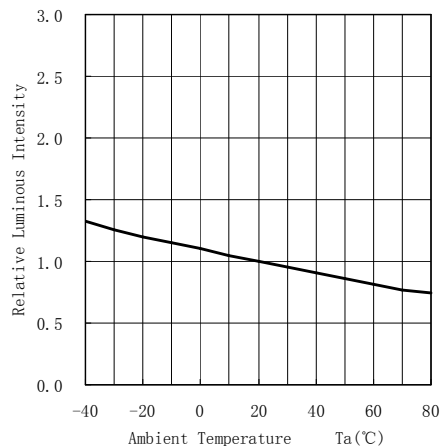

Relative spectral emission  
相对光谱分布特性曲线

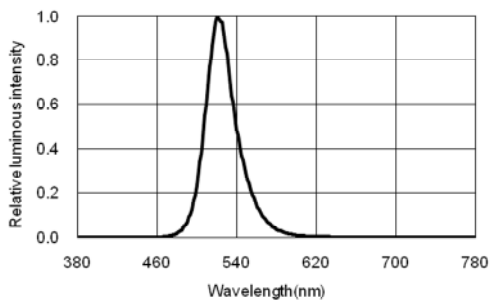

Radiation diagram  
辐射图特性曲线

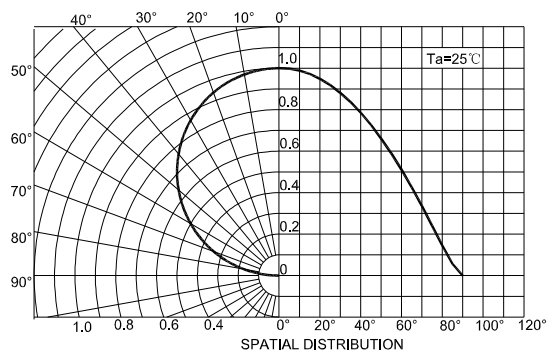

### Reliability Test Items And Conditions 信赖性测试项目及条件

| Test Items<br>项目                            | Ref.Standard<br>参考标准 | Test Condition<br>测试条件                        | Time<br>时间 | Quantity<br>数量 | Ac/Re<br>接收/拒收 |
|---------------------------------------------|----------------------|-----------------------------------------------|------------|----------------|----------------|
| Reflow<br>回流焊                               | JESD22-B106          | Temp:260℃max<br>T=10 sec                      | 3 times.   | 22Pcs.         | 0/1            |
| Temperature Cycle<br>温度循环                   | JESD22-A104          | 100℃±5℃ 30 min.<br>↑↓5 min<br>-40℃±5℃ 30 min. | 100 Cycles | 22Pcs.         | 0/1            |
| High Temperature Storage<br>高温保存            | JESD22-A103          | Temp:100℃±5℃                                  | 1000Hrs.   | 11Pcs.         | 0/1            |
| Low Temperature Storage<br>低温保存             | JESD22-A119          | Temp:-40℃±5℃                                  | 1000Hrs.   | 11Pcs.         | 0/1            |
| Life Test<br>常温通电                           | JESD22-A108          | Ta=25℃±5℃<br>IF=10mA                          | 1000Hrs.   | 11Pcs.         | 0/1            |
| High Temperature<br>High Humidity<br>高温高湿保存 | JESD22-A101          | 85℃±5℃/ 85%RH                                 | 1000Hrs.   | 11Pcs.         | 0/1            |

### Criteria For Judging Damage 失效判定标准

| Test Items<br>项目        | Symbol<br>符号 | Test Condition<br>测试条件 | Criteria For Judgement<br>判定标准 |             |
|-------------------------|--------------|------------------------|--------------------------------|-------------|
|                         |              |                        | Min. 最小                        | Max. 最大     |
| Forward Voltage<br>正向电压 | VF           | IF=10mA                | --                             | U.S.L*)x1.1 |
| Luminous Flux<br>光通量    | Im           | IF=10mA                | L.S.L*)x0.7                    | --          |

U.S.L: Upper standard level 规格上限

L.S.L: Lower standard level 规格下限

\*The technical information shown in the data sheets are limited to the typical characteristics and circuit examples of the referenced products. It does not constitute the warranting of industrial property nor the granting of any license.


数据工作表中所示的技术信息仅限于典型特征和电路实例引用的产品。它既不构成工业特性的保证,也不构成任何许可的授权

### SMT Reflow Soldering Instructions SMT回流焊说明

1.Reflow soldering should not be done more than two times. 回流焊不可以做两次以上

2.When soldering , do not put stress on the LEDs during heating

当焊接时，不要在材料受热时用力压胶体表面

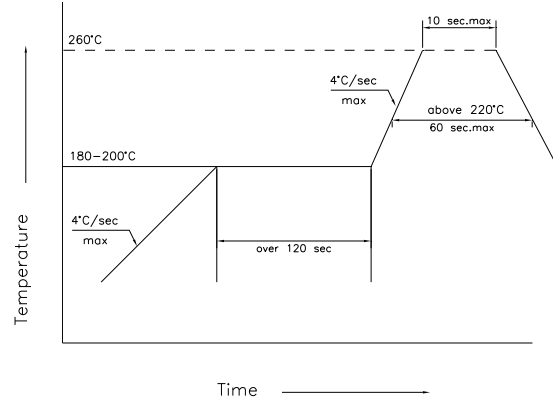

### Soldering iron 烙铁焊接

1.When hand soldering, keep the temperature of iron below less 300°C less than 3 seconds

当手工焊接时，烙铁的温度必须小于300°C，时间不可超过3秒


2.The hand solder should be done only one times

手工焊接只可焊接一次

### Repairing 修补

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed in advance whether the characteristics of LEDs will or will not be damaged by repairing.

LED回流焊后不应该修复，当修复是不可避免时，必须使用双头烙铁（如下图），但必须事先确认此种方式会或不会损坏LED本身的特性。

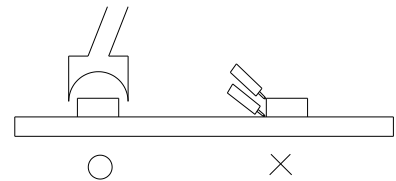

### Cautions 注意事项

The encapsulated material of the LEDs is silicone. Therefore the LEDs have a soft surface on the top of package. The pressure to the top surface will be influence to the reliability of the LEDs. Precautions should be taken to avoid the strong pressure on the encapsulated part. So when use the picking up nozzle, the pressure on the silicone resin should be proper.

LED封装为硅胶，故LED胶体表面较软，用力按压胶体表面会影响LED可靠性，因此应有预防措施避免在封装的零件上的强大压力，当使用吸嘴时，胶体表面的压力应是恰当的。

3.Do not stack together assembled PCBs containing LEDs. Impact may scratch the silicone lens or damage the internal circuitry

不可将模组材料堆积在一起，它可能会损坏内部电路

4.Not suitable to operate in acidic environment, PH<7

不可用在PH<7的酸性场所

