

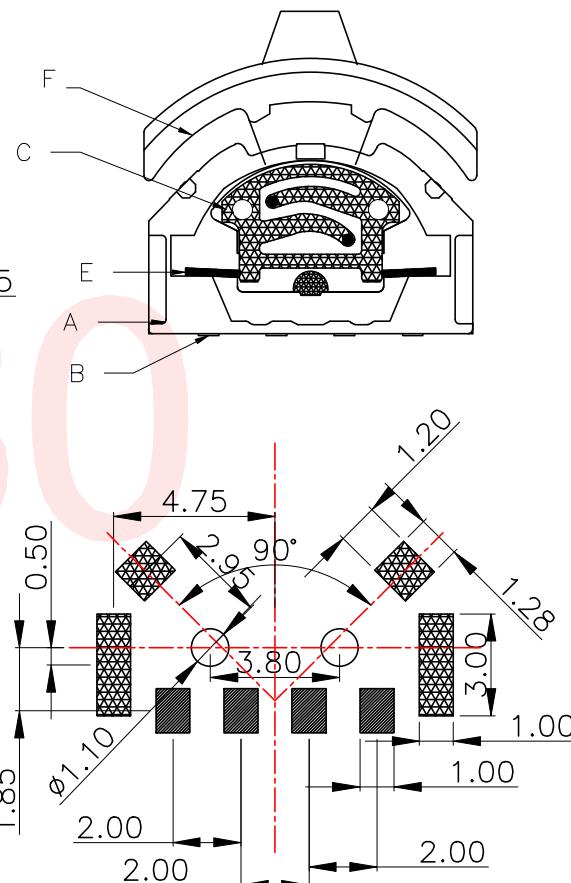






RoHS
Compliant
2011/65/EU

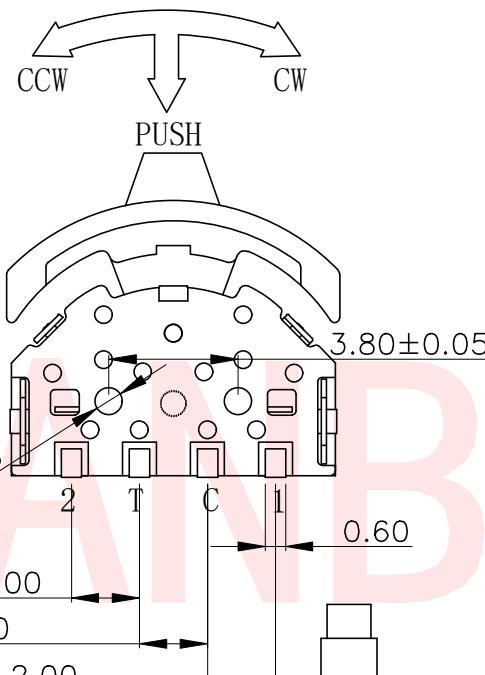

项 目		标 准
电气性能	额定电流 Rated Current:	0.1A MAX
	额定电压 Rated voltage:	DC 12V
	接触电阻 Contact resistance:	≤100mΩ
	绝缘电阻 Insulation Resistance:	≥100MΩ
	耐压强度 Compressive strength:	AC110V 50Hz/1 min
机械性能	操作力度 Operating force:	2.80±50gf 250±50gf
	机械寿命 Mechanical life:	1,0000 cycles Min
	操作行程 Operation Stroke:	0.8±0.2mm
环境性能	温度范围 Temperature Range:	-10°C ~ +60°C

F	手柄	1	尼龙	/	黑色	
E	弹簧	1	不锈钢丝	/	原色	
D	盖板	1	不锈钢	/	原色	
C	簧片	1	覆银铜	单边镀银	白色	
B	嵌件	1	磷铜	整体镀银	银白色	
A	底座	1	尼龙	/	黑色	
NO.	零件名称 Part Name	QTY	材 料 Material	镀涂 Plating coating	颜色 colour	备注 Remarks
UNLESS OTHERWISE SPECIFIED TOLERANCES			东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS: X :±0.30 X :±2° X.X :±0.20 X.X :±1° X.XX :±0.10			ANGLES: TITLE	Wheel switch series		
			DWN: xiong	PART NO. WS-003CB		
			CHKD: lee	SCALE:1:1	UNIT: mm	⊕
			APVD: wang	SIZE: A4	SHEET:10F 1	REV: A4
CUSTOMER COPY						

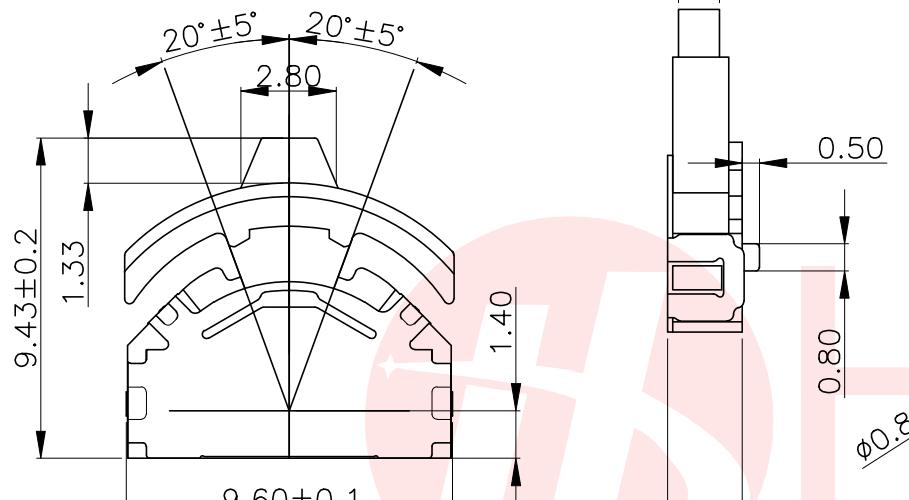


RoHS
Compliant
2011/65/EU



REV.	ECN NO OR DESCRIPTION	REVISED	DATE

A

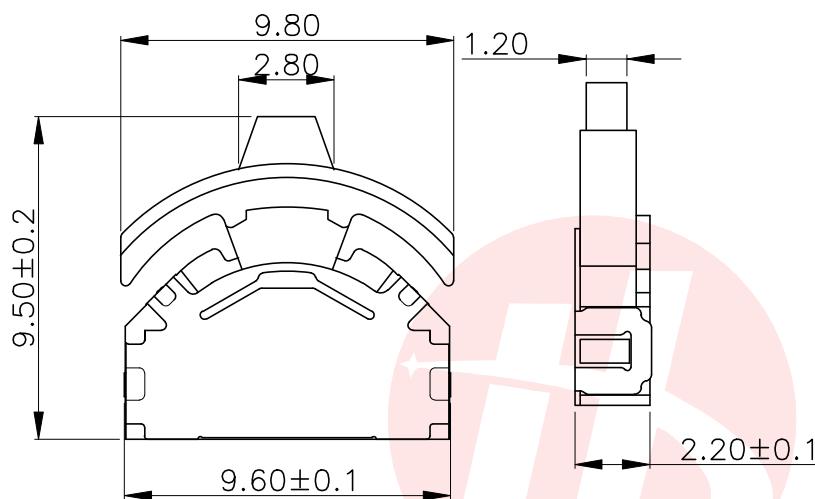

B

The diagram shows a stack structure. At the bottom, there is a horizontal line with two circles on it. The left circle contains the letter 'C' and the right circle contains the letter 'T'. Above this line, a curved arrow originates from the right side of the 'T' circle and points upwards and to the left, ending with an arrowhead pointing at the top circle. Above the top circle, the word 'PUSH' is written in capital letters.

C

A technical drawing of a component labeled 'D'. It features a central vertical rectangular block with a horizontal slot near the bottom. A horizontal arrow points to this slot, indicating its function.

The diagram shows a cross-section of a bridge pier. It features a central vertical column with a height of 1.85 and a thickness of 2.00. A horizontal beam connects the top of the column to a base plate. The base plate has a total width of 4.75 and a thickness of 1.00. Reinforcement is indicated by hatched areas: a vertical column of height 0.50 and a horizontal band of width 2.00 and height 3.00. A diagonal reinforcement band runs from the top-left corner to the top-right corner, with a height of 1.20 and a width of 1.20. A 90° angle is marked at the top center.

D

项 目		标 准
电气性能	额定电流 Rated Current:	0.1A MAX
	额定电压 Rated voltage:	DC 12V
	接触电阻 Contact resistance:	≤100mΩ
	绝缘电阻 Insulation Resistance:	≥100MΩ
	耐压强度 Compressive strength:	AC110V 50Hz/1 min
机械性能	操作力度 Operating force:	2-80±50gf 250±50gf
	机械寿命 Mechanical life:	1,0000 cycles Min
	操作行程 Operation Stroke:	0.8±0.2mm
环境性能	温度范围 Temperature Range:	-10°C ~ +60°C

F	手柄	1	尼龙	/	黑色	
E	弹簧	1	不锈钢丝	/	原色	
D	盖板	1	不锈钢	/	原色	
C	簧片	1	覆银铜	单边覆银	白色	
B	嵌件	1	磷铜	整体镀银	银白色	
A	底座	1	尼龙	/	黑色	
NO.	零件名称 Part Name	QTY	材 料 Material	镀涂 Plating coating	颜色 colour	备注 Remarks
UNLESS OTHERWISE SPECIFIED TOLERANCES			东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD			
DECIMALS: ANGLES:		TITLE	Wheel switch series			
X :±0.30	X :±2°	DWN	xiong	PART NO. WS-003CBW		
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm	⊕ ← →
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4
CUSTOMER COPY						