




CONNECTOR UNIT

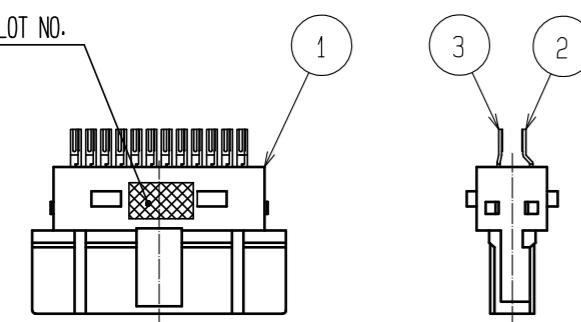


CONNECTOR AFTER COMPONENTS INSTALLED

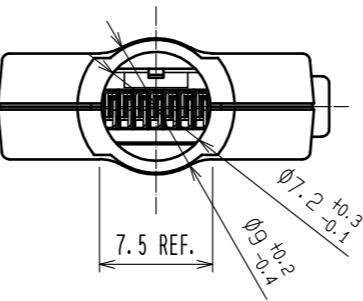


SIELD PLATE (A)

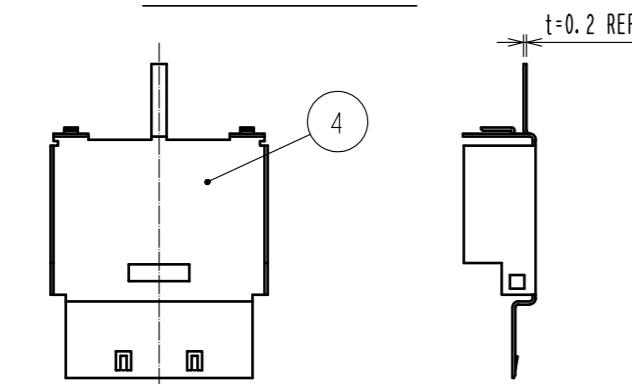


SIELD PLATE (B)

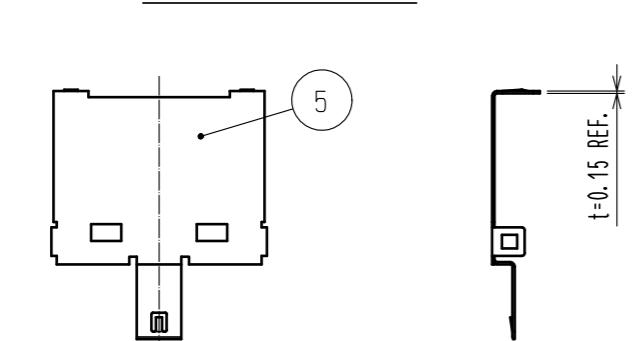

COVER CASE (A) WITH LOCK SPRINGS INSTALLED

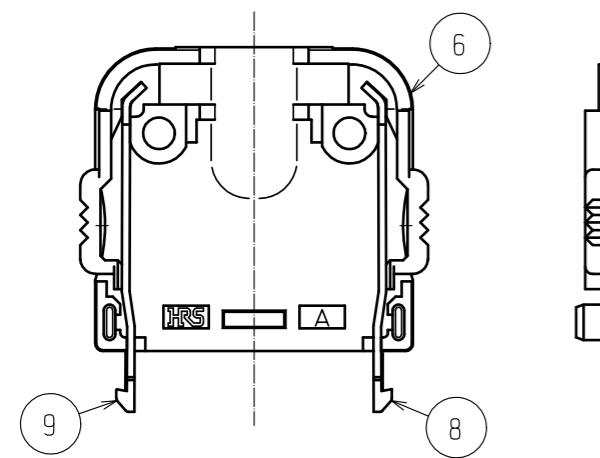

COVER CASE (B)

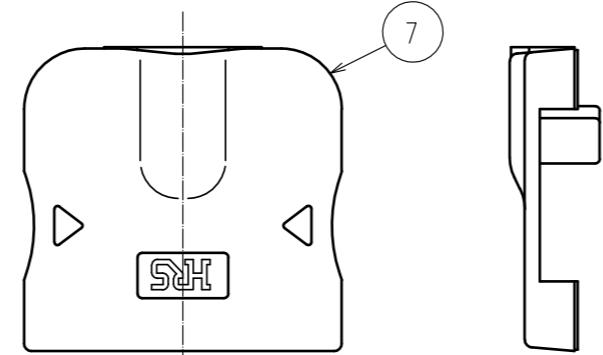

NOTES 1. PACKAGING:COMPONENTS ARE PACKED SEPARATELY BY THE TYPES OF PARTS WITH CROSS-CARVED TAPPING SCREWS(REF NO. 10) ATTACHED.

2. METAL CLAMP AND CABLE BUSHING ARE SEPARATELY AVAILABLE.

METAL CLAMP	ST40X-CM(5.8)	CL241-0024-0
CABLE BUSHING	ST40X-BS(5.8)	CL241-0025-3

3. COVER CASE (A) AND (B) SHALL BE FITTED ONLY ONE TIME DUE TO THEIR PRESS FITTING DESIGN.

4. REFER TO THE TECHNICAL SPECIFICATION(ETAP-E3217)FOR PACKING.

PATTERN OF MOUNTING METAL CLAMP AND CABLE BUSHING

