

SOT-89 Plastic-Encapsulate Transistors

Features


- Complementary to 2SA1204
- Power dissipation of 500mW
- High stability and high reliability
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260°C

Mechanical Data


- Case: SOT-89
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant,halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750,Method 2026

Function Diagram

XX = Device Code
PY. = 2SC2884-Y
PO = 2SC2884-O

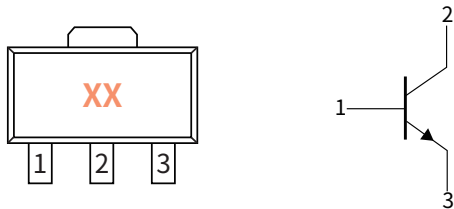

Collector-Base Voltage
VCBO 30V
Collector Current
0.8 Ampere

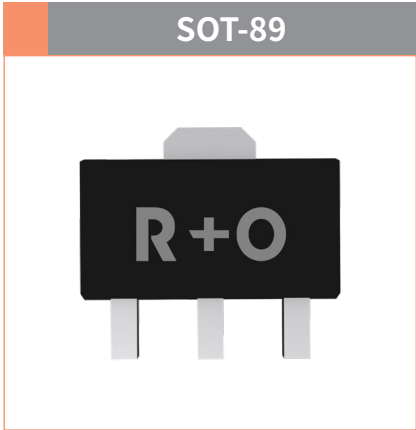

Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	VALUE
Collector-Base Voltage	V_{CBO}	V	35
Collector-Emitter Voltage	V_{CEO}		30
Emitter-Base Voltage	V_{EBO}		5.0
Collector Current	I_C	A	0.8
Collector Power Dissipation	P_C	mW	500
Storage temperature	T_{stg}	°C	-55 ~+150
Junction temperature	T_j	°C	150
Typical Thermal Resistance	$R_{\theta J-A}$	°C /W	250

Electrical Characteristics (Ta=25°C Unless otherwise noted)

PARAMETER	SYMBOL	UNIT	Condition	Min	Max
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	V	$I_C=1mA, I_E=0$	35	—
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$		$I_C=10mA, I_B=0$	30	—
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$		$I_E=1mA, I_C=0$	5.0	—
Collector-Base cut-off current	I_{CBO}	nA	$V_{CB}=35V, I_E=0$	—	100
Emitter-Base cut-off current	I_{EBO}		$V_{EB}=5.0V, I_C=0$	—	100
DC Current Gain	$h_{FE(1)}$	—	$I_C=100mA, V_{CE}=1.0V$	100	320
	$h_{FE(2)}$		$I_C=700mA, V_{CE}=1.0V$	35	—
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	V	$I_C=500mA, I_B=20mA$	—	0.5
Base-Emitter Saturation Voltage	$V_{BE(sat)}$	V	$I_C=500mA, I_B=20mA$	—	0.8

● Classification Of h_{FE}

RANK	O	Y
Range	100-200	160-320





● Small-signal Characteristics

ITEM	SYMBOL	Condition	UNIT	Min	Typ	Max
Transition frequency	f_T	$I_C=10mA, V_{CE}=5V$	MHz	—	120	—



● Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOT-89	R1	0.055	1000	7000	21000	7"


● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

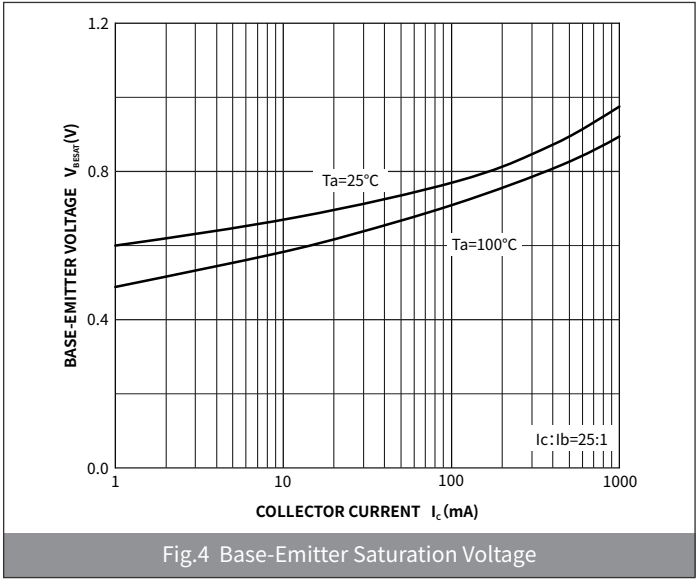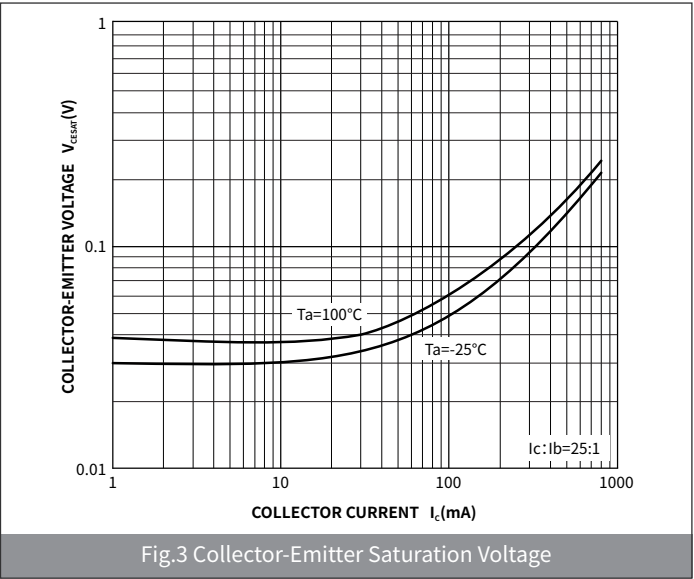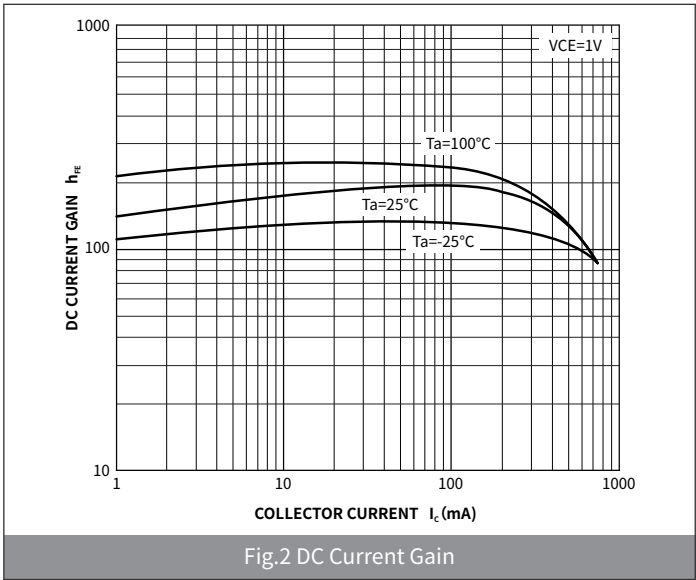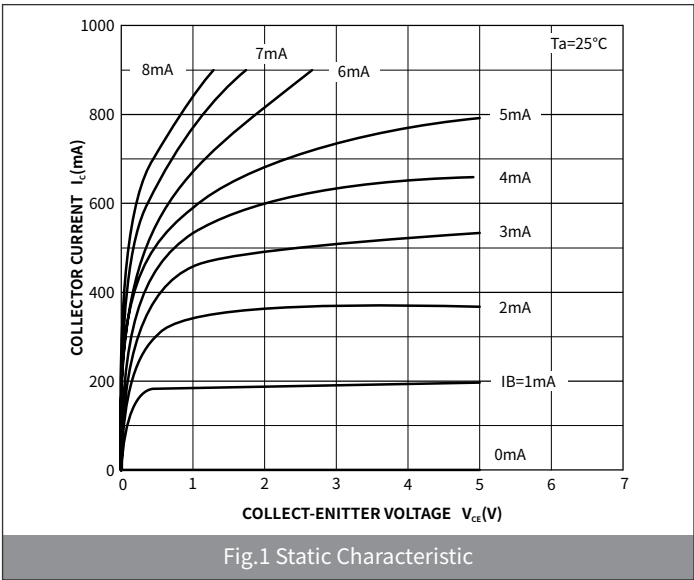

● Ratings And Characteristics Curves (Ta=25°C Unless otherwise specified)

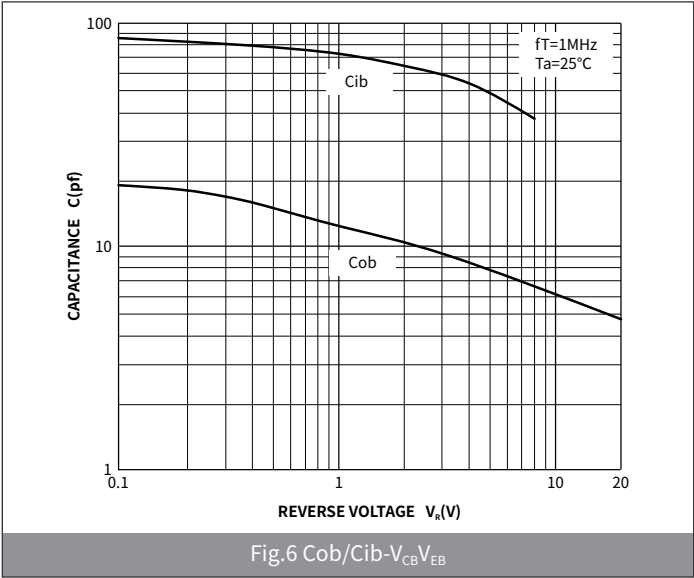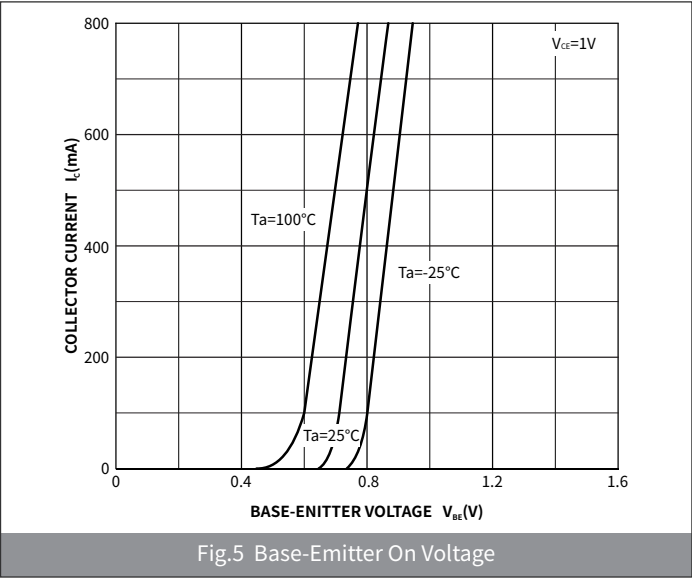

● Package Outline Dimensions (SOT-89)

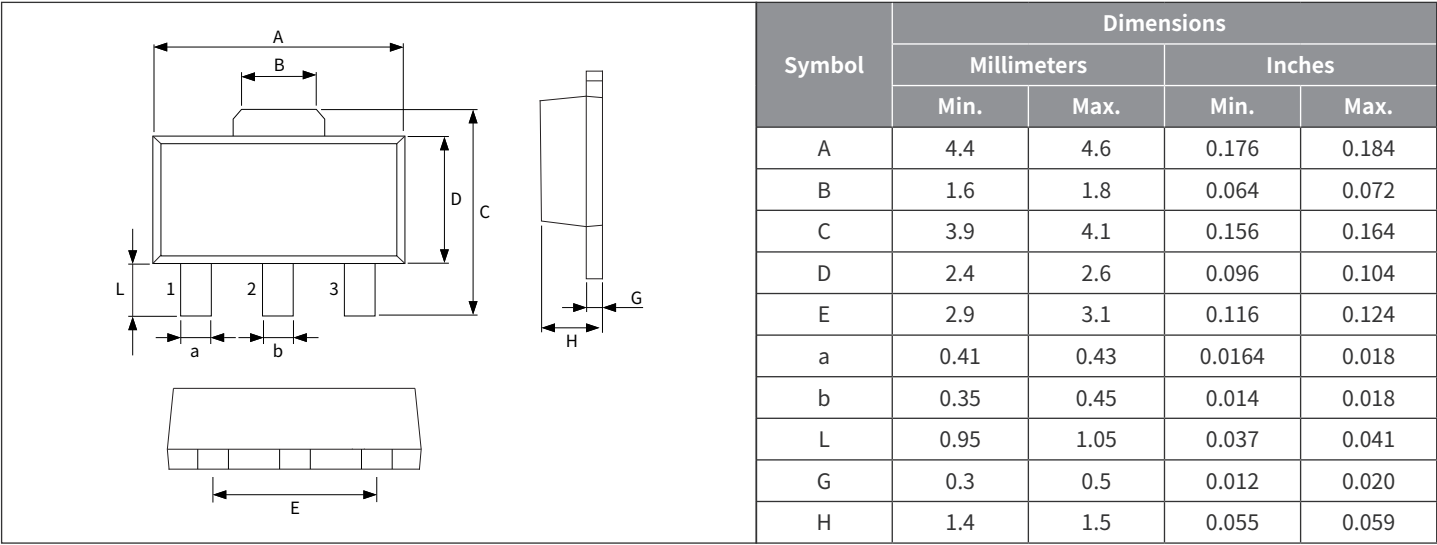

● Suggested Pad Layout

