
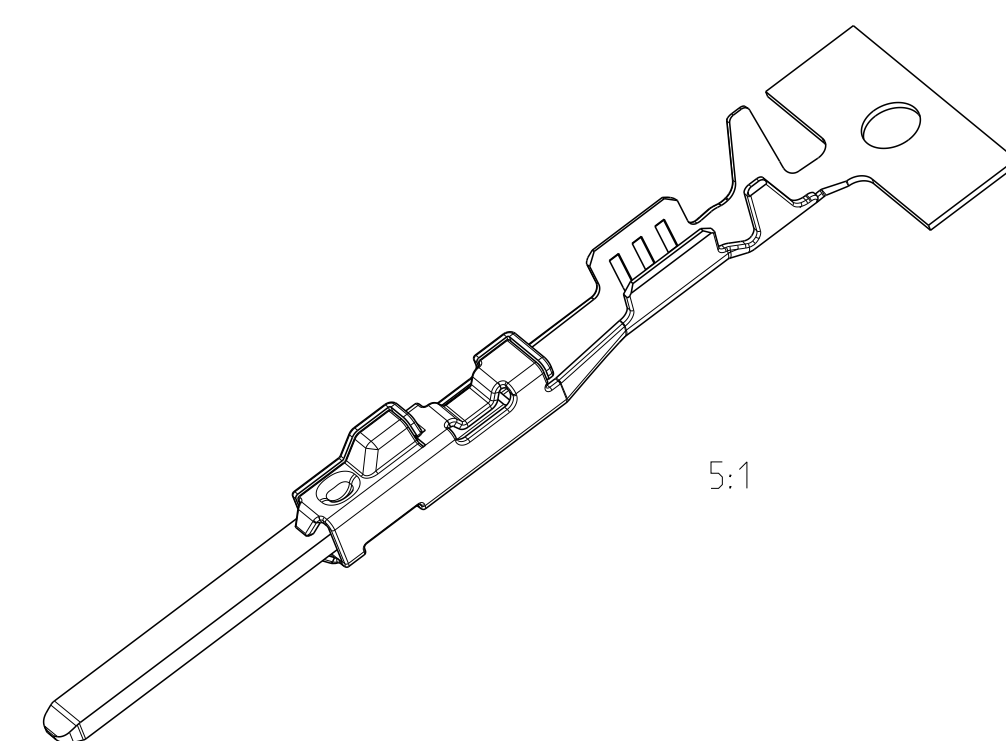
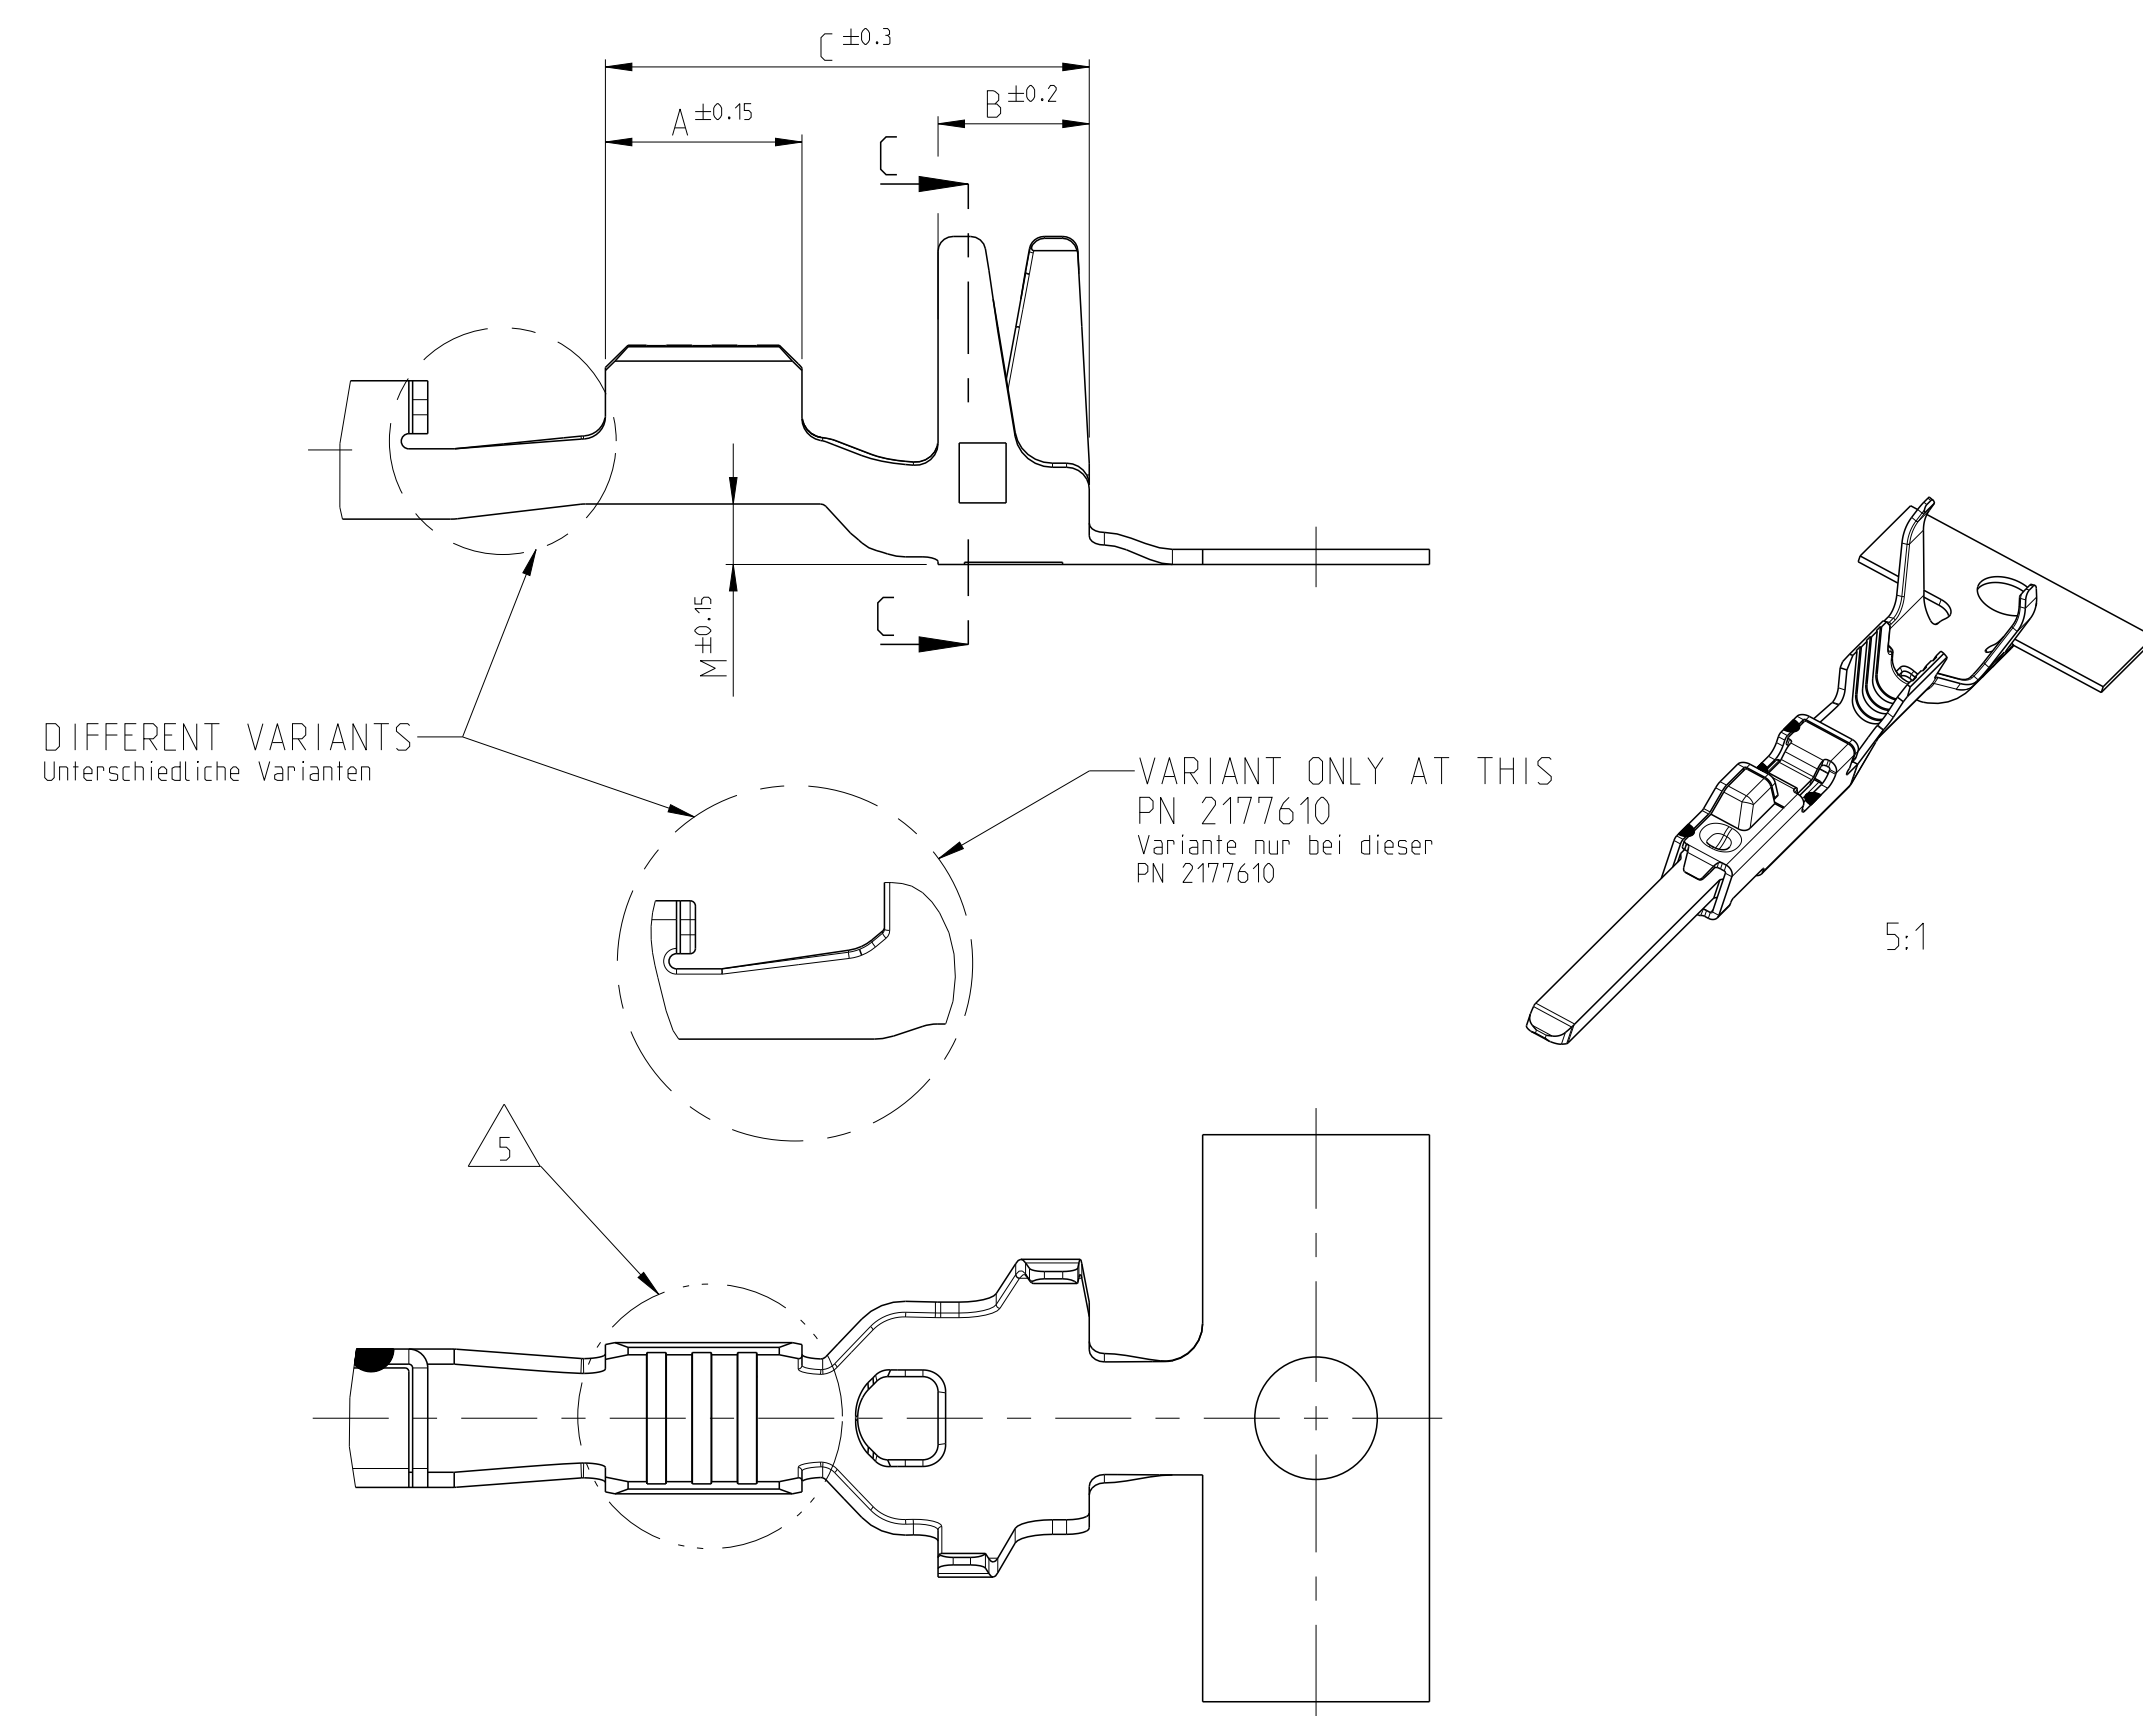
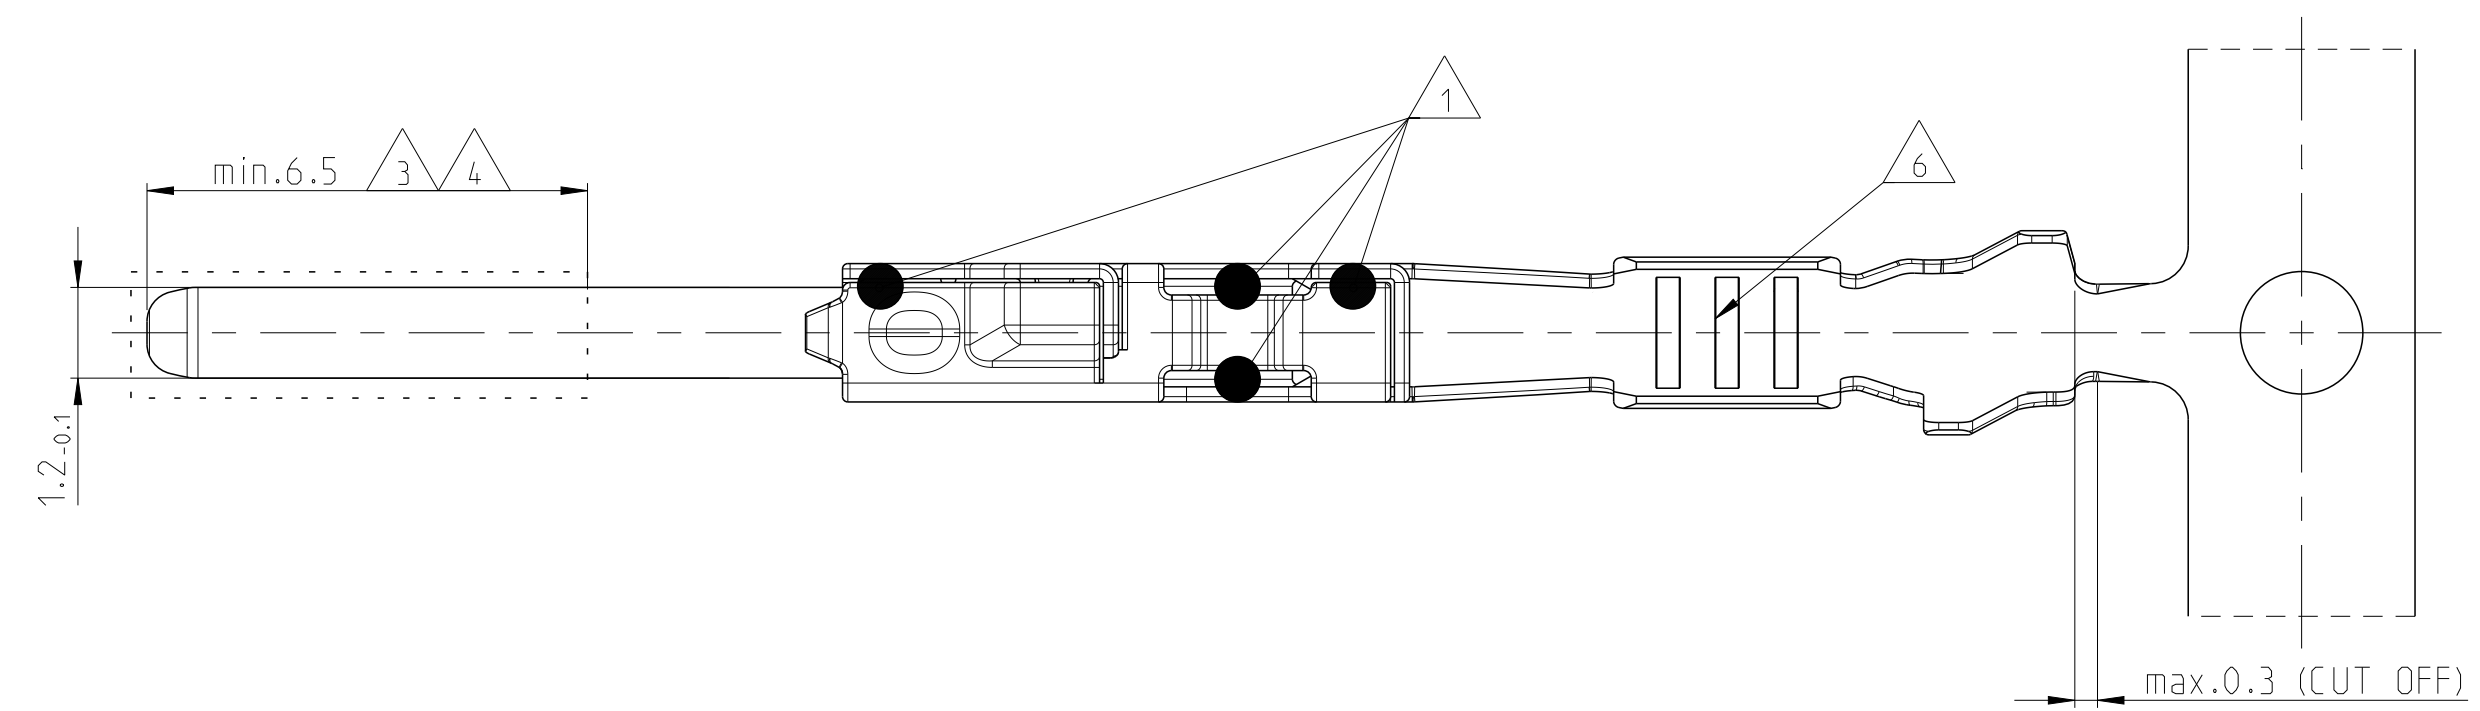


SINGLE WIRE SEALING SYSTEM
Einzelleiter- Dichtungs- System

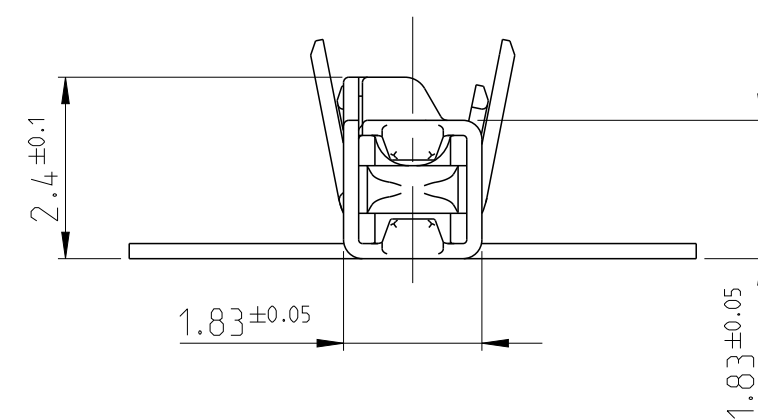

- | | |
|---|---|
| 1 | LASER WELDED
Lasergeschweisst |
| 2 | REVISION STATUS
Revisionsstand |
| 3 | CONTACT AREA TAB MIN. 0.8 µm SELECTIV GOLD OVER Ni
Kontaktzone selectiv vergoldet min.0.8µm ueber Ni |
| 4 | CONTACT AREA TAB MIN. 2.0 µm SELECTIV SILVER
Kontaktzone selectiv versilbert min.2.0µm |
| 5 | RETENTION FORCE INSERT TAB PUSHED INSIDE BODY MIN. 40N
Haltekraefte Inserttab in Body "gedrueckt" min. 40N |
| 6 | DIFFERENT FORM OF THE SERRATIONS AND WIRE-CRIMP POSSIBLE
unterschiedliche Ausfuehrung der Ritlen und des Draht-Crimps moeglich |
| 7 | SEE APPLICATION SPECIFICATION
siehe Verarbeitungsspezifikation |
- TE-SPEC. 114-18464

4805 (3/11)