

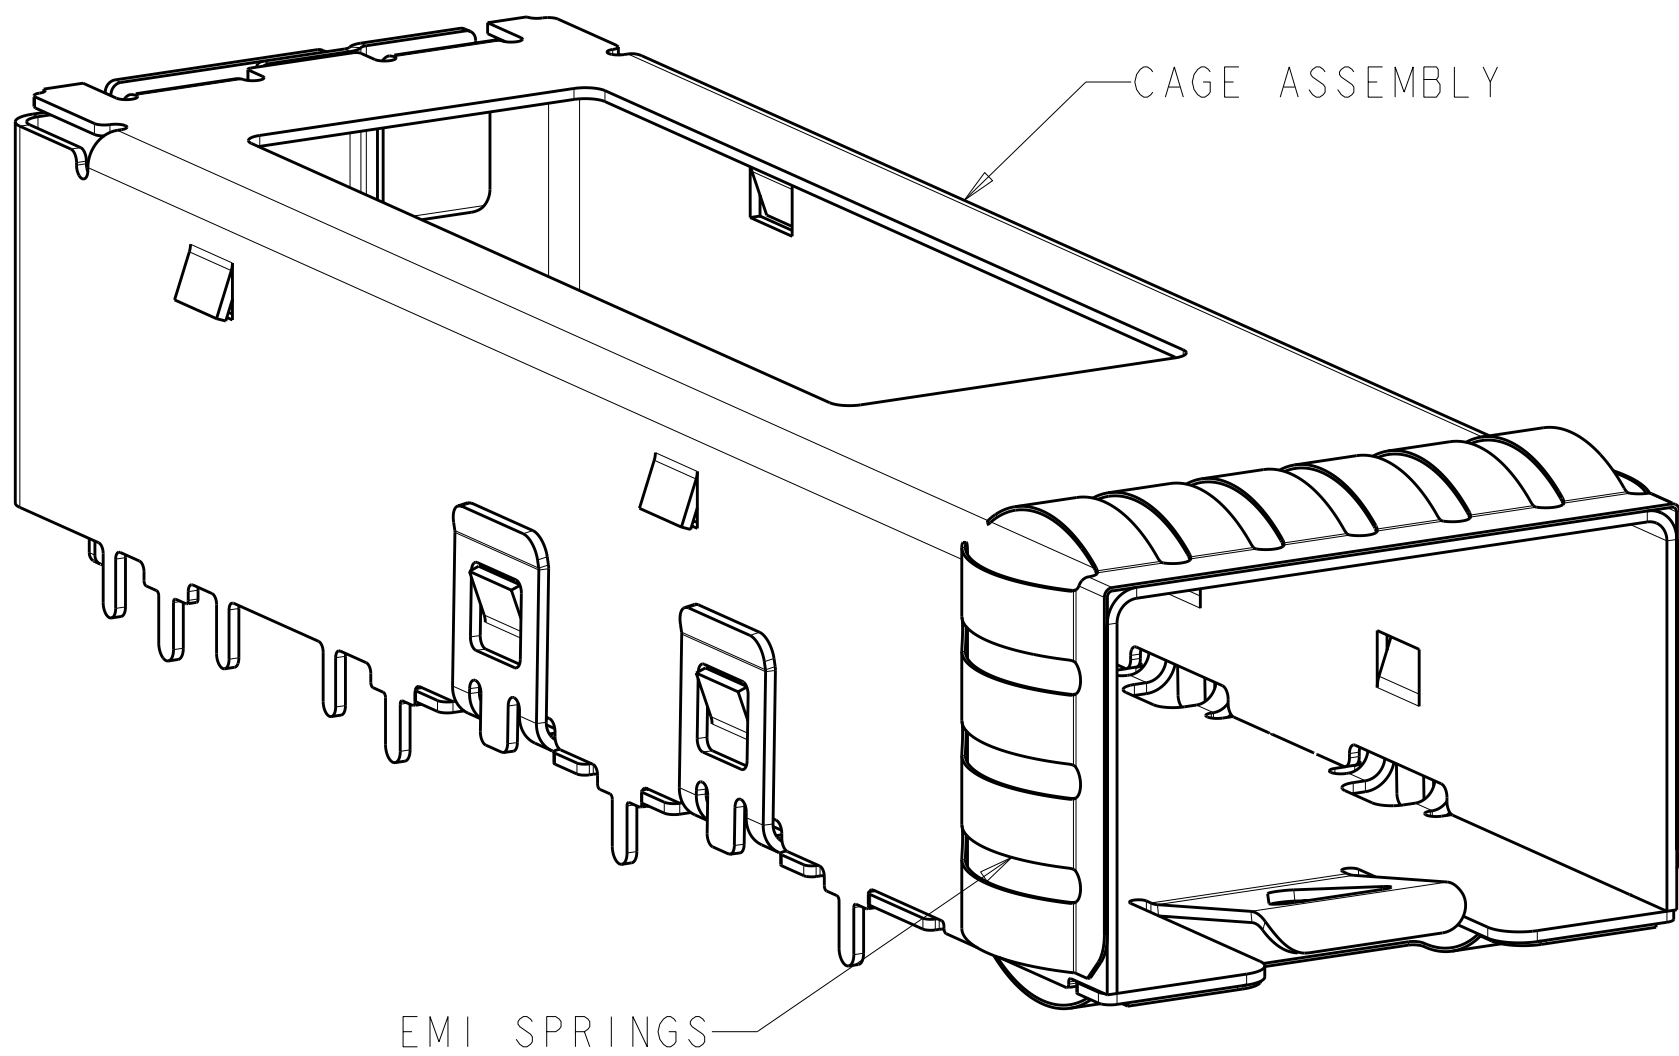
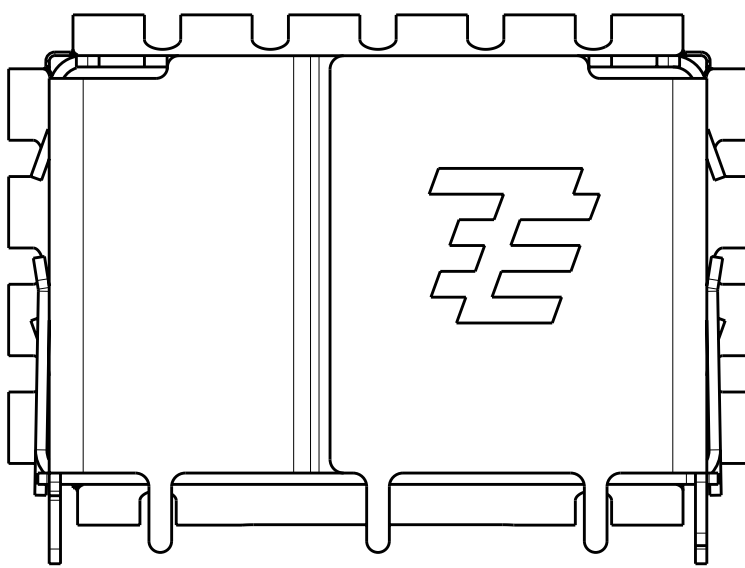
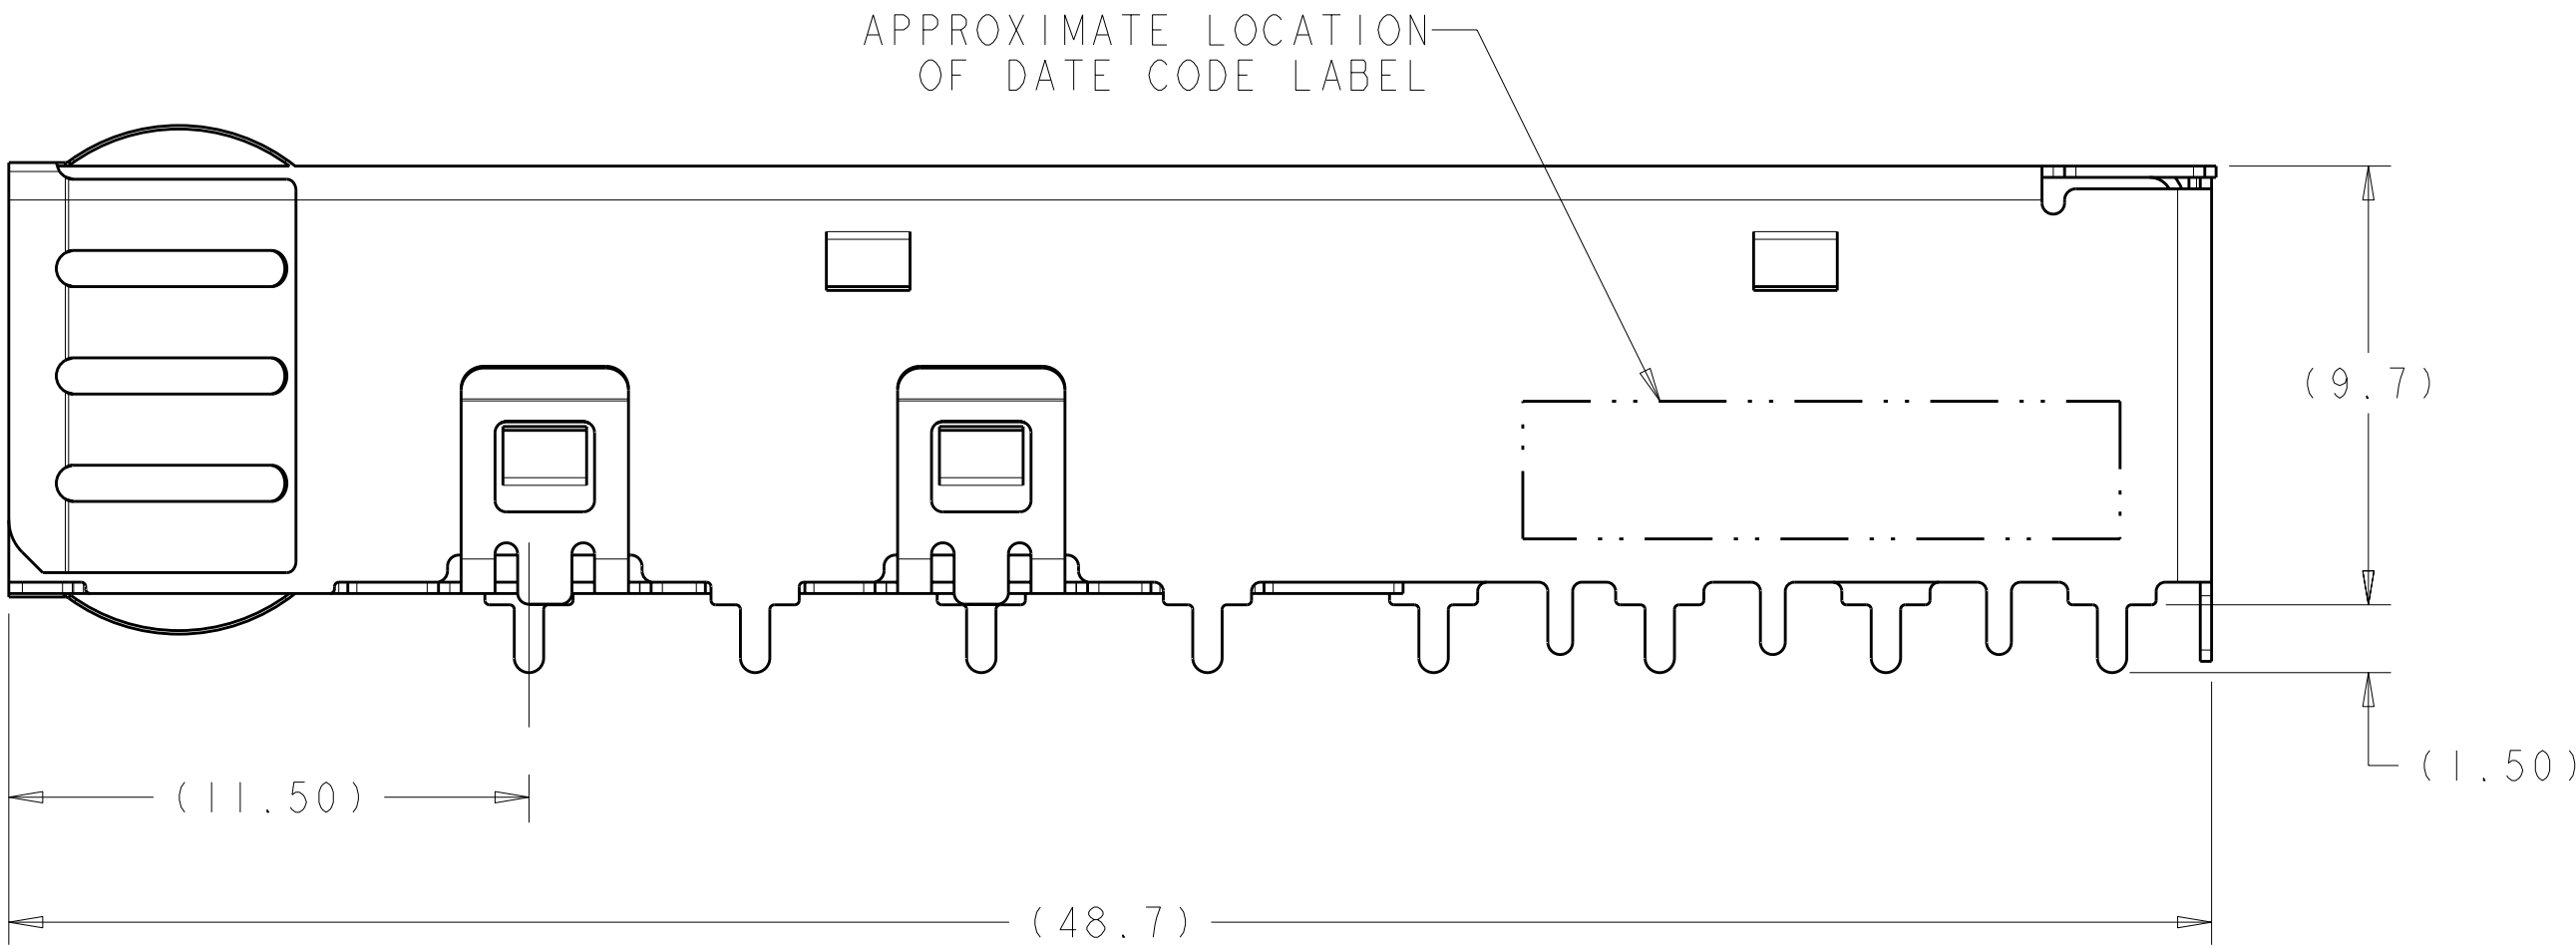


LOC		DIST		REVISIONS								
GP	00	P	LTR	DESCRIPTION			DATE	DWN	APVD			
				B	REVISED PER ECO-09-022874					200CT2009	CR	MS
				C	REVISED PER ECO-11-019224					16JAN2012	TX	AC

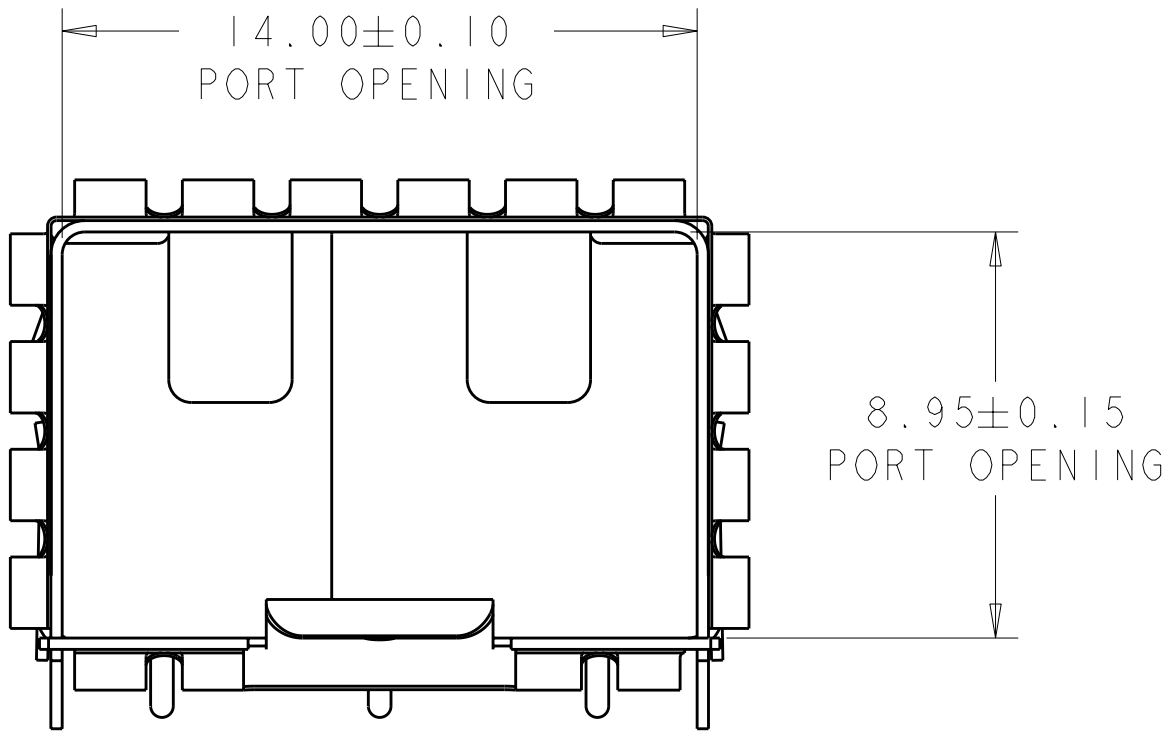


- 1 MATERIAL:
CAGE ASSEMBLY - NICKEL-SILVER ALLOY.
EMI SPRINGS - COPPER ALLOY.
- 2 FINISH:
EMI SPRINGS - 0.8um MIN MATTE TIN OVER 0.8um MIN NICKEL
NON PLATED EDGES PERMISSIBLE.
3. MATES WITH SFP MSA COMPLIANT TRANSCEIVERS.
- 4 PADS AND VIAS CHASSIS GROUND.
- 5 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
6. MINIMUM PC BOARD THICKNESS:
SINGLE SIDED = 1.50mm
7. REMOVED

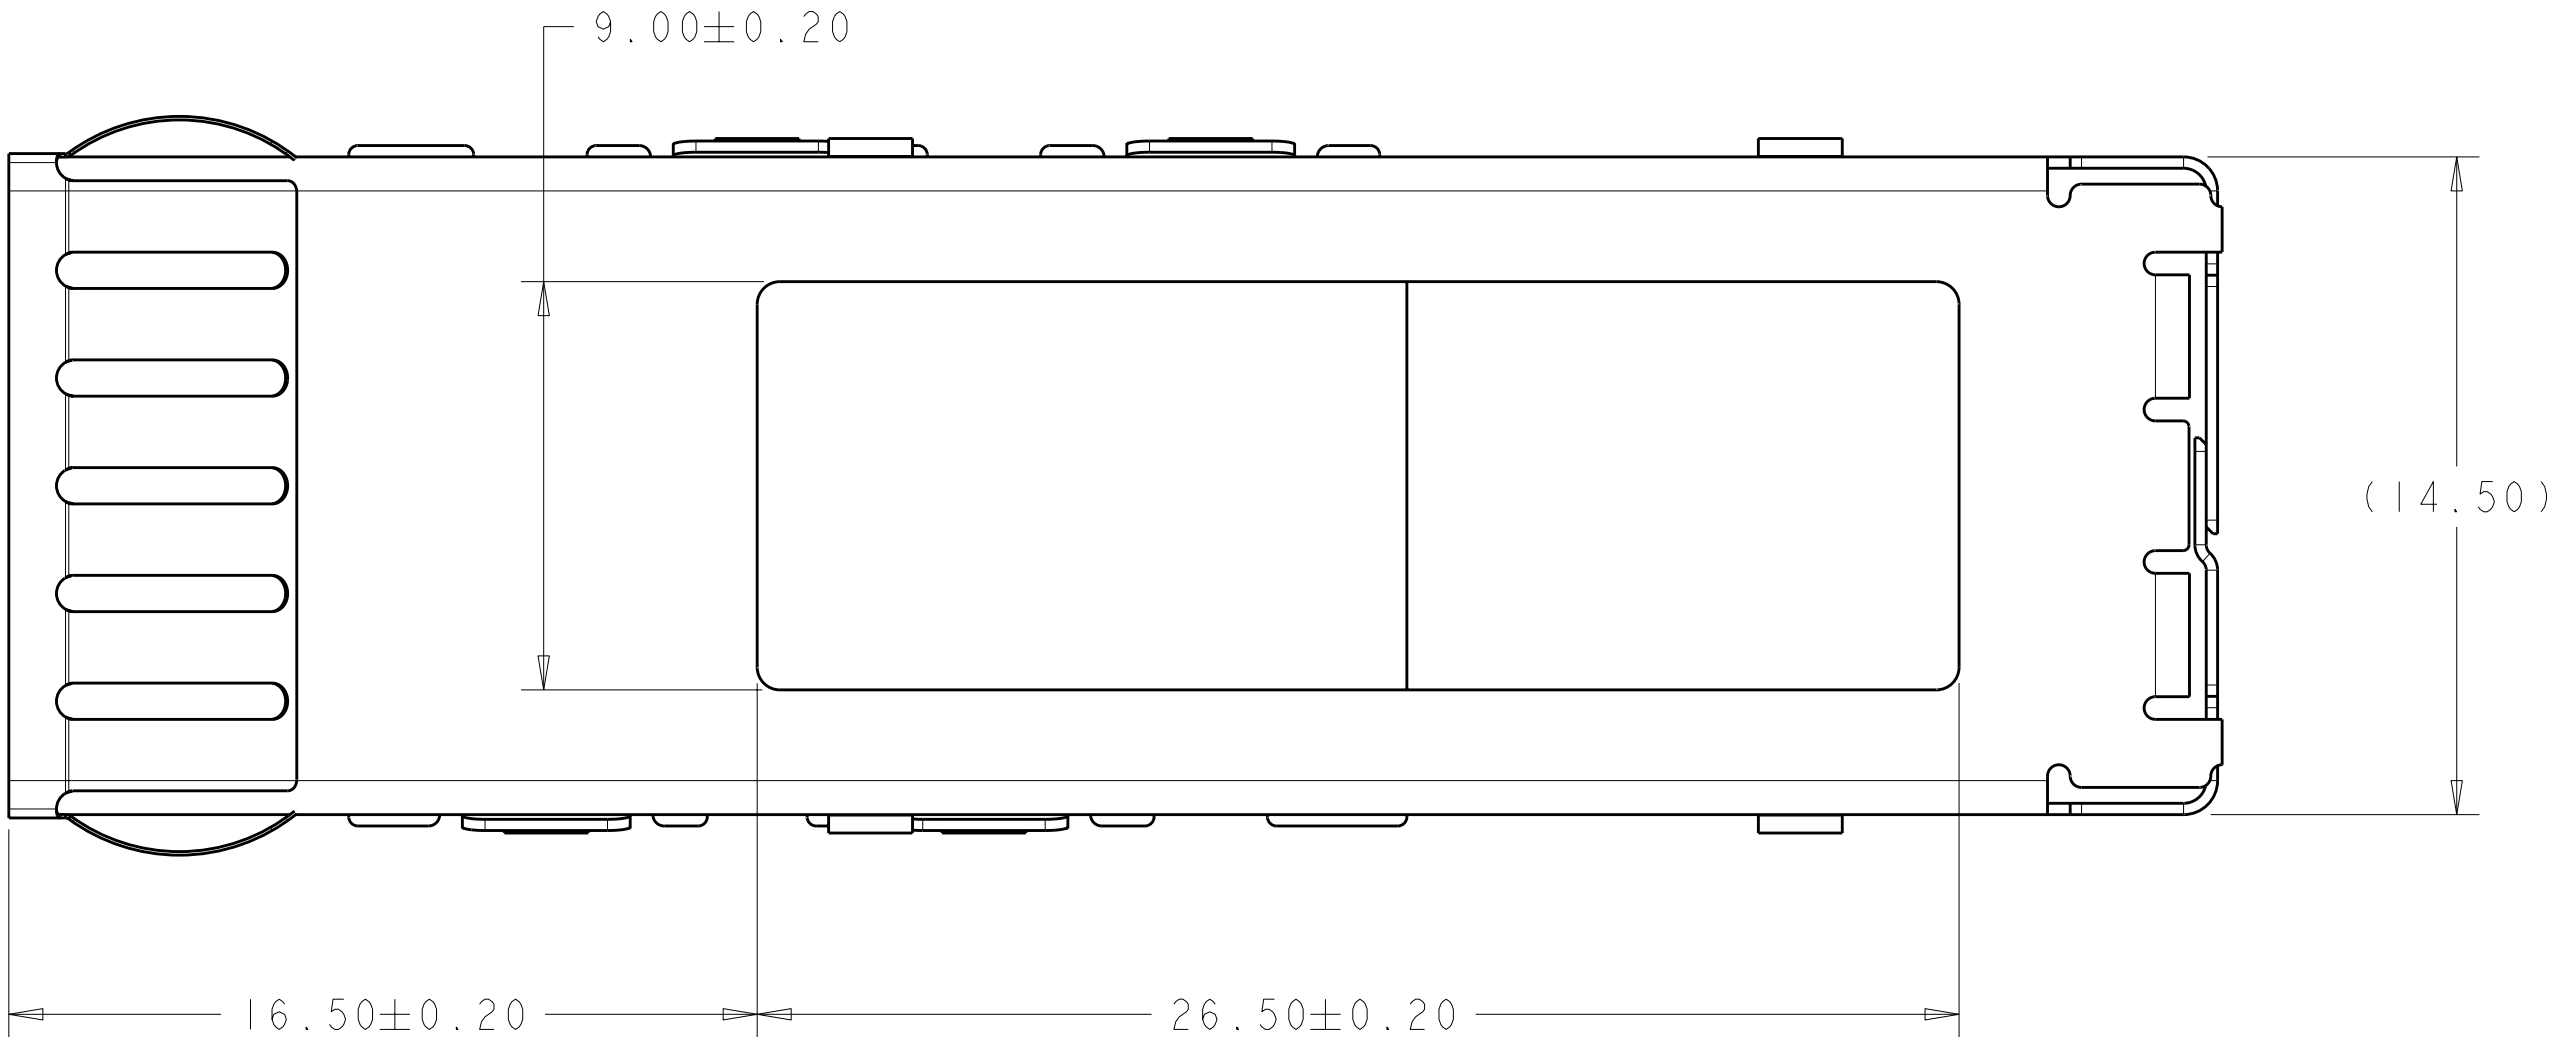

2057021-1
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	M. SCHMITT	21FEB2008	TE Connectivity		
		CHK	M. SCHMITT	21FEB2008			
		APVD	M. WALMSLEY	21FEB2008	NAME		
					SFP+ 1X1 CAGE ASSEMBLY W/ HEATSINK OPENING, SHORT SOLDER TAILS, EXTERNAL EMI SPRINGS		
					SIZE		
					A100779C=2057021		
					RESTRICTED TO		
					-		
					CUSTOMER DRAWING		
					SCALE 6:1 SHEET 1 OF 2 REV C		

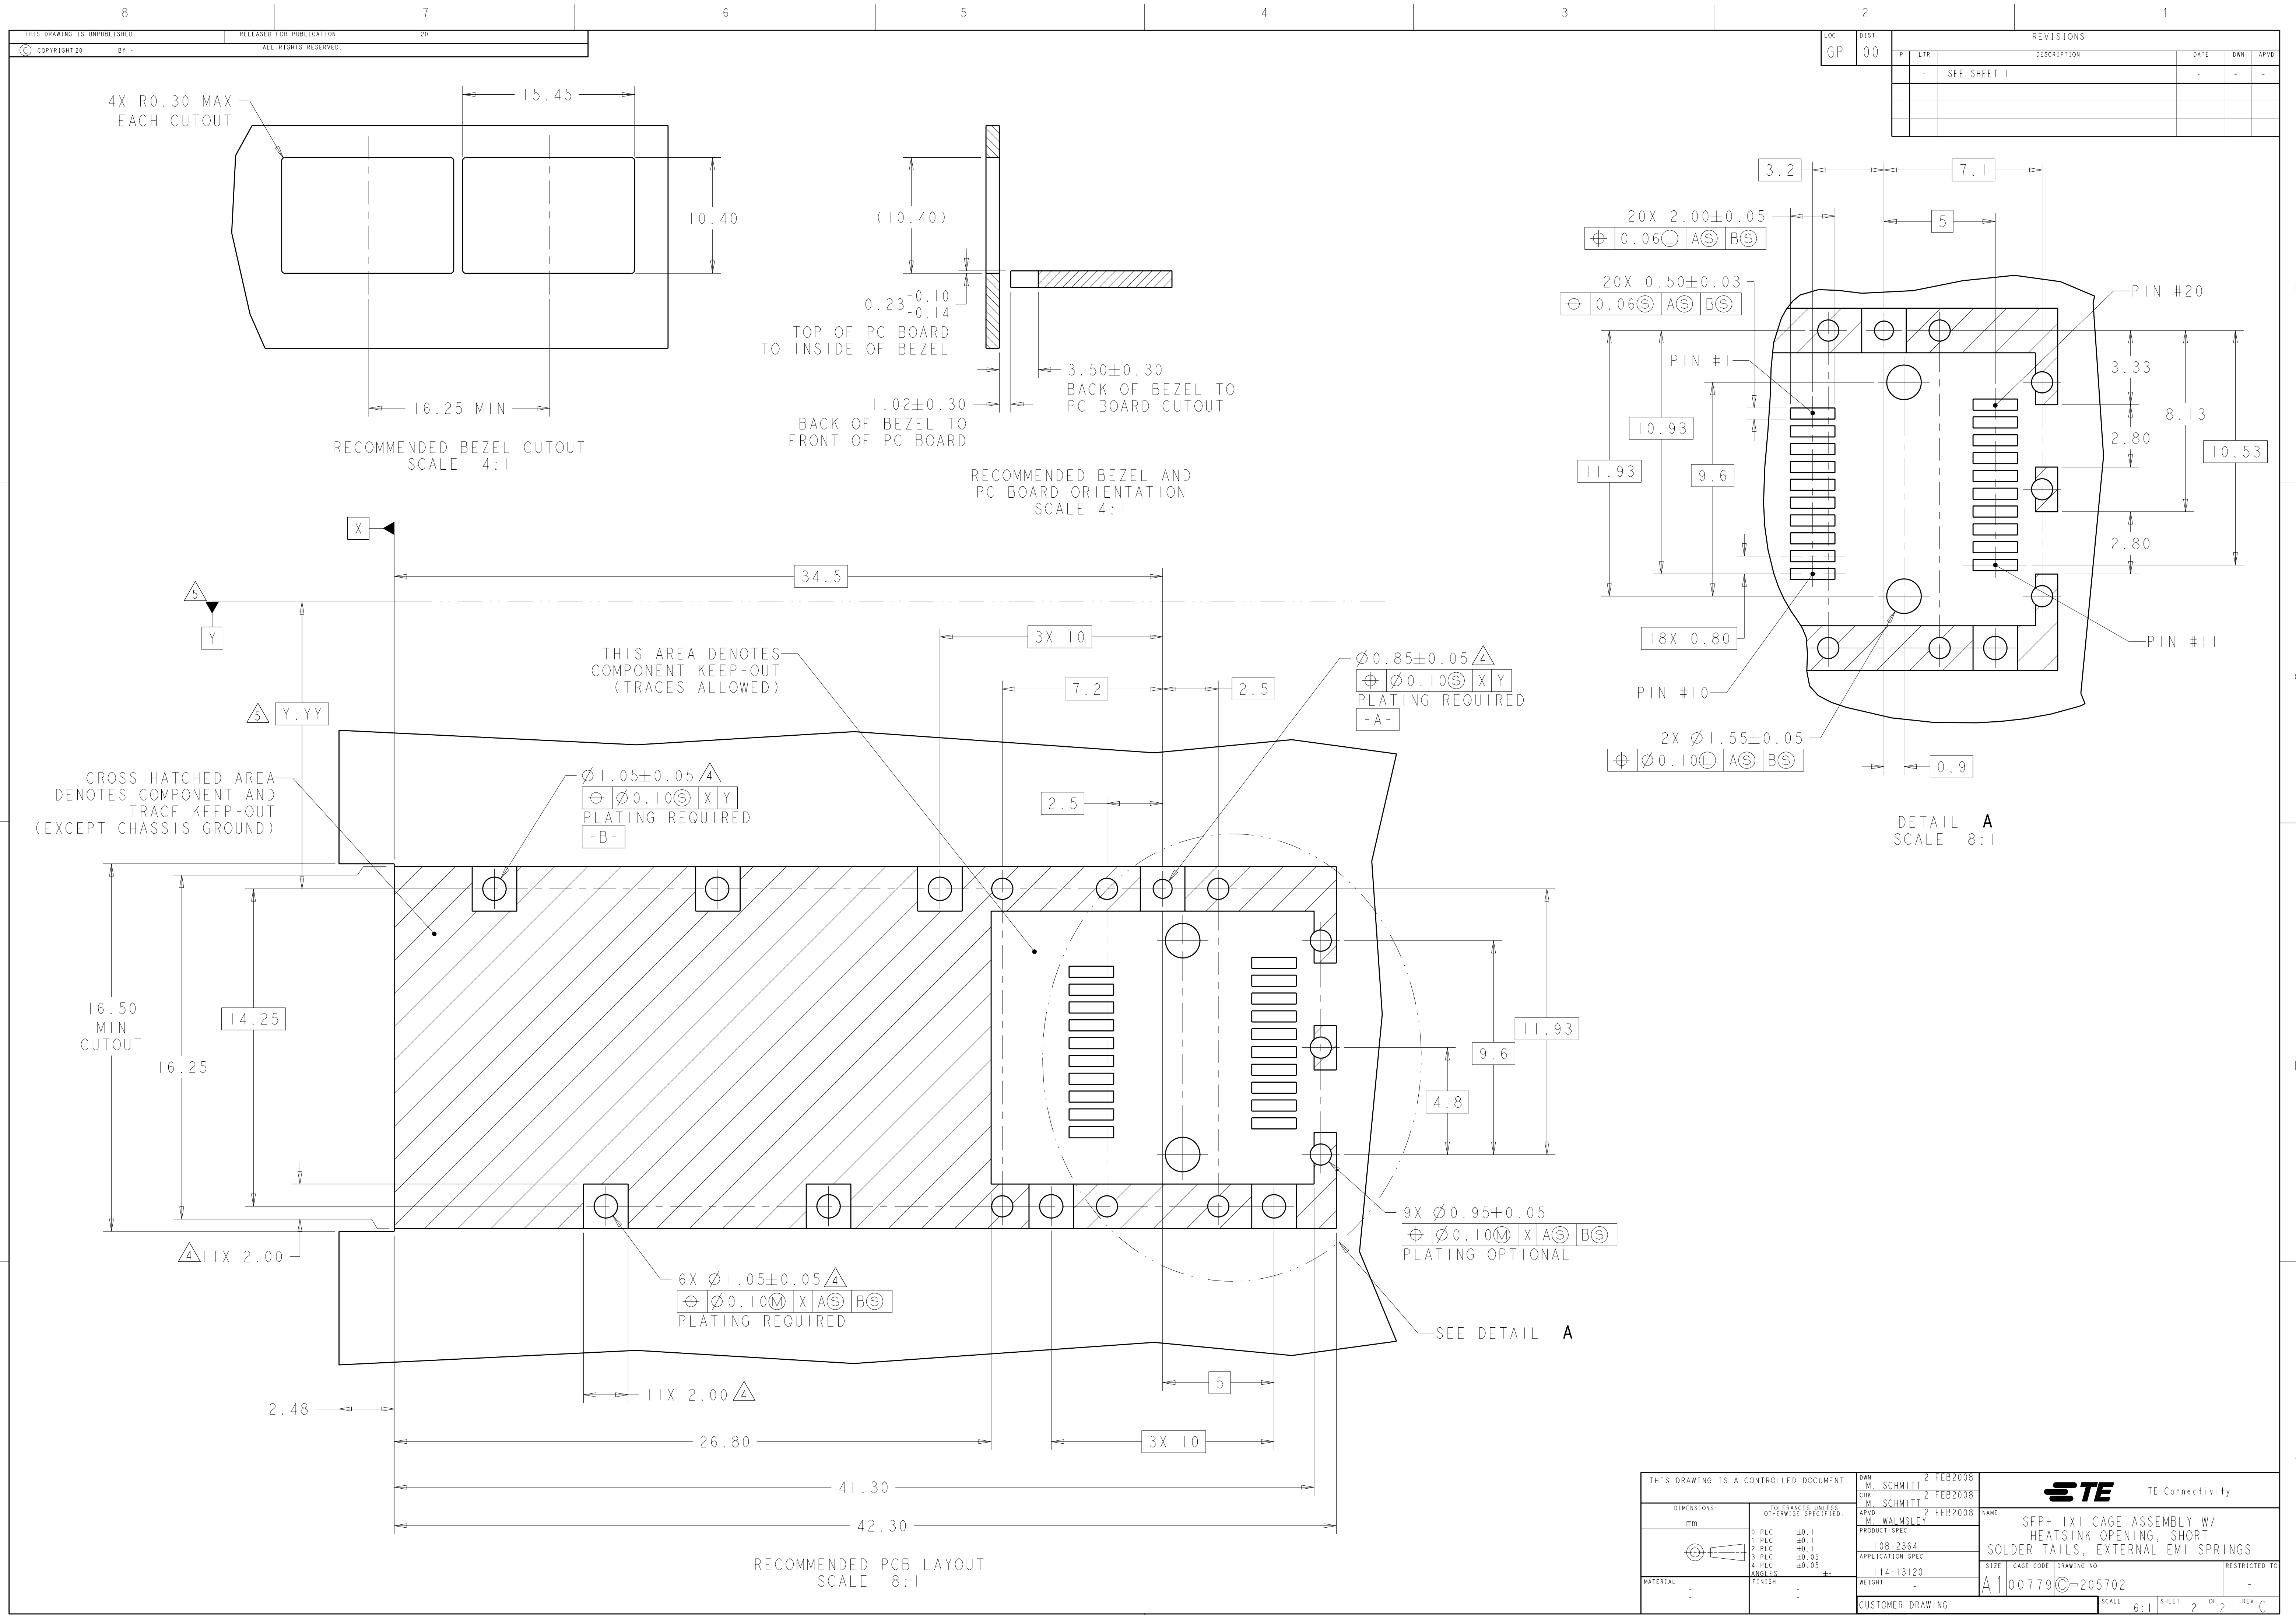

LOC		DIST		REVISONS			
GP	00	P	LYR	DESCRIPTION	DATE	DWN	APVD
				SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN	M. SCHMITT	21FEB2008	 TE Connectivity	
				CHK	M. SCHMITT	21FEB2008		
				APVD	M. WALMSLEY	21FEB2008	NAME	
				PRODUCT SPEC			SFP+ 1X1 CAGE ASSEMBLY W/	
				APPLICATION SPEC			HEATSINK OPENING, SHORT	
				114-13120			SOLDER TAILS, EXTERNAL EMI SPRINGS	
				WEIGHT			SIZE CAGE CODE DRAWING NO	
				CUSTOMER DRAWING			A100779C=2057021	
							RESTRICTED TO	
							SCALE 6:1 SHEET 2 OF 2 REV C	