



LOC	DIST	REVISIONS					
FX	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			I	FIRST DRAFT	16MAY2012	MBH	MDB
			A	RELEASED PER ECO-13-000735	14JAN2013	DLD	MDB
			AI	REVISED PER ECO-13-005998	05APR2013	DLD	SLM



SCALE 5:1

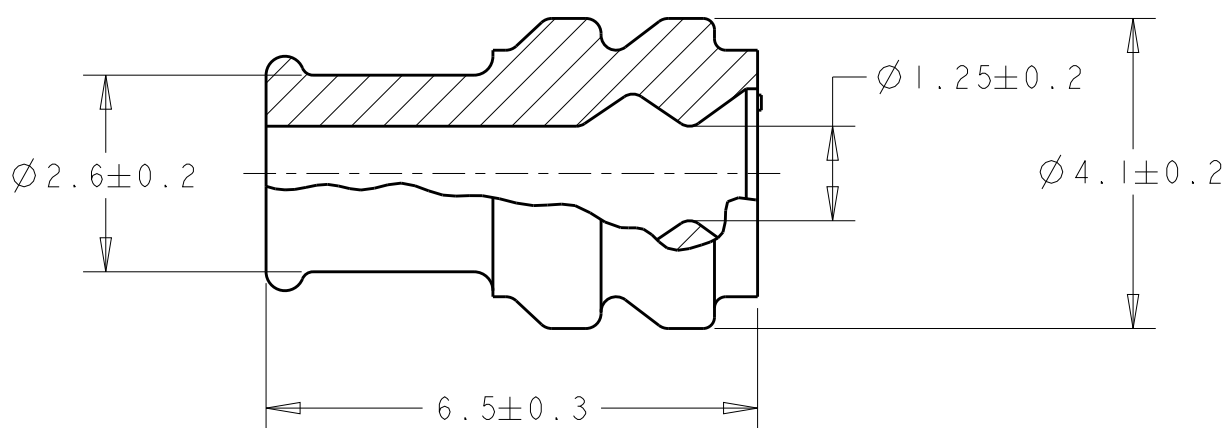

- FOR INSULATION $\varnothing 1.4$ TO $\varnothing 1.8$ mm.
- PARTS MUST BE THOROUGHLY MIXED TO ASSURE PROPER COATING OF APPLIED LUBRICANT PRIOR TO APPLICATION.
- MATERIAL: VAMAC
COLOR: BLACK
- INSULATION CRIMP MEASUREMENTS ARE DEPENDENT ON WIRE INSULATION TYPE AND OUTSIDE DIAMETER. INSULATION CRIMP MUST BE SUFFICIENT TO KEEP SEAL FROM SLIDING OUT OF CRIMP WHEN INSERTING INTO CONNECTOR CAVITY BUT NOT TEAR THE SEAL.

2138898-1

PART NO.

DIMENSIONS:		DWN	16MAY2012	MATERIAL	-	FINISH	-
mm		M. HITCHCOCK					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	16MAY2012				
		M.D. BROWN					
		APVD	16MAY2012				
		M.D. BROWN		TE TE Connectivity			
0 PLC ±-		PRODUCT SPEC					
1 PLC ±-		-		NAME MCON CABLE SEAL, 50 DURO-METER SILO 3.45 - 3.70mm DIAMETER			
2 PLC ±-		APPLICATION SPEC					
3 PLC ±-		-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
4 PLC ±-		WEIGHT	-	A4	00779	C-2138898	-
ANGLES ±°		Customer Drawing					
		SCALE 10:1		SHEET 1 OF 1		REV AI	