





LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	INITIAL RELEASE	06DEC2017	AJ	SH

D

C

B

A

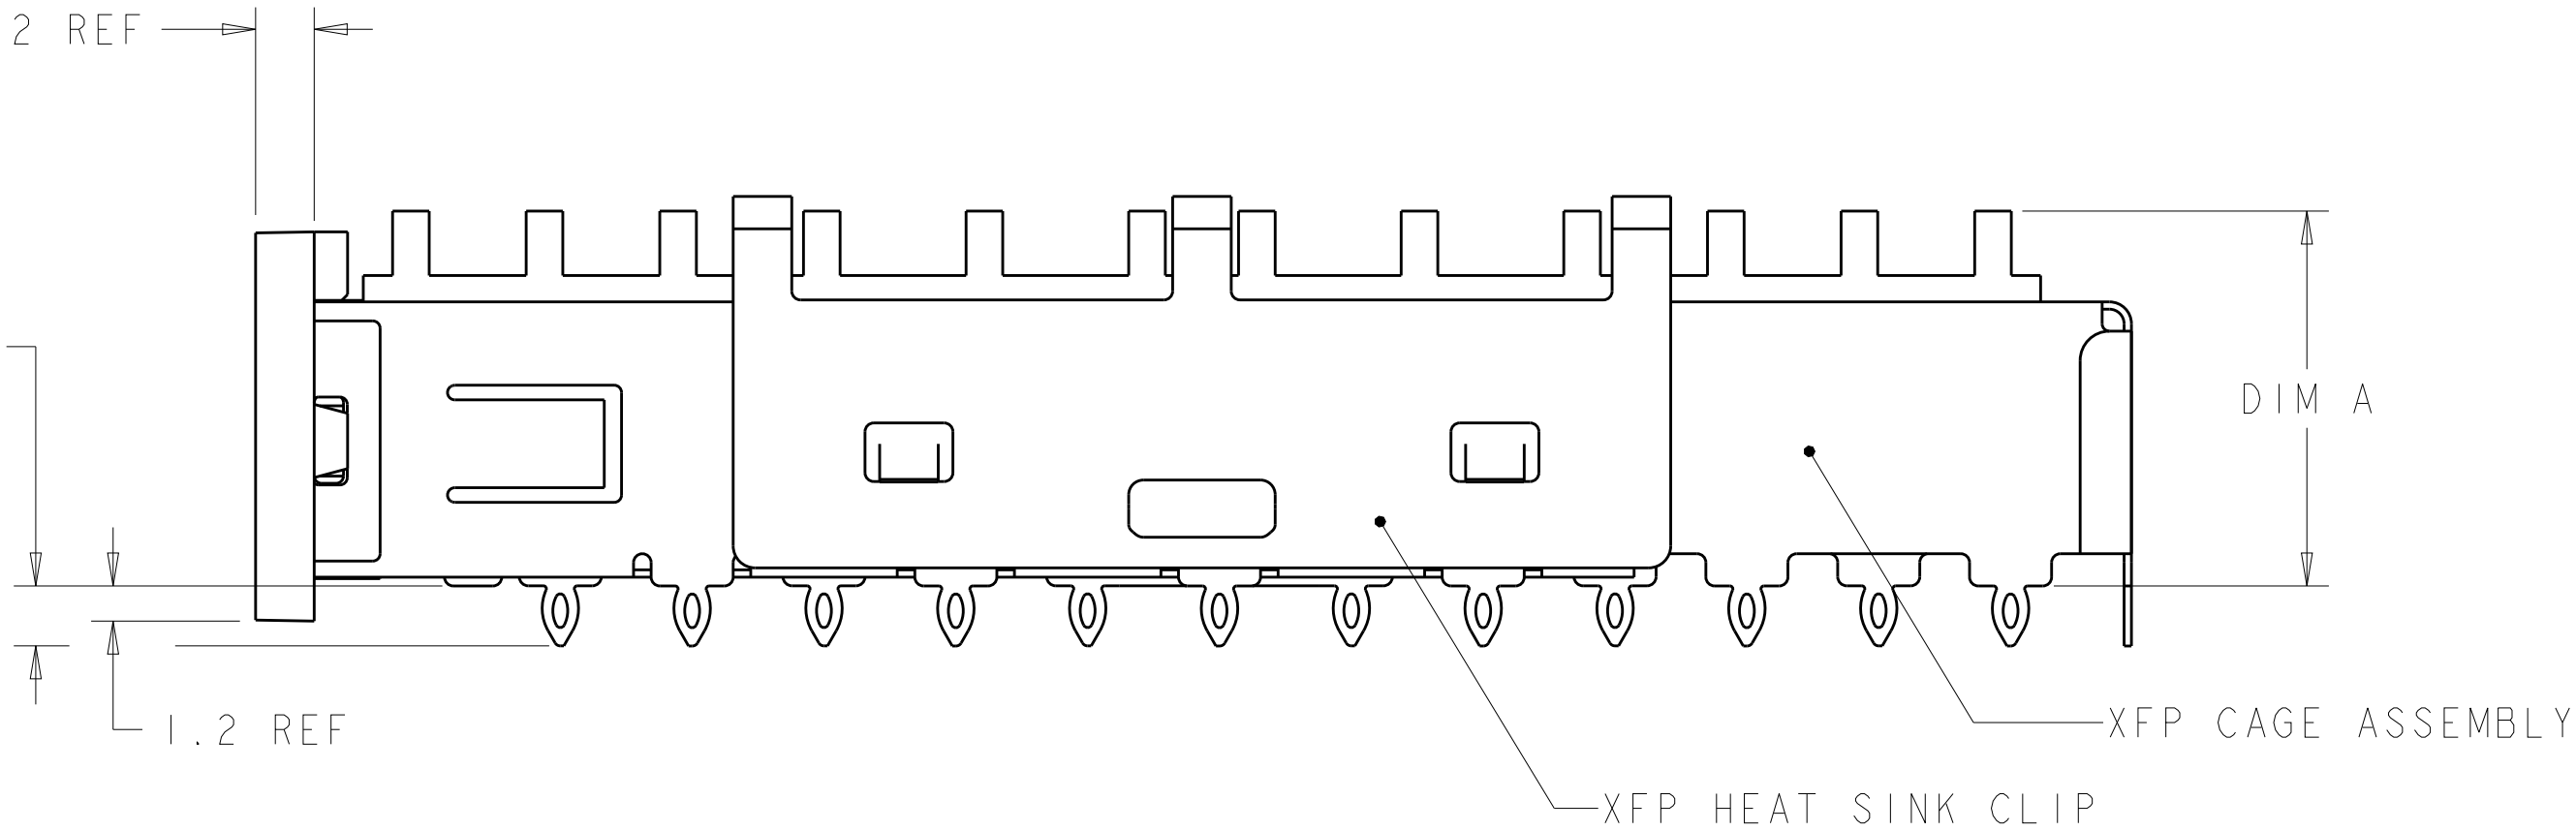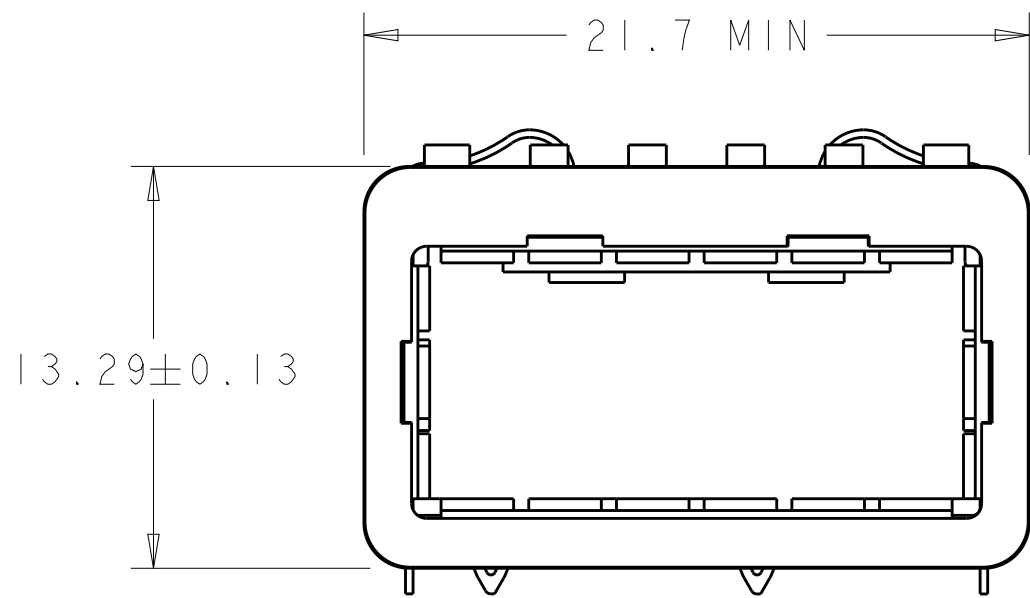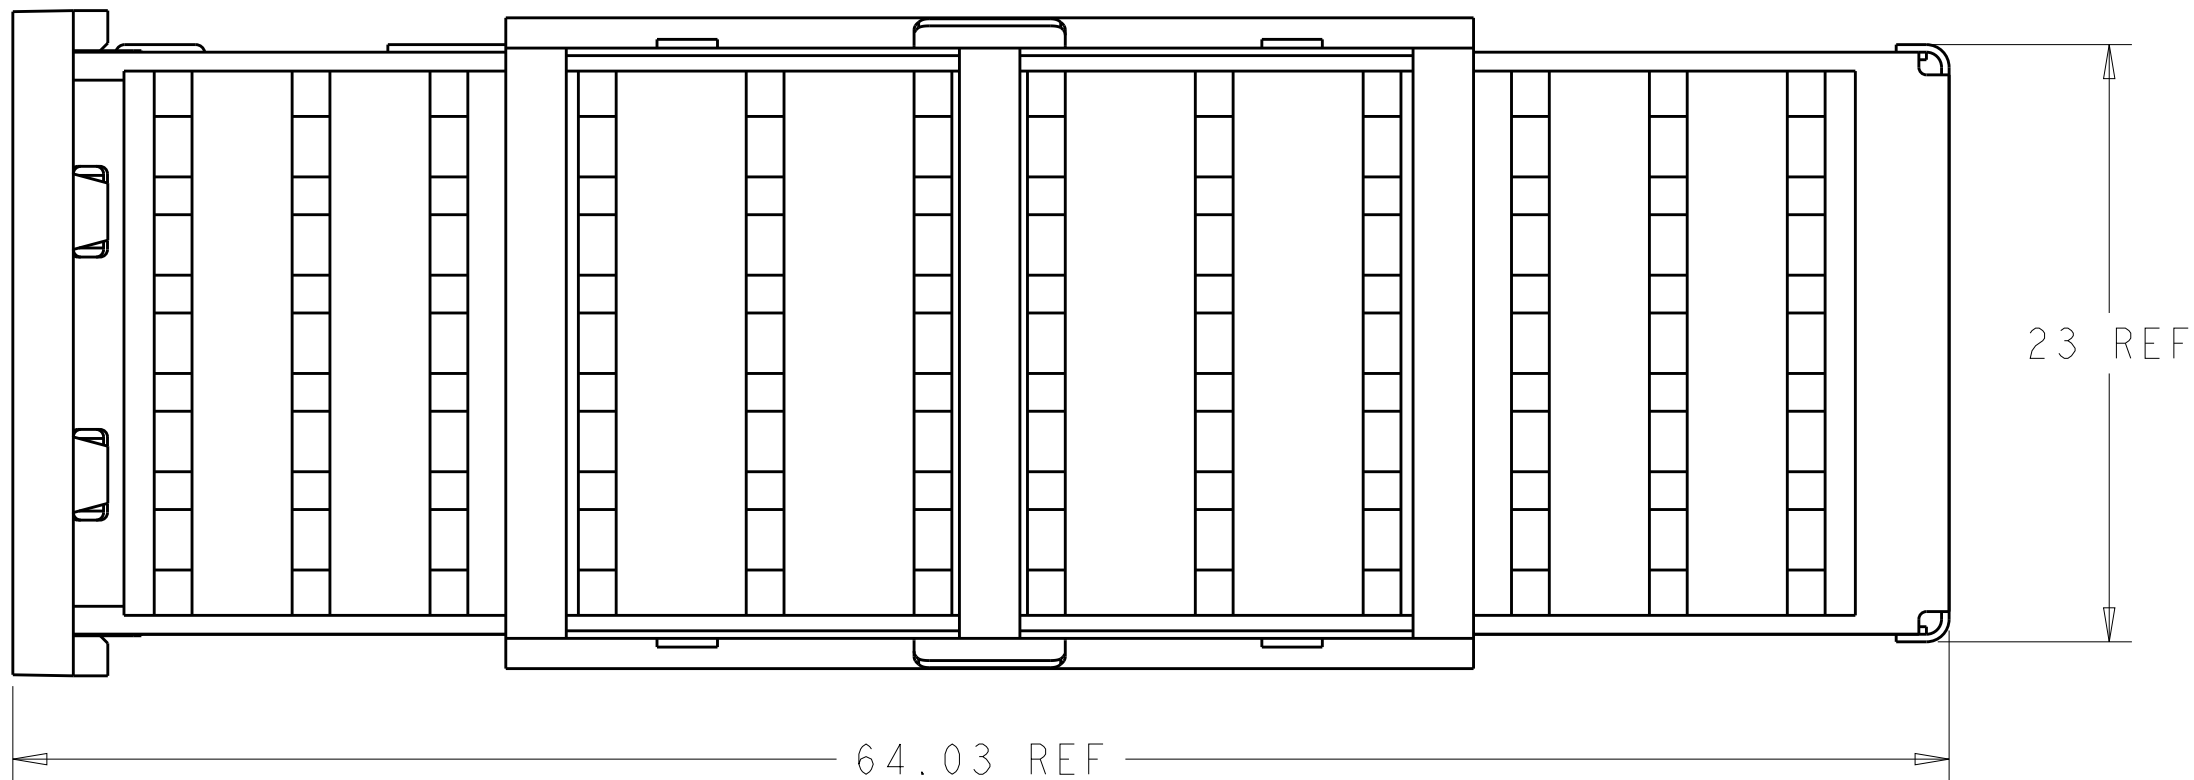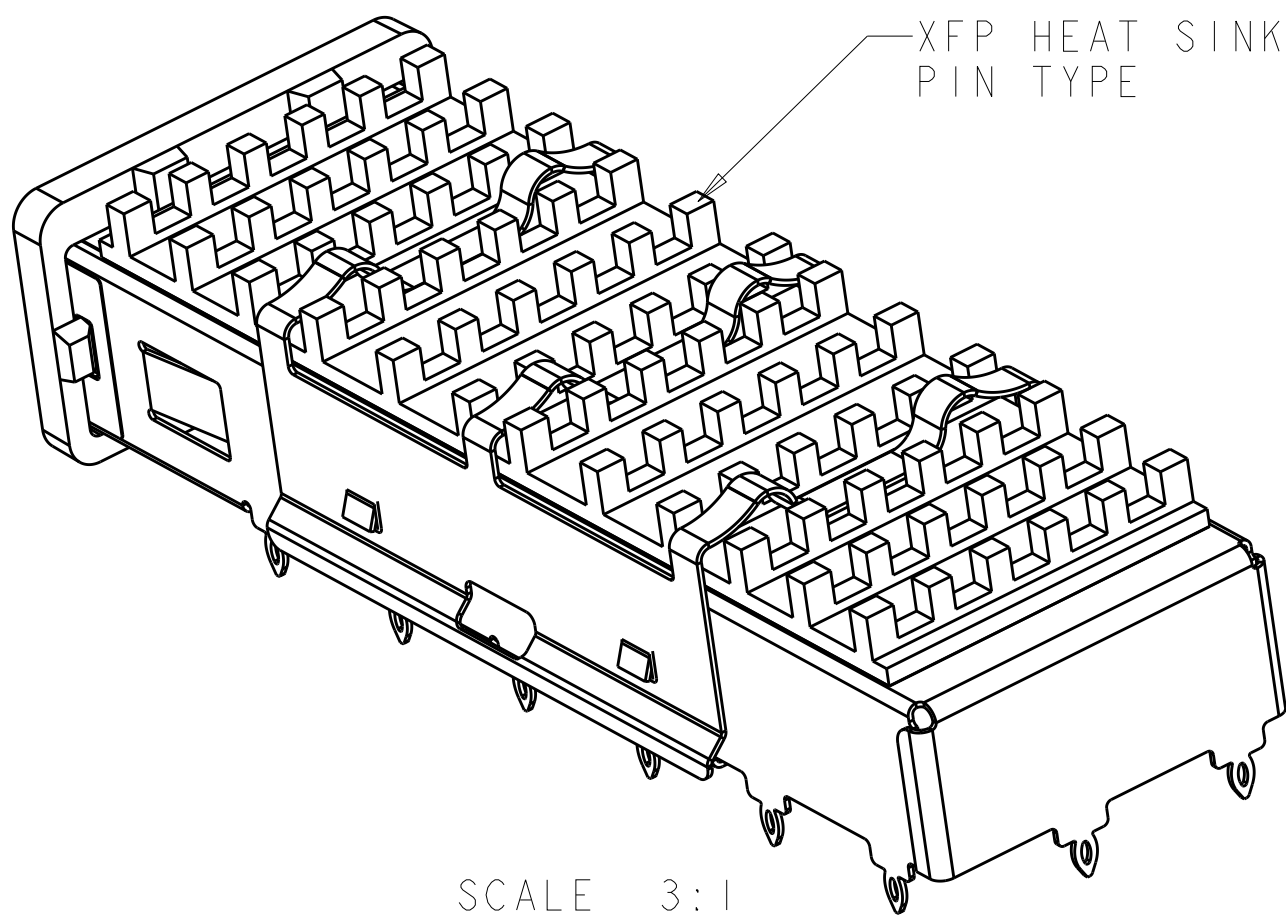

- 1 MATES WITH XFP-MSA COMPLIANT TRANSCEIVERS.
- 2 DATUM **-X-** AND **-Y-** ESTABLISHED BY CUSTOMER.
- 3 DATUM **-A-** IS TOP SURFACE OF HOST BOARD.
- 4 INDICATED SURFACES TO BE CONDUCTIVE AND CONNECTED TO CHASSIS GROUND.
5. SEE COMPONENT DRAWINGS FOR COMPONENT DIMENSIONS AND INFORMATION.

22.9	1542706-3	1489948-2	2303074-1	NET WORKING	2303075-3
15.8	1542618-2	1489948-2	2303074-1	SAN	2303075-2
13.6	1542656-4	1489948-2	2303074-1	PCI	2303075-1
A MAX	HEAT SINK PART NUMBER	HEATSINK CLIP PART NUMBER	CAGE ASSY PART NUMBER	APPLICATION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 18APR2016 CHK 18APR2016 APVD 18APR2016	TE Connectivity		
DIMENSIONS: mm		PRODUCT SPEC 108-2127	NAME XFP CAGE ASSEMBLY FRONT EMI SPRING W HEAT SINK 10 GIGABIT		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±.01 2 PLC ±.001 3 PLC ±.0001 4 PLC ANGLES ±.0001 FINISH		APPLICATION SPEC 114-13096	SIZE A200779	CAGE CODE C-2303075	RESTRICTED TO -
MATERIAL -		WEIGHT -	CUSTOMER DRAWING		
		SCALE 4:1	SHEET 1	OF 3	REV A

