


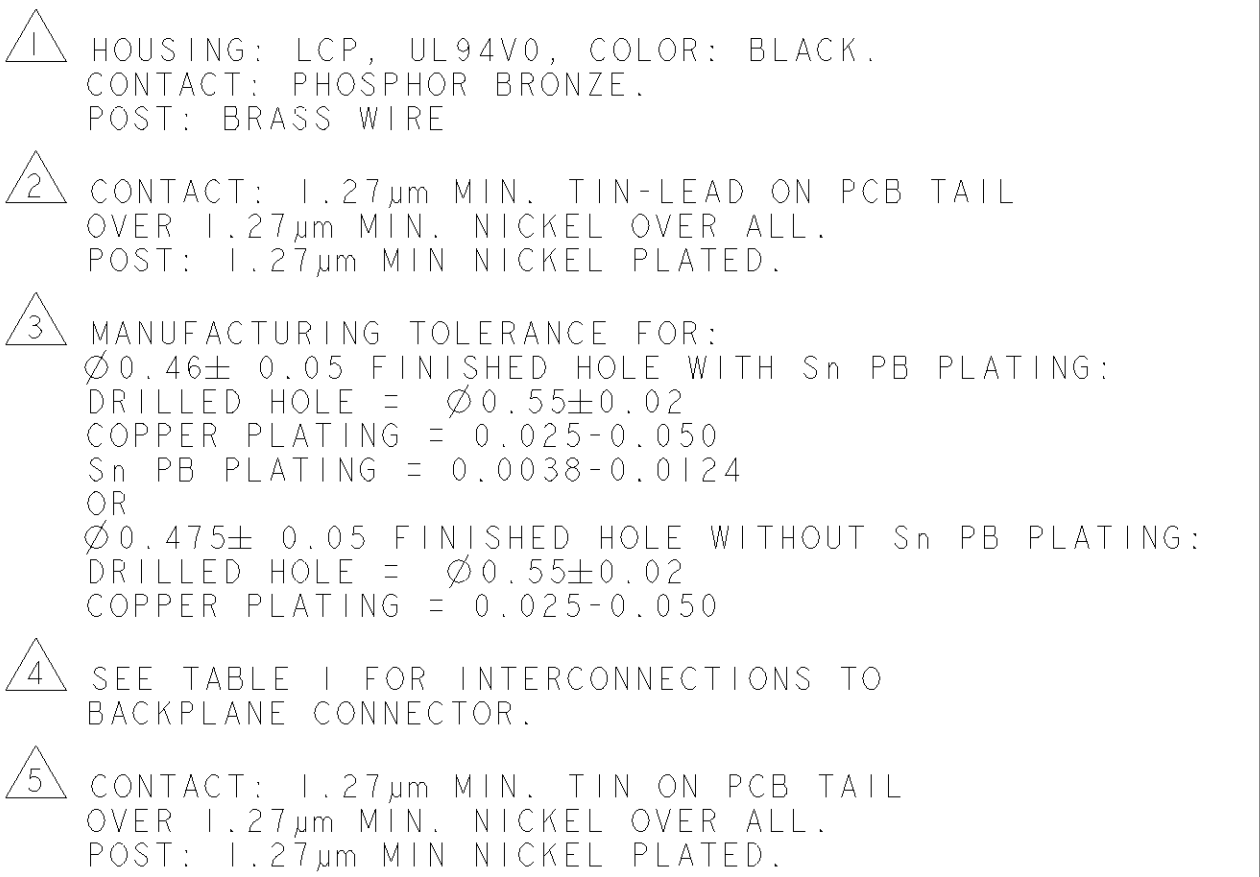

TYPICAL INTERCONNECTIONS FOR
EACH ODD-NUMBERED
COLUMN (WAFER): 1,3,5,7,9,11,13,15

TYPICAL INTERCONNECTIONS FOR EACH EVEN-NUMBERED COLUMN (WAFER: 2, 4, 6, 8, 10, 12, 14, 16)		
CONTACT USAGE	DAUGHTERCARD CONNECTOR PIN	BACKPLANE CONNECTOR PIN
SIGNAL PAIR	c x	b x
	d x	c x
SIGNAL PAIR	g x	e x
	h x	f x
SIGNAL PAIR	k x	h x
	l x	i x
SIGNAL PAIR	o x	k x
	p x	l x
GROUND(S)	ax, bx, ex, fx, ix, jx, mx, nx (ALL COMMONED)	ax, dx, gx, jx

[illegible]

DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.5 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ±1°		DWG. <u>S1PE</u> 03SEP2002 CHG. <u>03SEP2002</u> APPR. <u>C. GRIFFITH</u> 13MAR2006		tyco <i>Electronics</i> Tyco Electronics Harrisburg, PA 17105-3608	
MATERIAL:  SEE TABLE		FINISH:		NAME: RIGHT-ANGLE PLUG ASSEMBLY, LEFT END, 25.4mm, MultiGig RT2, DIFFERENTIAL, DAUGHTERCARD CONNECTOR		SIZE CASE CODE DRAWING NO. A 00779 C=1410124	
WEIGHT: -		CUSTOMER DRAWING		SCALE: 6:1		SHEET 1 OF 1 REV A	