

Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.













FIG. 1 PLUG MATED FIGURE(1:1)

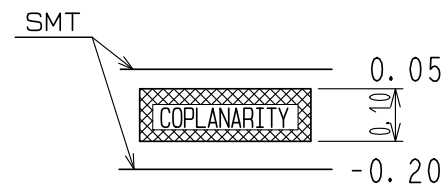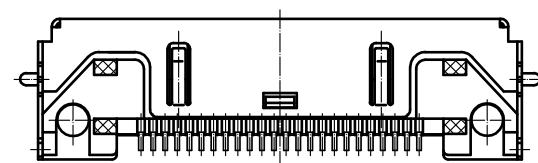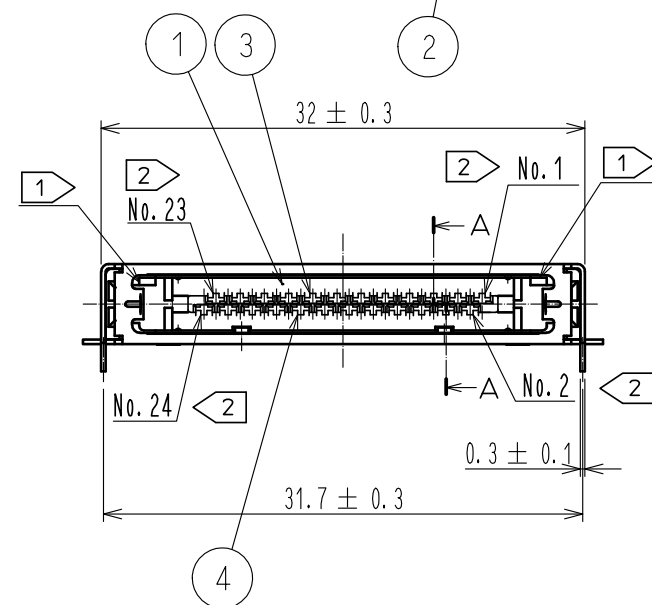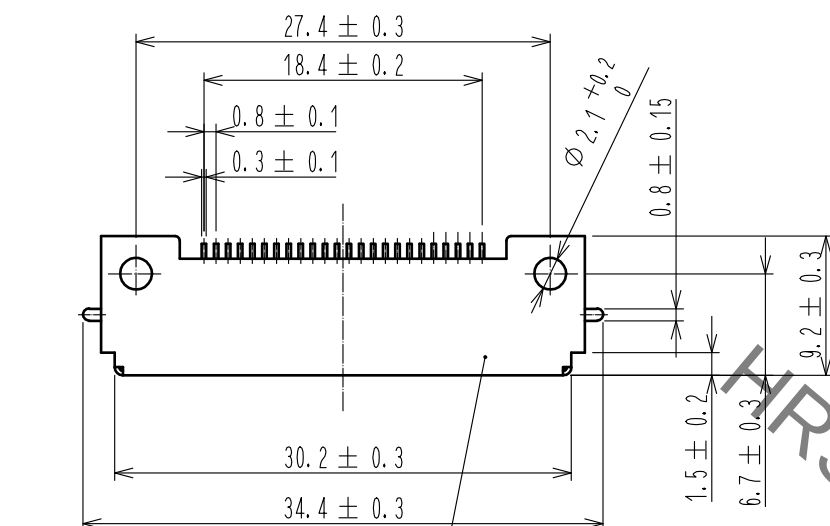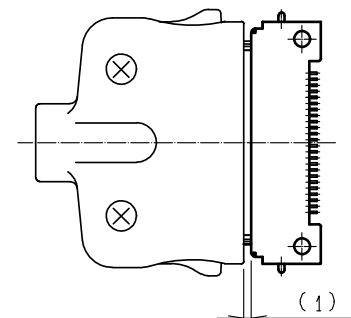

RECOMMENDED PC BOARD PATTERN [REFERENCE](2:1)
APPLICABLE PC BOARD $t=0.8 \sim 1.6$

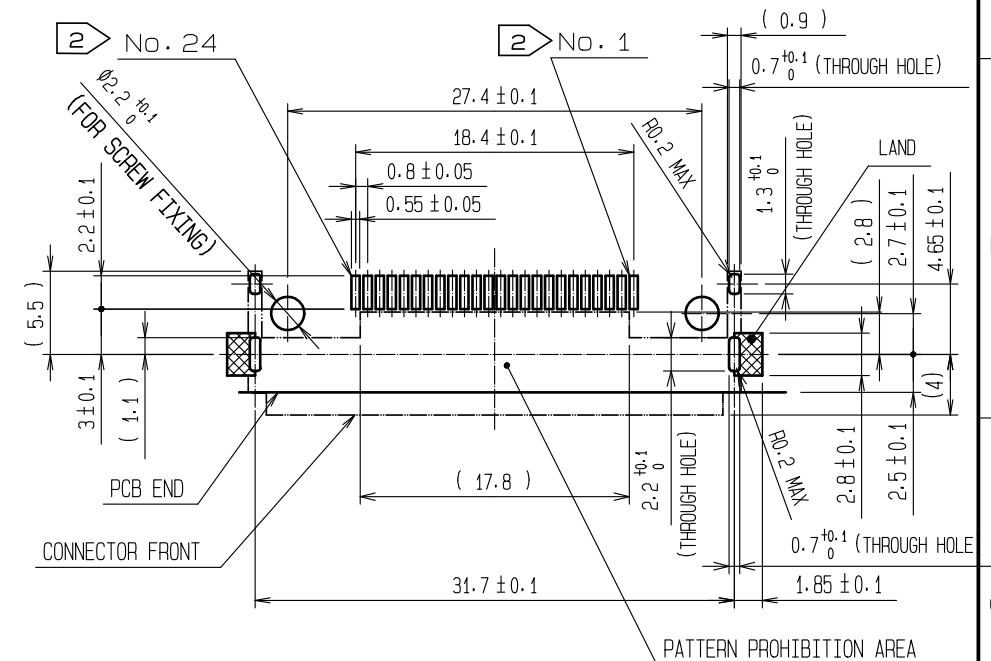

PANEL CUTOUT(1:1)
(PANEL THICKNESS $t=1.5$ mm MAX)

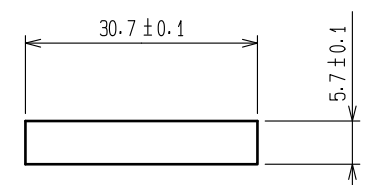


- NOTES
- 1 LOGO MARK SIDE DIRECTION AFTER PLUG MATING SHALL BE AS SHOWN IN FIG. 1
 - 2 CONTACT No. ARRANGEMENT SHALL BE AS SHOWN IN THE FIGURE.
 - 3 SMT LEAD DIMENSION FOR CONTACT (REF No. ③ ④) AND SHELL (REF No. ②) SHALL BE AS SHOWN IN THE FIG. 2


2	STAINLESS STEEL	TIN PLATING 1μm min REFLOW FINISH UNDER NICKEL PLATING 0.2μm min	6	PS	
1	POLYAMIDE	(BLACK) UL94V-0	5	PS	
3			3, 4	COPPER ALLOY	CONTACT AREA GOLD PLATING 0.76μm min PdNi PLATING 0.7μm min LEAD AREA GOLD PLATING 0.03μm min UNDER PLATING NICKEL PLATING 2μm min
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED
APPROVED : NM. NISHIMATSU	15.10.27	DRAWING NO.	EDC-124783-30-00	CHECKED	DATE
CHECKED : KN. ICHIKAWA	15.10.27	PART NO.	3560-24SR(30)		
DESIGNED : TS. ITO	15.10.27	CODE NO.	CL235-0022-3-30		
DRAWN : AK. AKIYAMA	15.10.27				

Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

4> FIG. 3 PACKING CONDITIONS

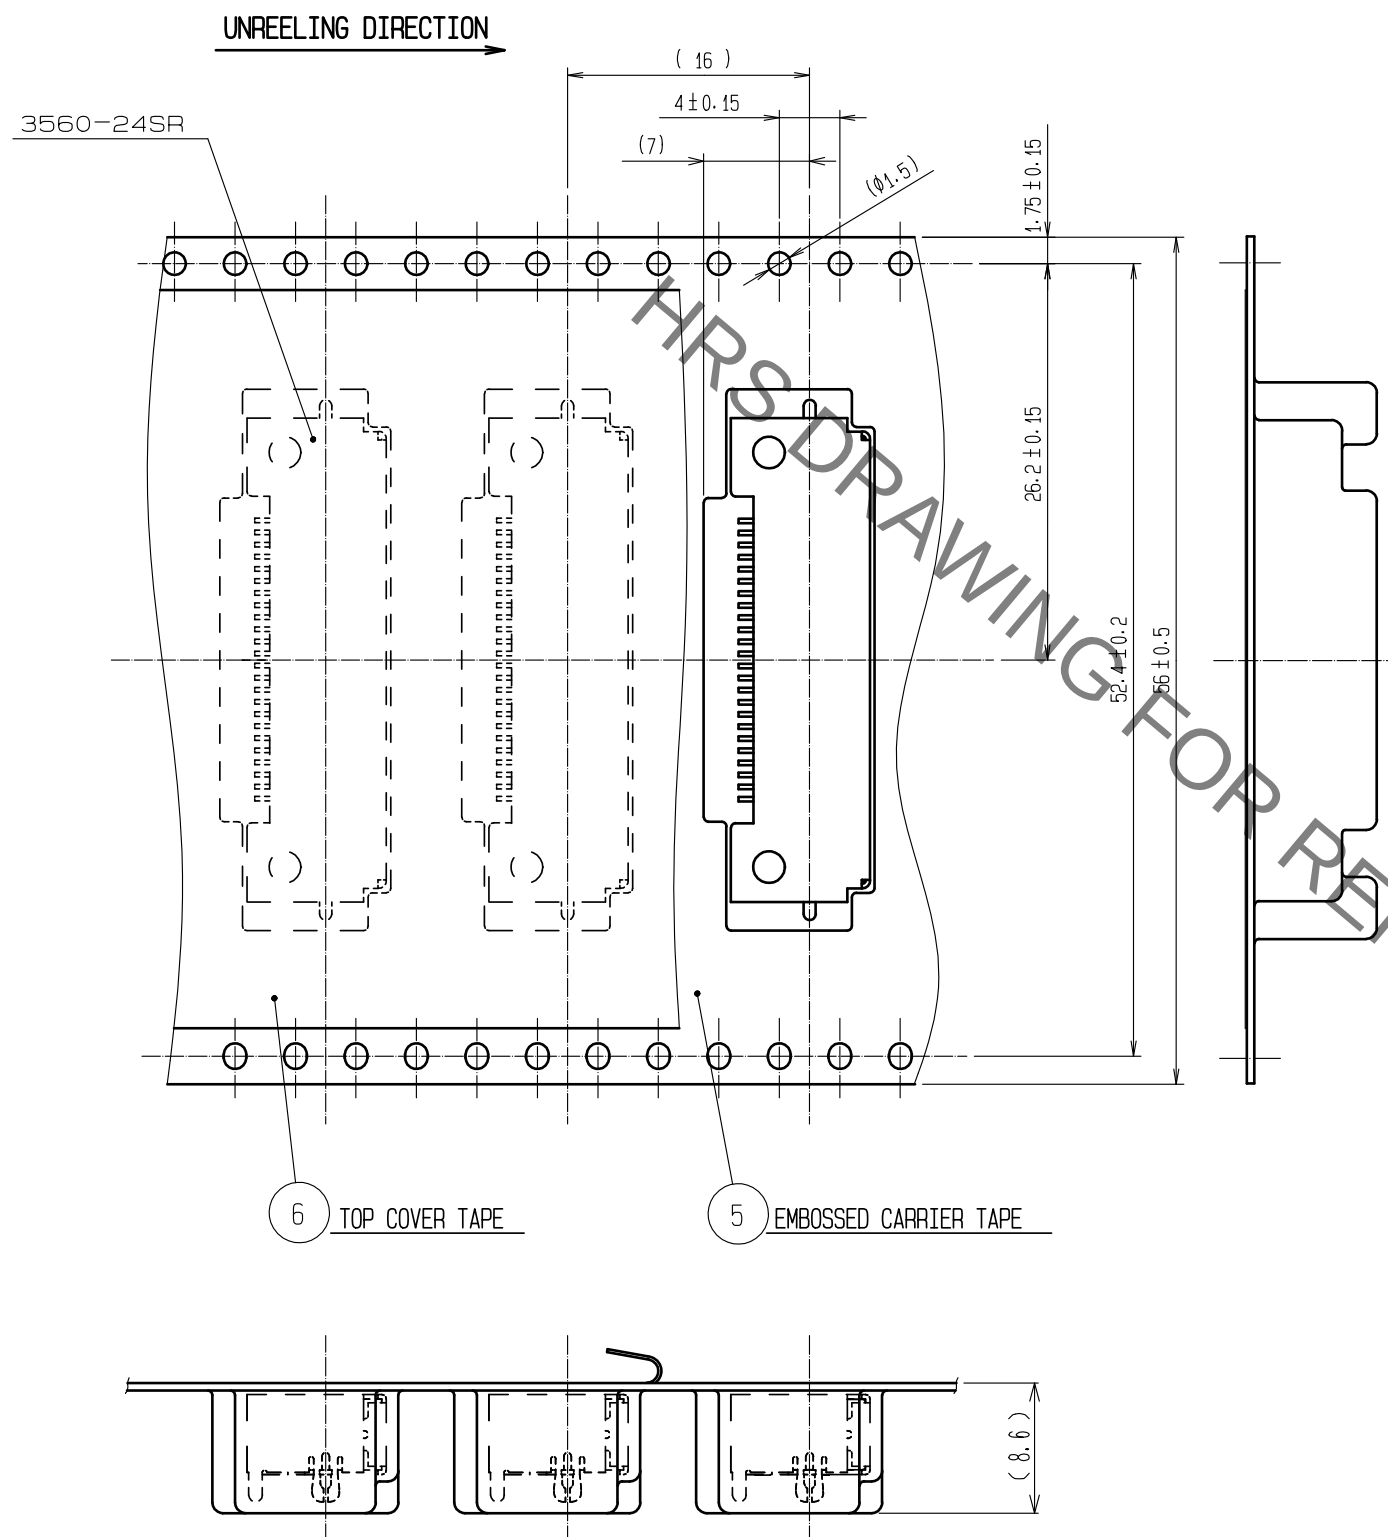

5> FIG. 4 REELING CONDITION FOR DELIVERY
(SCALE:FREE)

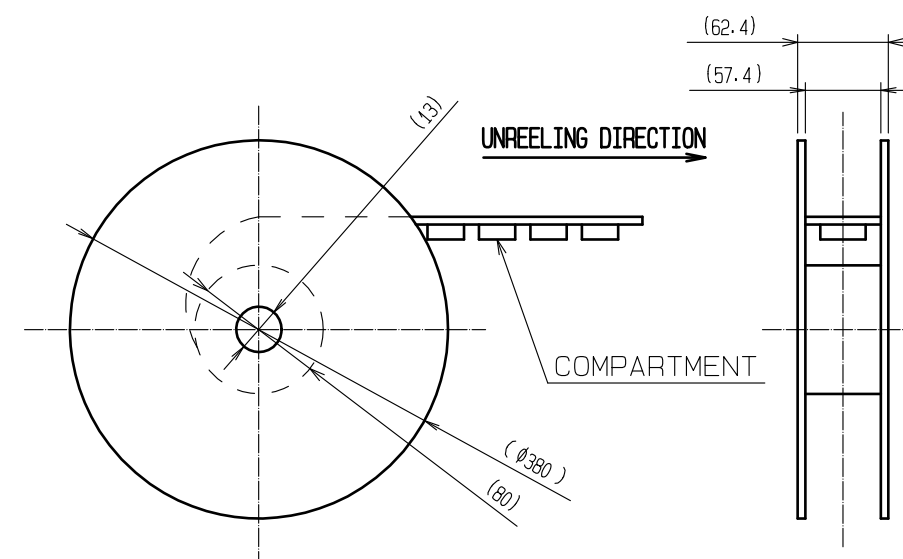

- NOTES
- 4> PACKING FOR CONNECTOR SHALL BE AS SHOWN IN FIG.3
 - 5> REELING CONDITION FOR DELIVERY SHALL BE AS SHOWN IN FIG.4 (PER REEL : 500 PCS.)

HRS

DRAWING NO.	EDC-124783-30-00
PART NO.	3560-24SR(30)
CODE NO.	CL235-0022-3-30

2/2