

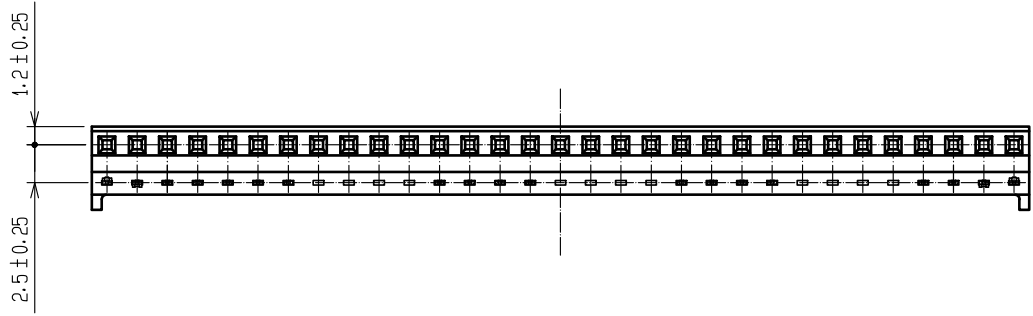
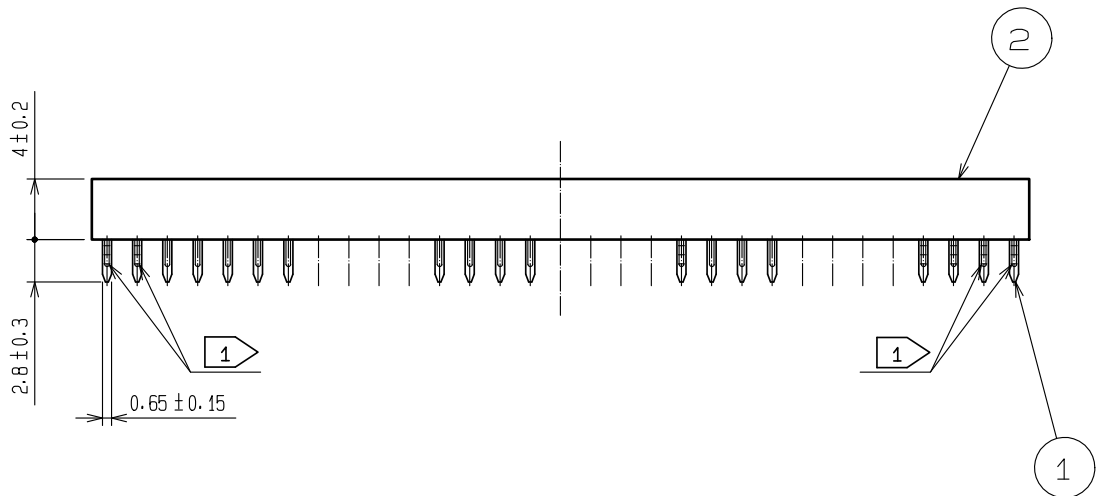


Dec.1.2018 Copyright 2018 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case that the application demands a high level of reliability, such as automotive,
please contact a company representative for further information.

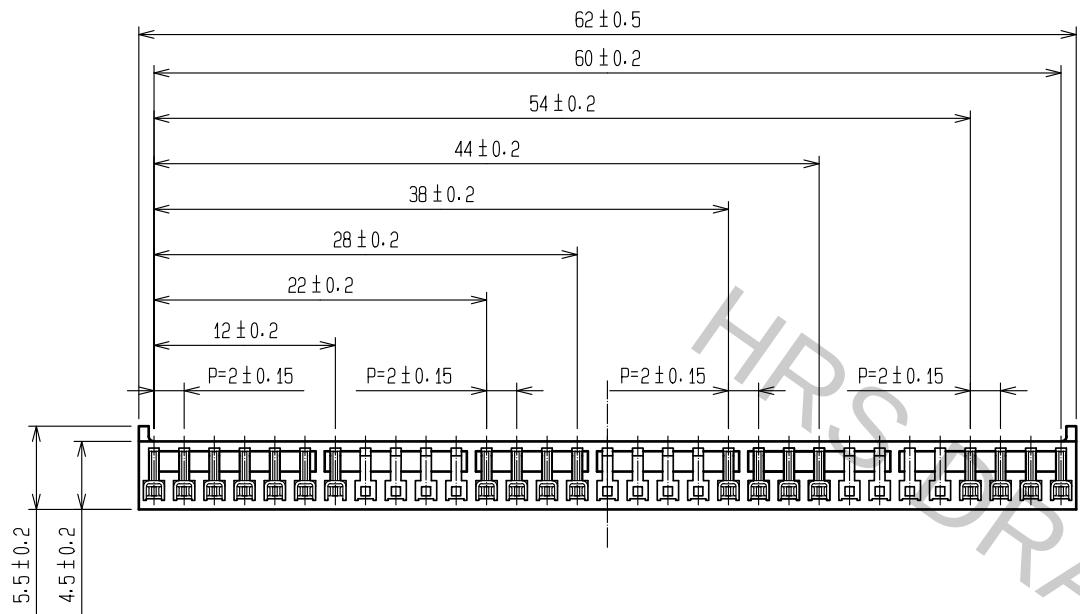

RECOMMENDED PC BOARD
HOLE PATTERN

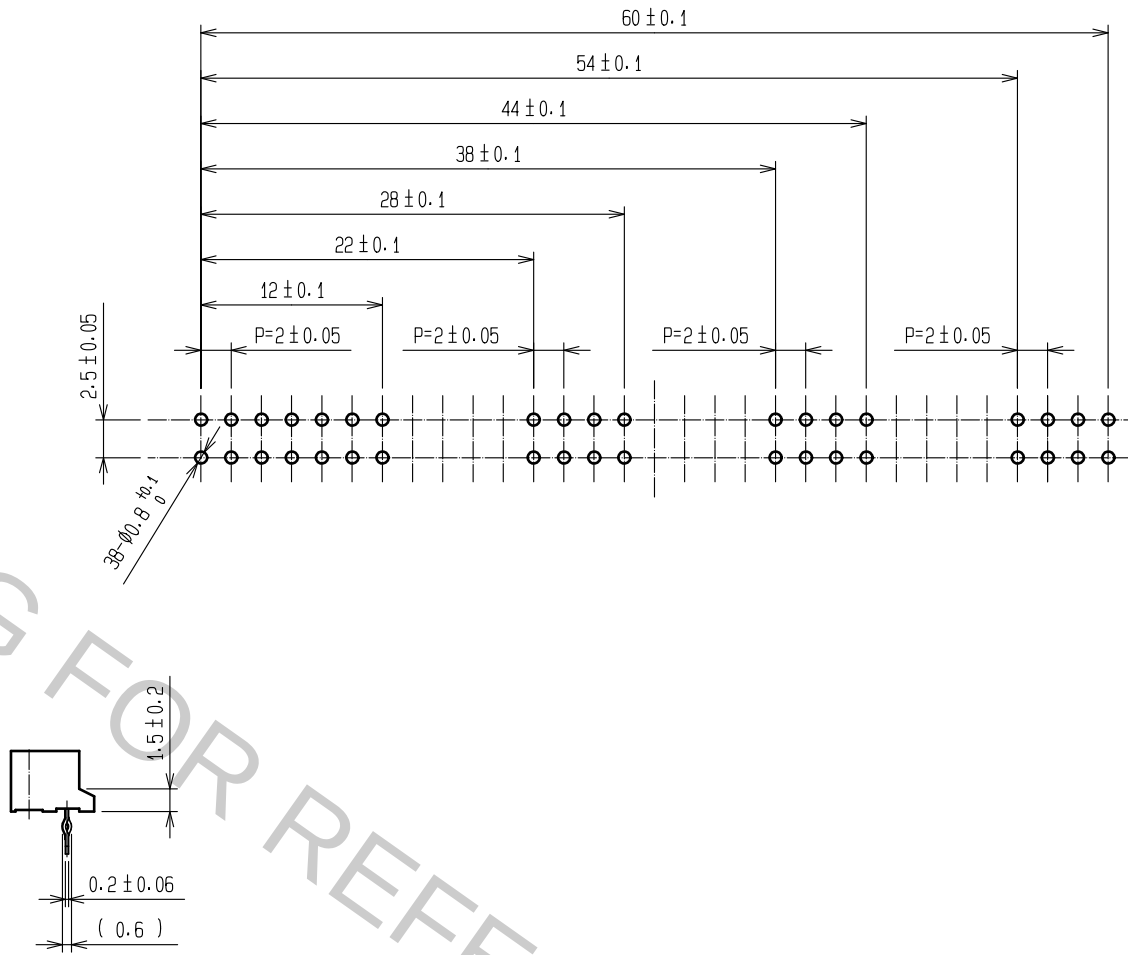

- NOTES
- 1 KINK SHOULD BE GIVEN ON 2 BOTH EDGE SIDE PINS ALTERNATELY.
 - 2 CONTACT AREA: GOLD PLATED (0.1 μm min)
LEAD AREA: TIN PLATED (REFLOW FINISHED) 1 μm min
UNDER PLATING: NICKEL 0.5 μm min

1	PHOSPHOR BRONZE	2	POLYAMIDE	BLACK, UL94V-0	
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
TOLERANCES SEE TABLE FOR SPECIFIED, UNLESS OTHERWISE		UNITS mm	COUNT		
OVER	TO	TOLERANCE	DESCRIPTION OF REVISIONS		
6	18	± 0.3	DESIGNED		
6	18	± 0.5	CHECKED		
18	50	± 0.7	DESIGNED		
50	125	± 1	DRAWN		
ASSEMBLY DRAWING		SCALE ? : 1	DRAWING NO. EDC-071907-78-00		
		ANGULAR ± 1°	PART NO. DF10-31S-2DSA(78)		
		HIROSE ELECTRIC CO., LTD.	CODE NO. CL545-0022-5-78		
			1/1		