

## SUMMARY

### # Wires

Low voltage 4



*Image is for illustrative purpose only*

|                  |                                   |
|------------------|-----------------------------------|
| Series           | OK                                |
| Termination type | Female solder                     |
| IP rating        | 68                                |
| AWG wire size    | 30.00 - 22.00                     |
| Cable Ø          | 0.00 - 0.00 mm                    |
| Status           | active                            |
| Matching parts   | <a href="#">FGA.0K.304.CLAC25</a> |

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

|                   |                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Shell Style/Model | EE*: Fixed receptacle, nut fixing (back panel mounting)                                                                       |
| Keying            | 2 keys (alpha=30, plug: male contacts, receptacle: female contacts)                                                           |
| Housing Material  | Brass (chrome plated [SAE AMS 2460]) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces |
| Weight            | 11.72 g                                                                                                                       |

### Performance

|               |                           |
|---------------|---------------------------|
| Configuration | OK.304 : 4 Low Voltage    |
| Insulator     | L: PEEK (UL 94 / V-0/1.5) |
| Rated Current | 7 Amps                    |

### Specifications


|                          |                               |
|--------------------------|-------------------------------|
| Contact Type:            | Solder                        |
| Contact Dia.:            | 0.7 mm (0.028in)              |
| Bucket Dia.:             | 0.8 mm (0.031in)              |
| Max. Solid Conductor:    | 0.34 mm <sup>2</sup> (AWG 22) |
| Max. Stranded Conductor: | 0.34 mm <sup>2</sup> (AWG 22) |
| R (max):                 | 6.1 mOhm                      |
| Vtest (contact-shell):   | 700 V (AC), 990 V (DC)        |
| Vtest (contact-contact): | 850 V (AC), 1200 V (DC)       |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Others

- Endurance (Shell): 5000 mating cycles
- Temp (min / max): -55° C / +200° C
- Humidity (max): <=95% [at 60 deg C / 140 F]
- Vibration: 15 g [10 Hz - 2000 Hz]
- Shock Resistance: 100 g [ 6 ms]
- Climatical Category: 50/175/21
- Shielding (min): 95 dB (10 MHz)
- Shielding (min): 80 dB (1 GHz)
- Salt Spray Corrosion: >1000 hr

DRAWINGS

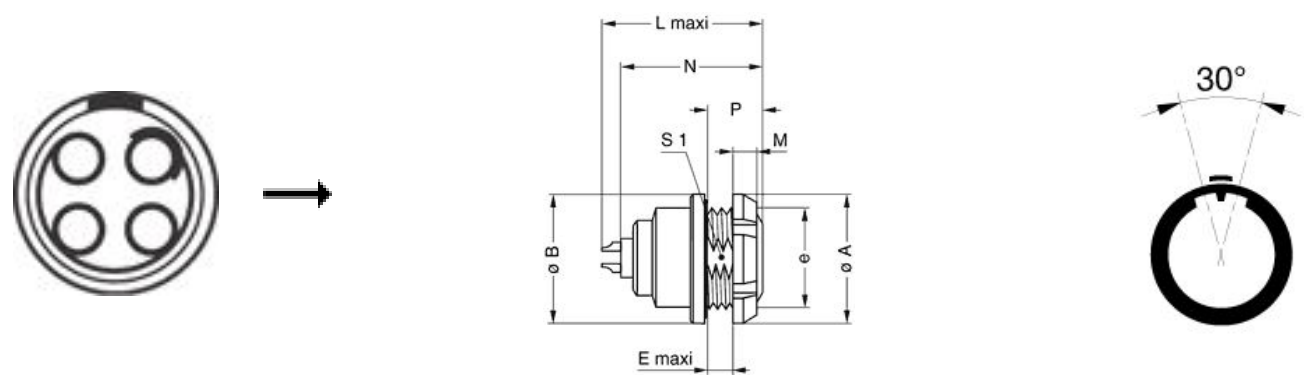

Dimensions

|     | A    | B    | E    | L    | M    | N    | P    | S1   | e       |
|-----|------|------|------|------|------|------|------|------|---------|
| mm. | 18   | 18   | 3.4  | 21.7 | 3.5  | 20.1 | 7    | 12.5 | M14x1.0 |
| in. | 0,71 | 0,71 | 0,13 | 0,85 | 0,14 | 0,79 | 0,28 | 0,49 |         |

RECOMMENDED BY LEMO

Tools

LEMO products and services are provided “as is”. LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

## Cables

|                    |               |       |                                                                                       |
|--------------------|---------------|-------|---------------------------------------------------------------------------------------|
| CMN.04.T22.047QGC  | TPR           | Grey  |                                                                                       |
| CMN.04.T22.048QGZE | TPR (medical) | Grey  |    |
| CMN.04.T28.031PGCE | PVC           | GREY  |    |
| CMN.04.T28.031PGZE |               | Grey  |    |
| CMN.04.T28.031PNCE | PVC           | Black |    |
| CMN.04.T28.031PNZE |               |       |    |
| CMN.04.T28.031QGC  | TPR           | Grey  |                                                                                       |
| 140240             | PVC           | Black |    |
| 140250             | PVC           | Grey  |    |
| 40080              | PVC           | Black |                                                                                       |
| 40086              | PVC           | Blue  |                                                                                       |
| 40140              | PVC           | Black |    |
| 40240              | PTFE          | White |    |
| 40260              | PVC           | Black |    |
| 4041               | PVC           | Grey  |     |
| 4050               | PVC           | Black |   |
| 4080               | PVC           | Grey  |                                                                                       |
| 417920             | PVC           | Grey  |   |
| 4220               | PVC           | Black |  |
| 4221               | PVC           | Black |  |
| 4260               | PTFE          | White |  |
| 4280               | PVC           | Black |  |
| 80080              | PVC           | Grey  |                                                                                       |
| 80082              | PVC           | Red   |                                                                                       |
| 80084              | PVC           | Black |                                                                                       |
| CTR.75.030.121870G | PVC           | Grey  |  |

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.