THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REV PER ECO-20-003456	15APR2020	RGV	KF
	E	REV PER ECN-23-241925	14DEC2023	SMR	LM

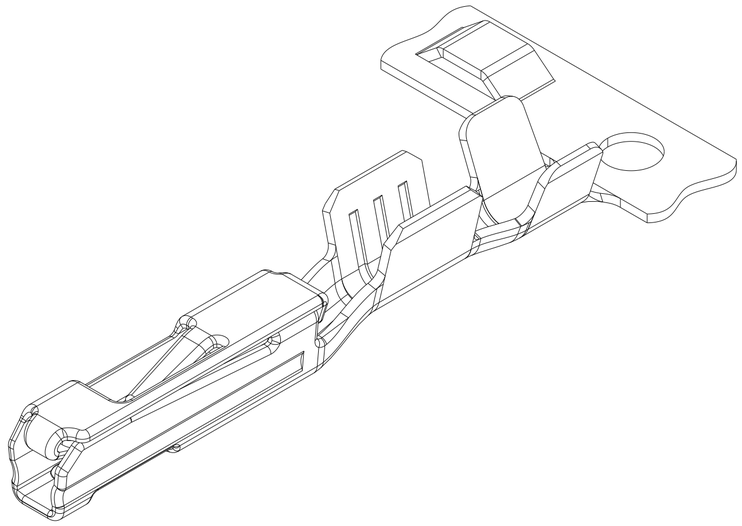

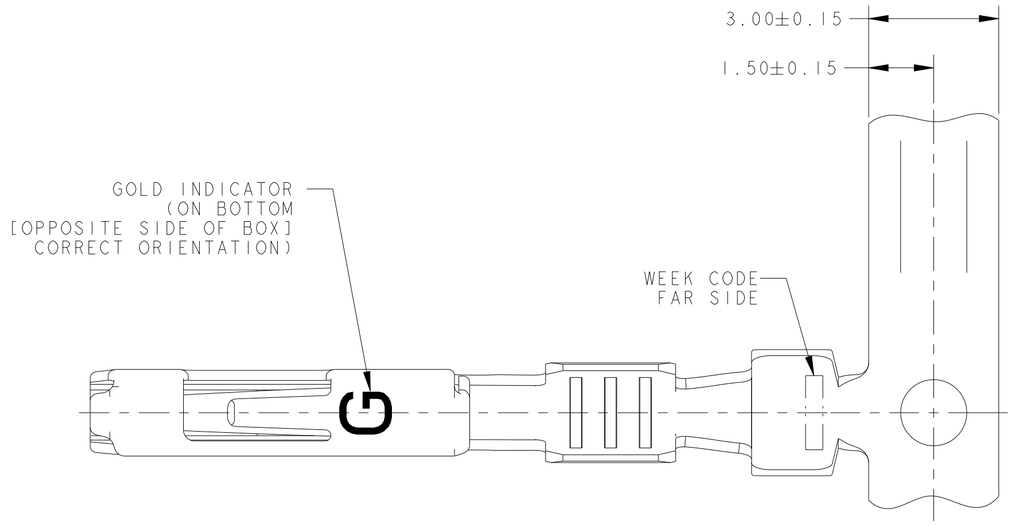

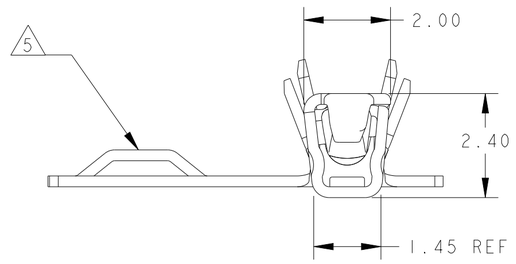

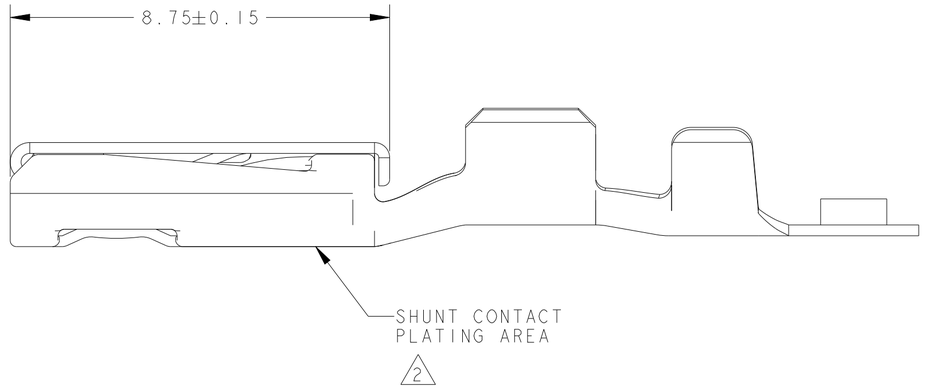

1. FINISH: PLATED 0.0038 MIN THICK GOLD IN MATING AREA WITH 0.0025 MIN THICK TIN IN WIRE CRIMP AREA, ALL OVER 0.002 MIN THICK NICKEL.
2. FINISH: PLATED 0.0038 MIN THICK GOLD IN MATING AREA, PLATED 0.00038 MIN THICK GOLD IN SHUNT CONTACT PLATING AREA WITH 0.0025 MIN THICK TIN IN WIRE CRIMP AREA, ALL OVER 0.002 MIN THICK NICKEL.
3. NOTE DELETED.
4. PART LUBRICATED WITH CHEMLUBE 1102
5. FEATURE ON CARRIER STRIP IS RAISED ON GOLD PLATED PRODUCT. FEATURE APPEARS ADJACENT TO EVERY OTHER CONTACT MIN.
6. SEE FIGURE 1 FOR REELING DIRECTION.
7. SEE FIGURE 2 FOR REELING DIRECTION.
8. FOR LEVER ASSISTED CONNECTORS WITH SIDE SLIDE ACTION THE ALLOWABLE WIRE BRUSH LENGTH RANGE IS 0.10-0.70MM.

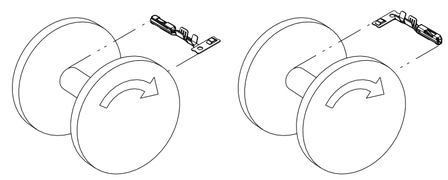

FIGURE 1 FIGURE 2

REELING DIRECTION OFF TOP OF REEL

REELING	LUBRICATION	FINISH	WIRE SIZE	PART NUMBER
7	4	2	22	1326028-8
			18-20	1326028-7
		1	22	1326028-6
			18-20	1326028-5
6		2	22	1326028-4
			18-20	1326028-3
		1	22	1326028-2
			18-20	1326028-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±-
1 PLC ±-
2 PLC ±0.20
3 PLC ±-
4 PLC ±-
ANGLES ±3°

MATERIAL: 0.25 THK COPPER ALLOY

FINISH: - SEE TABLE

DWN J R SHUEY 02SEP99
CHK J M MYER 02SEP99
APVD K DENLINGER 02SEP99
PRODUCT SPEC 108-2220
APPLICATION SPEC 114-13006
WEIGHT -

TE Connectivity

NAME: CONTACT, FEMALE, 0.64mm GOLD PLATED

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1326028	-

Customer Drawing | SCALE 10:1 | SHEET 1 OF 1 | REV E