# **Data Sheet**



# **Sencity Special Communication Antenna** 91121364

## **Description**

1-Port Panel Antenna Frequency Range 380-500 MHz Vertical Polarization Half-power Beam Width 65° Gain 15 dBi



# **Product Configuration**

## **Technical Data**

## **Electrical Data**

	Band 1	Band 2
Frequency (MHz)	380 - 430	430 - 500
VSWR	1.5	1.5
Impedance (Ohm)	50	50
Gain (dBi)	14.5	15
3dB beamwidth (h) (°)	68	63
3dB beamwidth (v) (°)	18	16
Composite power max (W)	500	500
Ambient temperature (°C)	50	50
Front to back ratio (dB)	20	20

## **Ports**

	Port 1
Connector	7/16, jack (female)
Polarization	vertical
DC grounded	Yes

## Connections

	Band 1	Band 2
Port 1	Χ	X

## **General Data**

IMD level -150 dBc at carrier power 2x 43dBm

**Mechanical Data** 

Dimensions (mm) 2000 x 492 x 190 (Heigth x Width x Depth)

Weight (kg)

Windload frontal: 1100 N at 150 km/h, lateral:440 N at 150 km/h, Wind speed survival: 200 km/h

Packing Size (mm): 2080x523x252

## **Environmental Data**

Environmental conditions outdoor 2011/65/EU (RoHS - including compliant 2015/863 and 2017/2102)

WEEE 2012/19/EU no special marking needed

REACH 1907/2006/EC compliant

## **Data Sheet**



# **Sencity Special Communication Antenna** 91121364

## Grounding:

The metal parts of the antenna including the mounting kit and the inner conductors are DC grounded.

## Ice protection:

Due to the very sturdy antenna construction and the protection of the radiating system by the radome, the antenna remains operational even under icy conditions.

#### Material:

Reflector screen: Weather-proof aluminum.

All screws and nuts: Stainless steel.

#### **Material Data**

Radome colour grey

Radome material Glass Reinforced Plastic (GRP)

Back plate/base plate colour grey
Back plate/base plate material Aluminium

## **Related Products**


738546 Clamp 42-115mm 85010002 Clamp 110-220mm 85010003 Clamp 210-380mm 85010009 Downtilt Kit

Order separately. For downtilt mounting use the clamps for an appropriate mast diameter together with the downtilt kit.

## **Related Documents**

Mounting instructionDOC-0000871325Security instructionDOC-0000278984Outline drawingDOU-00397899

## **Additional Information**

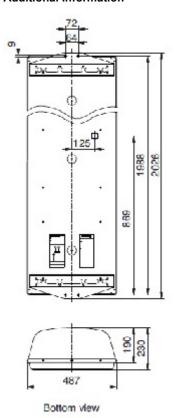

# **Data Sheet**



**Sencity Special Communication Antenna** 91121364

HUBER+SUHNER is certified according to ISO 9001, ISO 14001, AS/EN9100, ISO/TS 16949 and IRIS.

www.hubersuhner.com

Waiver: Fact and figures herein are for information only and do not represent any warranty of any kind.