

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	00		A	RELEASED	24SEP2012	-	JE

- 2

PHOSPHOR BRONZE
- 3

LCP, UL94V-0
- 4

FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 5






CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6

REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7


APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8

DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9

CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

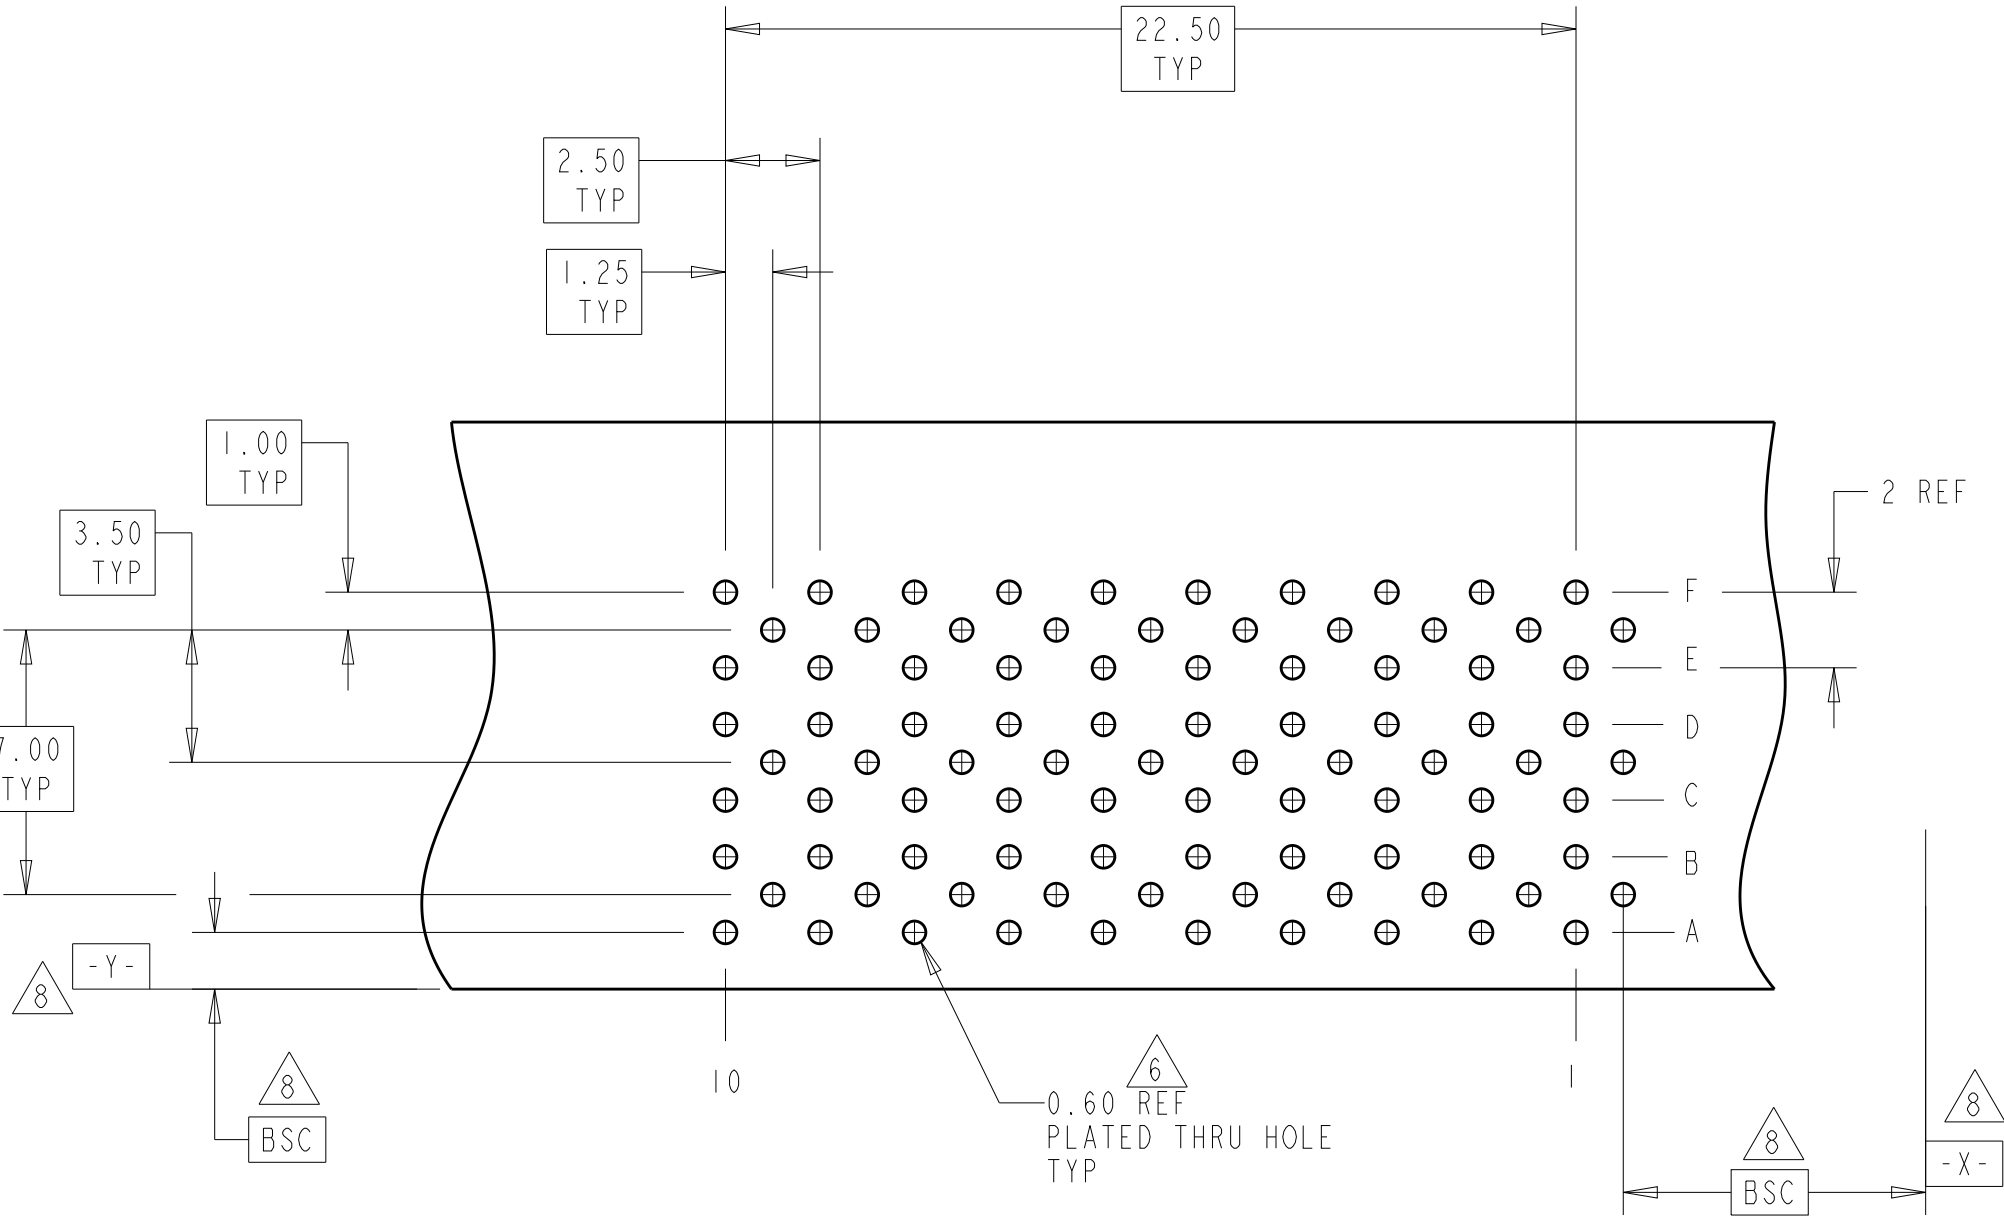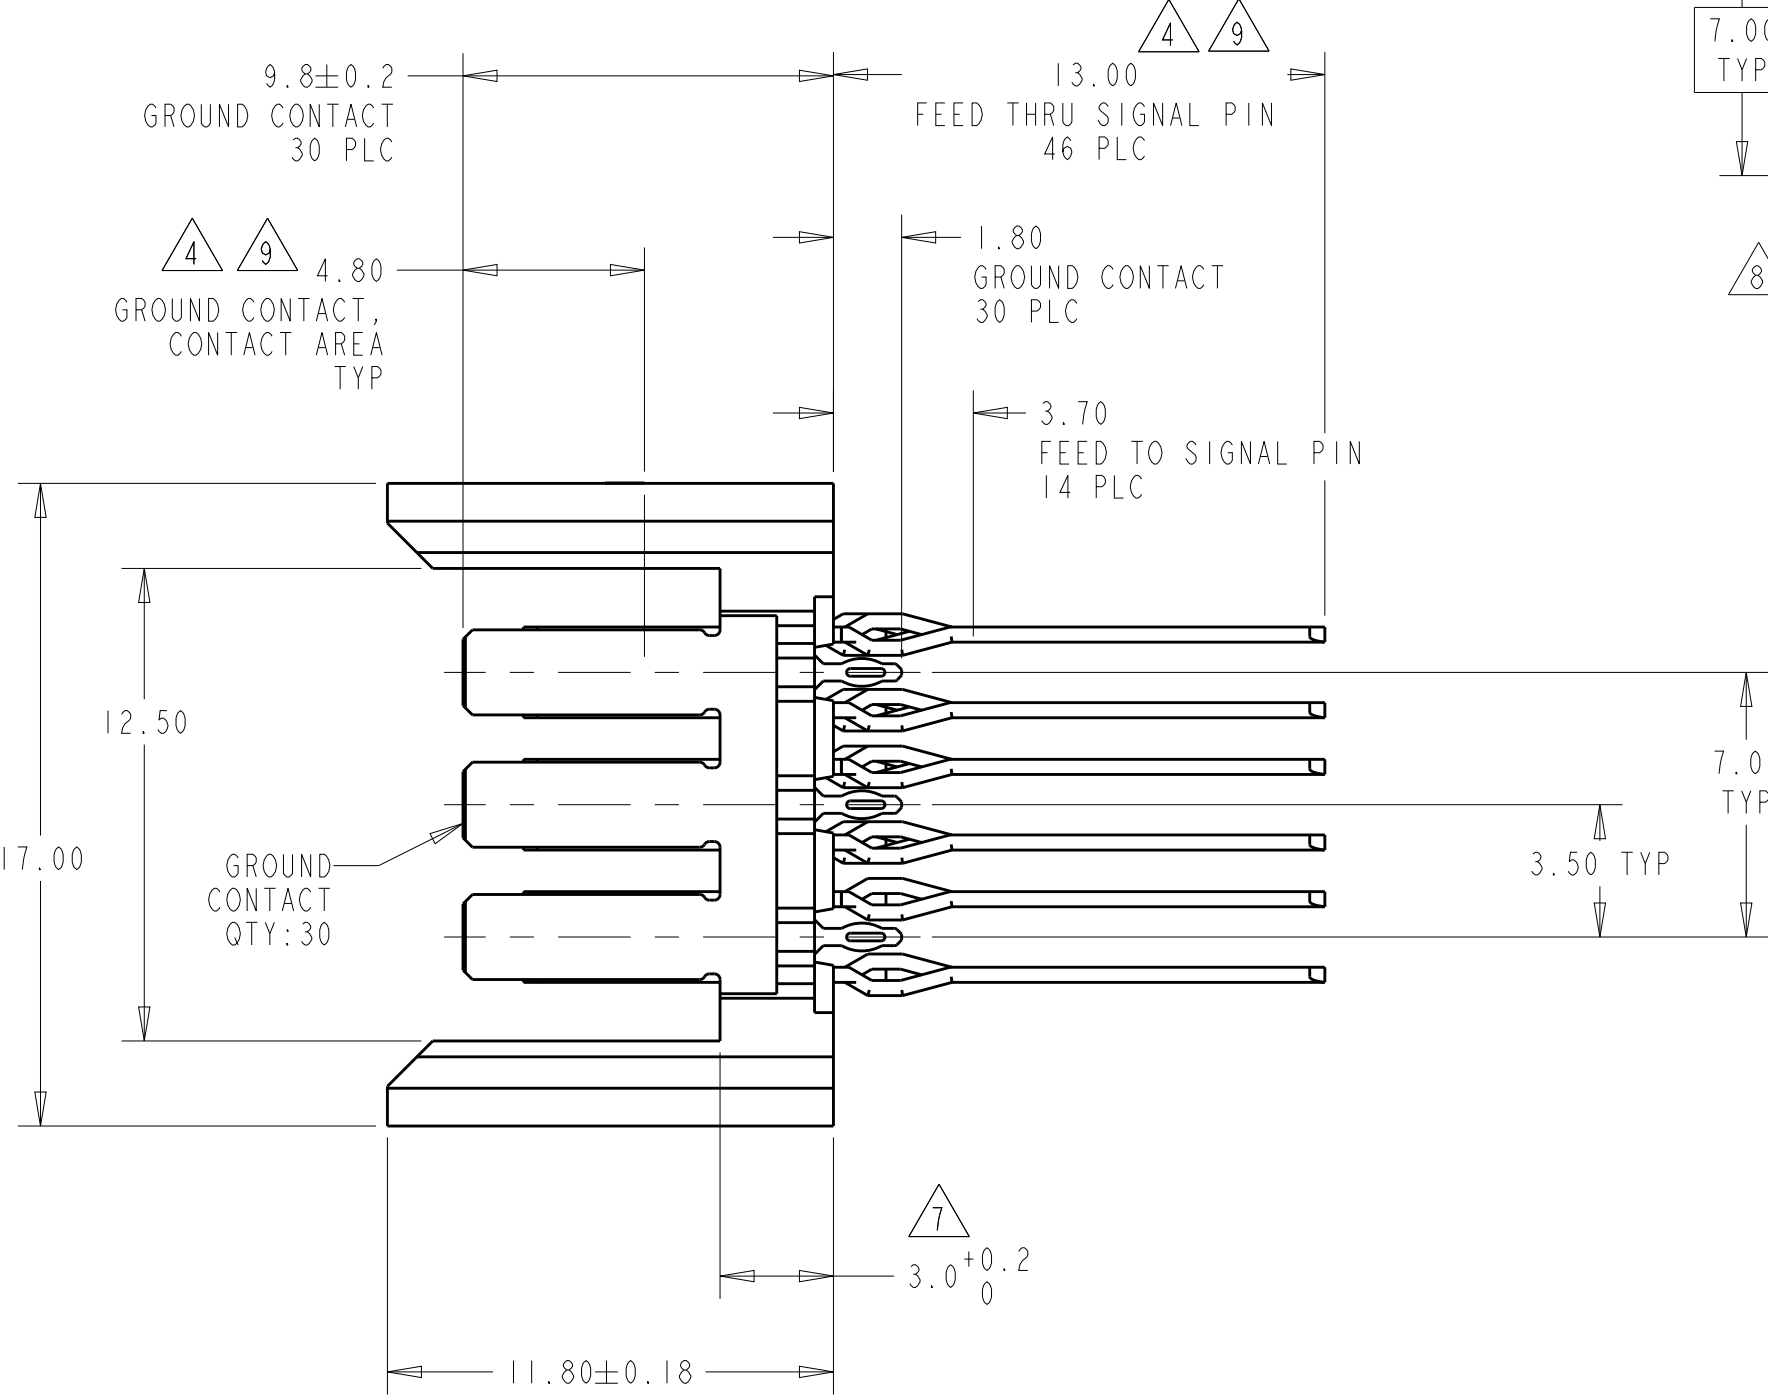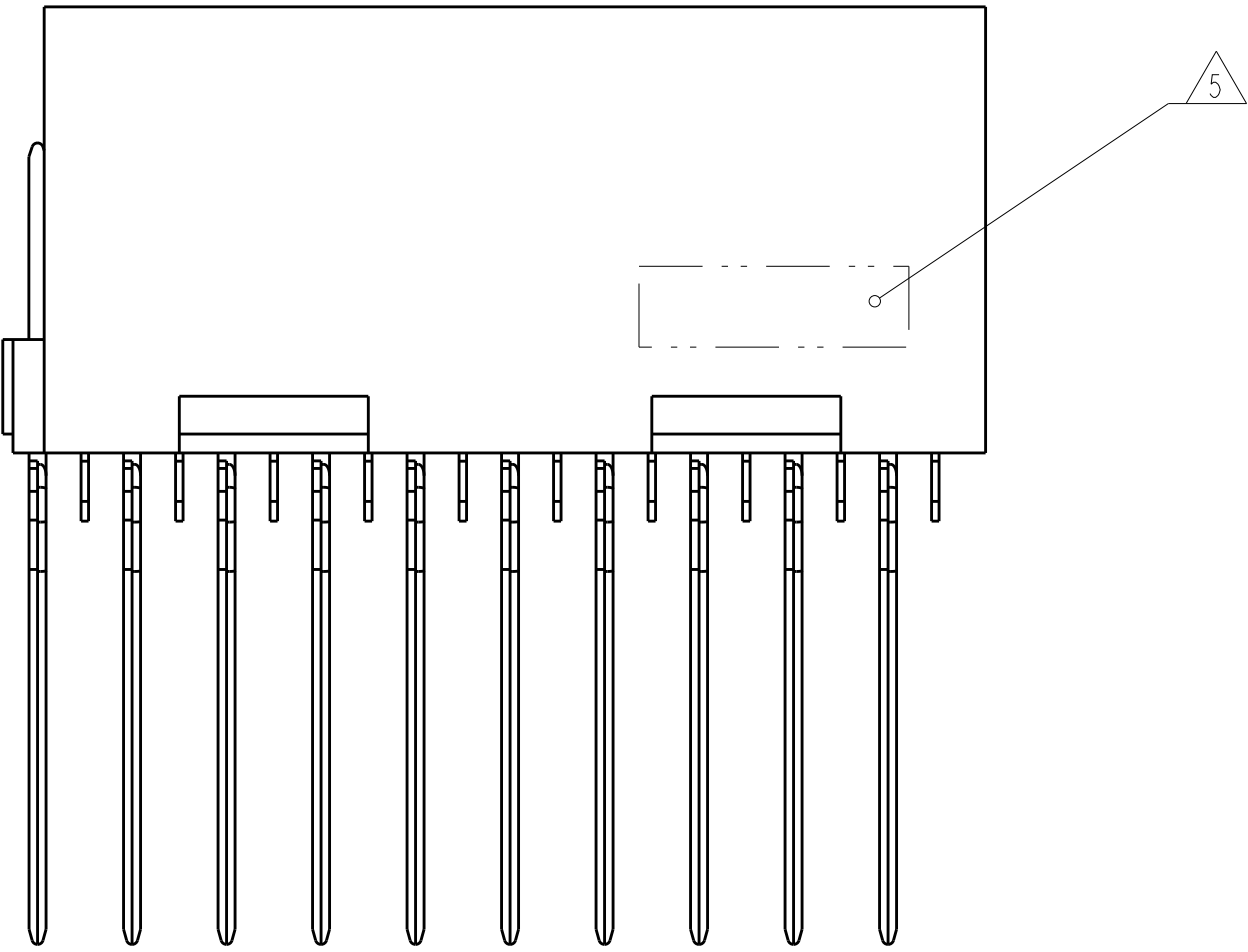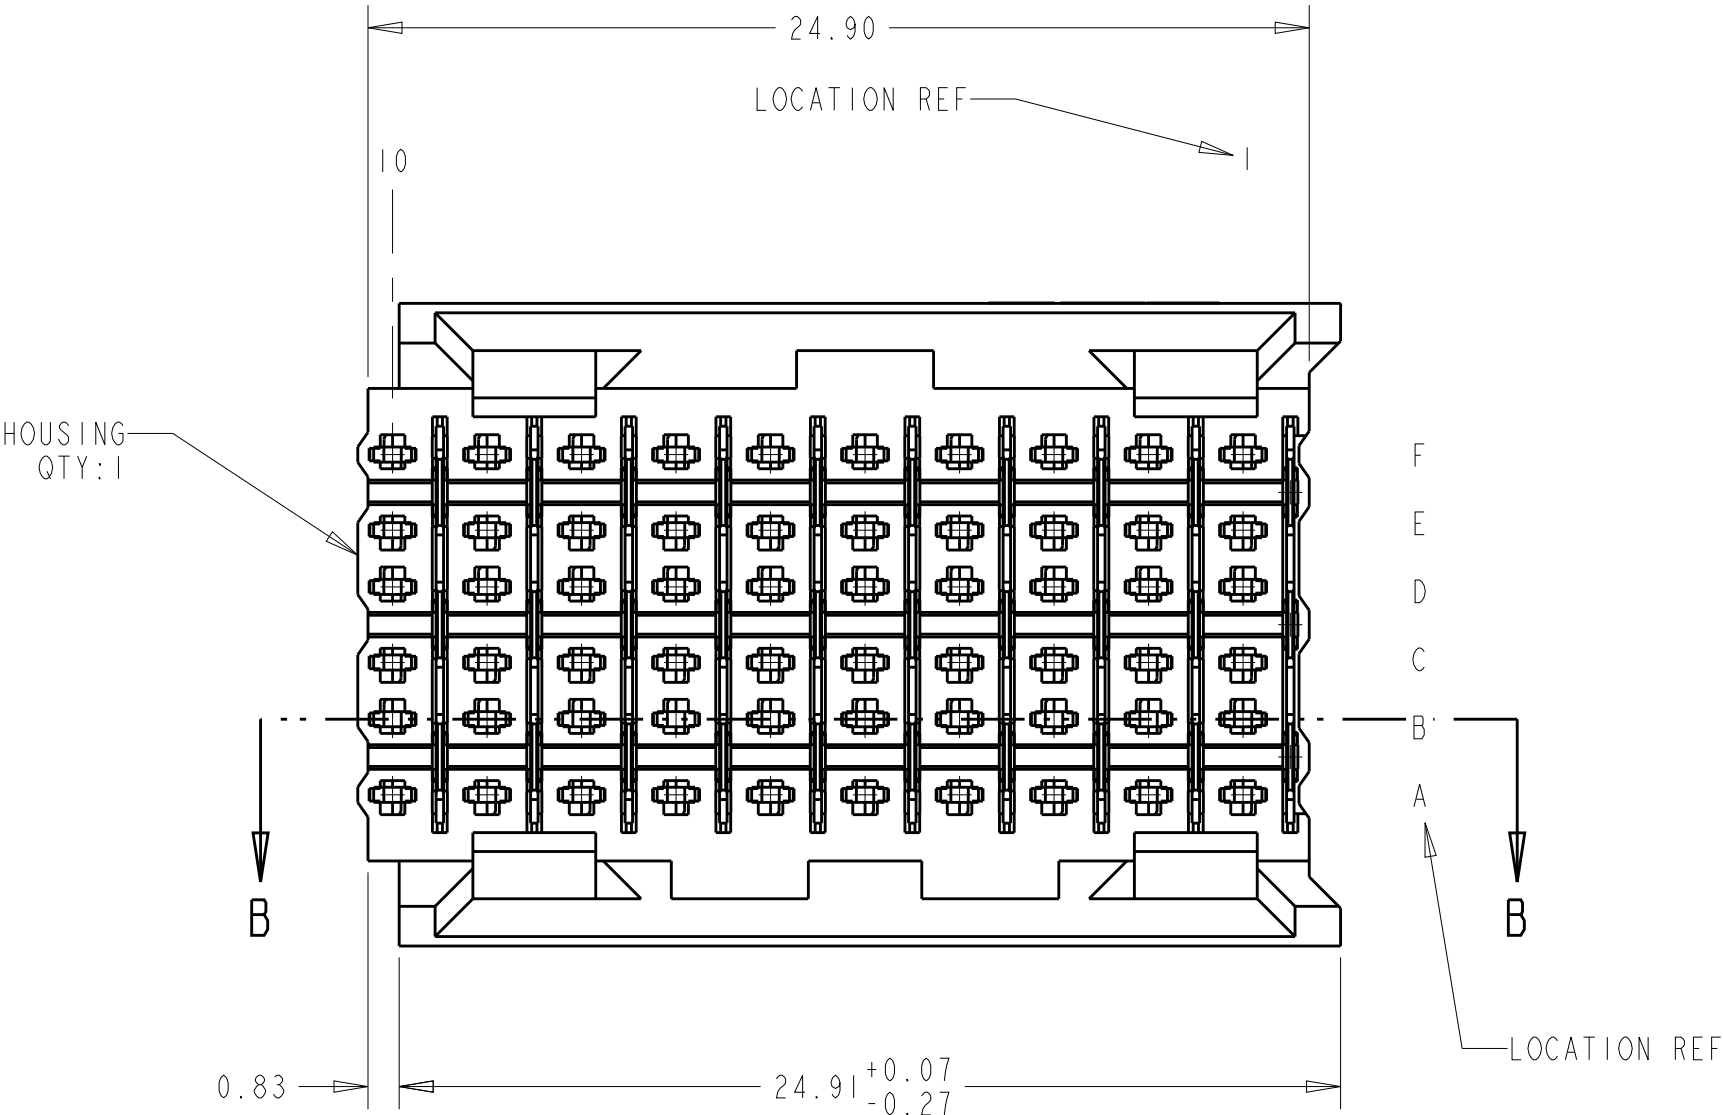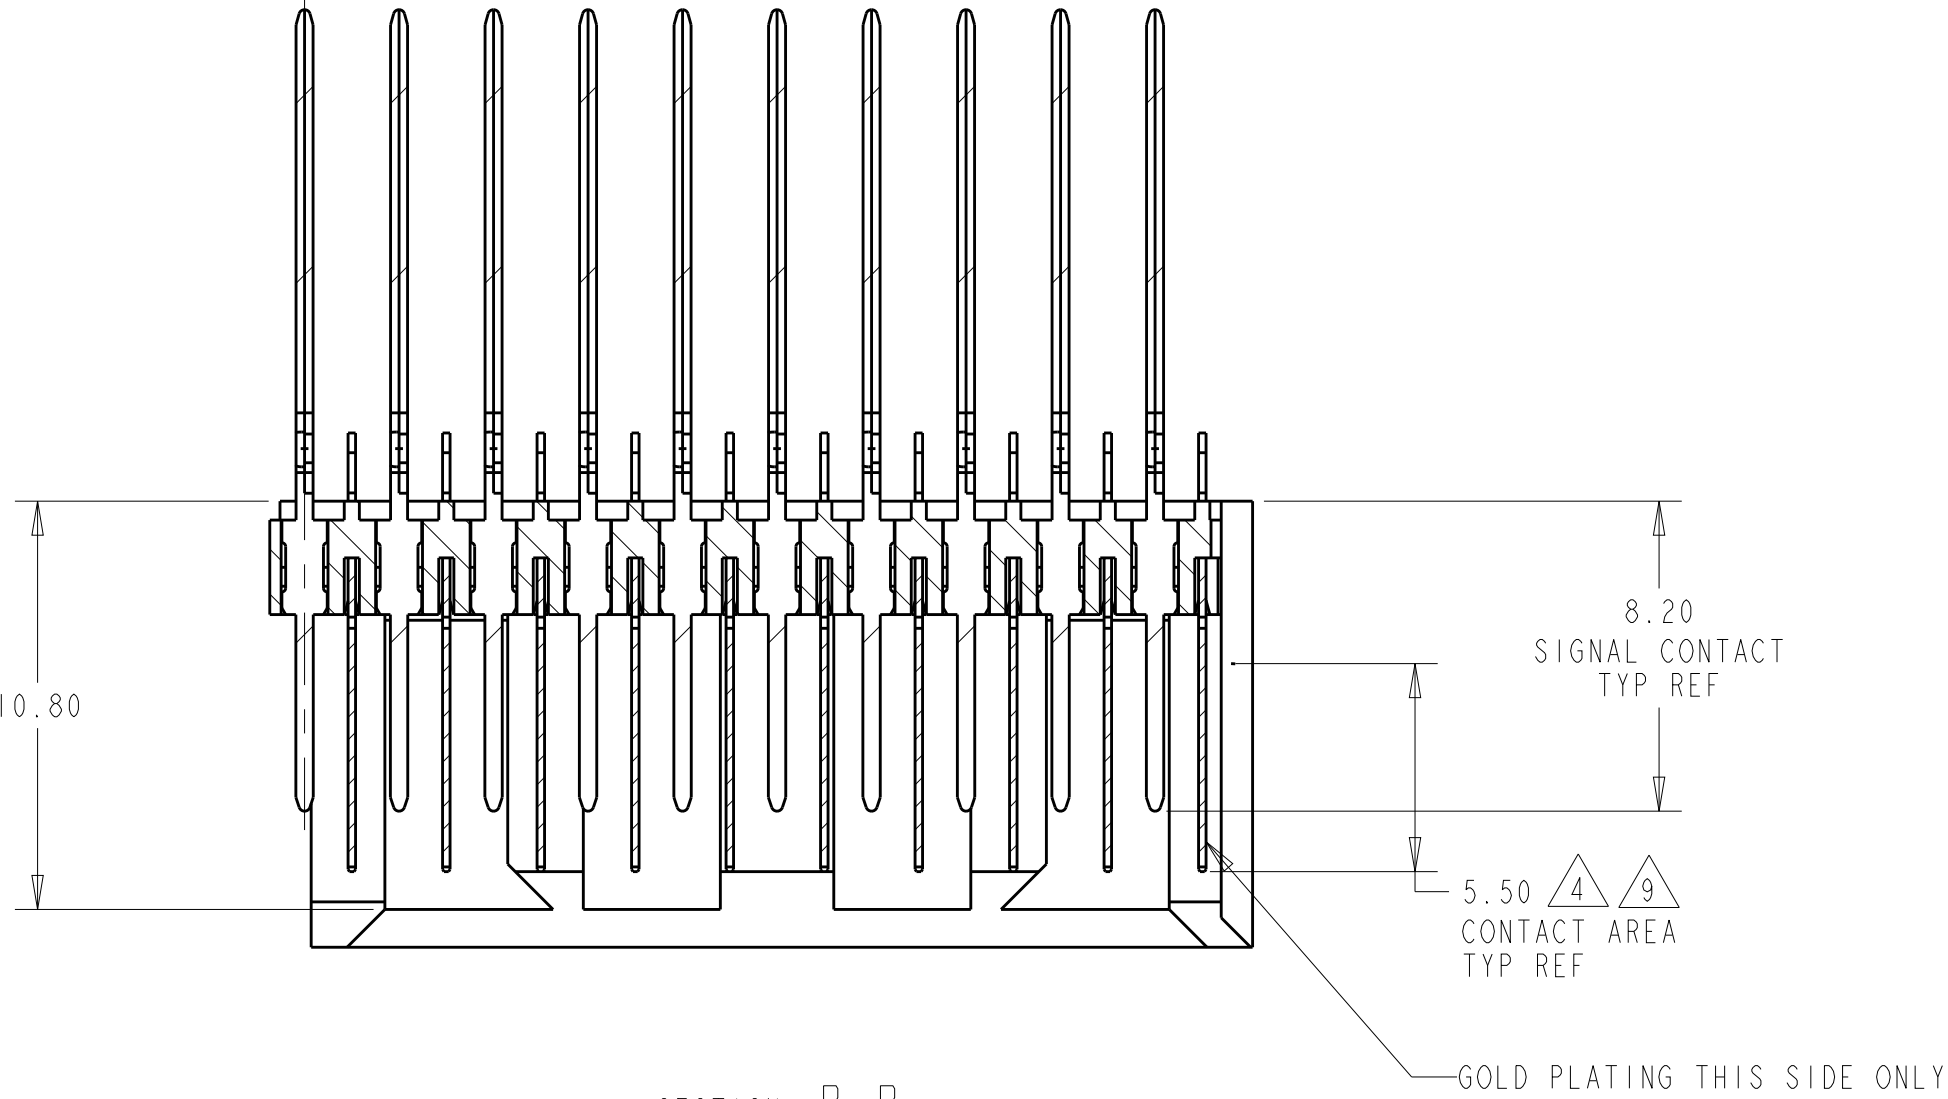

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

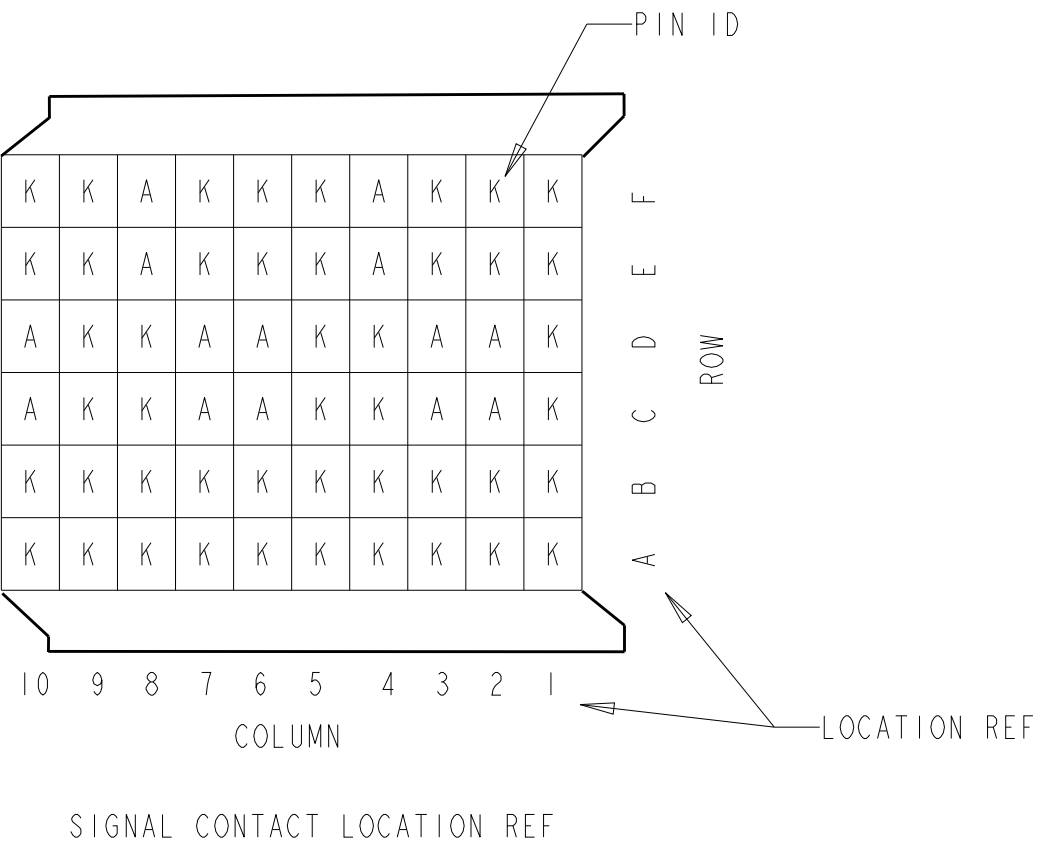

THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN: R. TREA 19FEB2007				5120994-1			
DIMENSIONS:				CHK: R. PATTERSON 19FEB2007				PART NUMBER			
mm				APVD: R. PATTERSON 9FEB2007				TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:				PRODUCT SPEC				NAME: HEADER ASSEMBLY, 60 POSITION, 6 ROW, FEED THROUGH, BACKPLANE CONNECTOR, Z-PACK HS3			
0 PLC ±				APPLICATION SPEC				SIZE: CAGE CODE DRAWING NO			
1 PLC ±0.13				WEIGHT				A1 00779 ©=5120994			
2 PLC ±0.05				CUSTOMER DRAWING				SCALE 5:1 SHEET 1 OF 1 REV A			
3 PLC ±											
4 PLC ±											
ANGLES											
FINISH											
MATERIAL											
HOUSING: 3											
CONTACTS: 2											
SIGNAL CONTACT: 4											