

FEATURES

- 5 kV rms and 3.75 kV rms LVDS isolators
- Complies with TIA/EIA-644-A LVDS standard
- Multiple dual-channel configurations
- Any data rate up to 1.1 Gbps switching with low jitter
 - 4 ns typical propagation delay
 - 2.6 ps rms typical random jitter, rms
 - 90 ps typical peak-to-peak total jitter at 1.1 Gbps
- 2.5 V or 3.3 V supplies
- 75 dBc power supply ripple rejection, phase spur level
- Glitch immunity
- ±8 kV IEC 61000-4-2 ESD protection across isolation barrier
- High common-mode transient immunity: >25 kV/μs
- Passes EN 55022 Class B radiated emissions limits with 1.1 Gbps PRBS
- Safety and regulatory approvals** (20-lead SOIC_W package)
 - UL (pending): 5000 V rms for 1 minute per UL 1577
 - CSA Component Acceptance Notice 5A (pending)
 - VDE certificate of conformity (pending)
 - DIN V VDE V 0884-10 (VDE V 0884-10):2006-12
 - $V_{IORM} = 424 V_{PEAK}$
- Fail-safe output high for open, short, and terminated input conditions (ADN4655/ADN4656)
- Operating temperature range: –40°C to +125°C
- 7.8 mm minimum creepage and clearance

APPLICATIONS

- Isolated video and imaging data
- Analog front-end isolation
- Data plane isolation
- Isolated high speed clock and data links

GENERAL DESCRIPTION

The ADN4654/ADN4655/ADN4656¹ are signal isolated, low voltage differential signaling (LVDS) buffers that operate at up to 1.1 Gbps with low jitter. The devices integrate Analog Devices, Inc., *iCoupler*® technology, enhanced for high speed operation to provide galvanic isolation of the TIA/EIA-644-A compliant LVDS drivers and receivers. This integration allows drop-in isolation of an LVDS signal chain.

The ADN4654/ADN4655/ADN4656 comprise multiple channel configurations, and the LVDS receivers on the ADN4655 and ADN4656 include a fail-safe mechanism to ensure a Logic

¹ Protected by U.S. Patents 5,952,849; 6,873,065; 6,903,578; and 7,075,329. Other patents are pending.

Rev. D **Document Feedback**
Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

FUNCTIONAL BLOCK DIAGRAMS

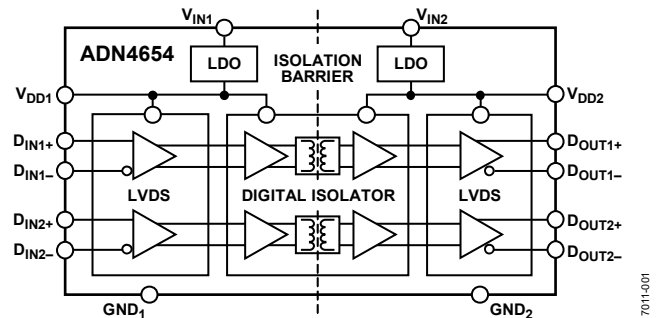


Figure 1.

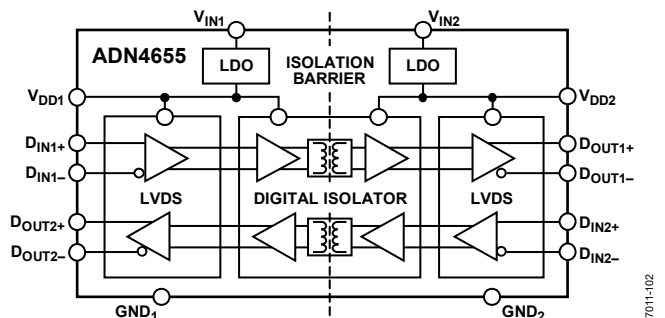


Figure 2.

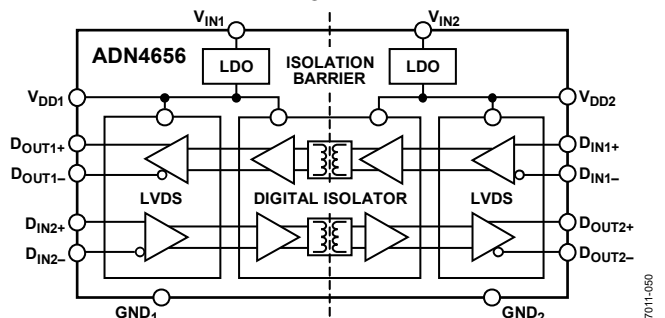


Figure 3.

1 on the corresponding LVDS driver output when the inputs are floating, shorted, or terminated but not driven.

For high speed operation with low jitter, the LVDS and isolator circuits rely on a 2.5 V supply. An integrated on-chip low dropout (LDO) regulator can provide the required 2.5 V from an external 3.3 V power supply. The devices are fully specified over a wide industrial temperature range and come in a 20-lead, wide body SOIC_W package with 5 kV rms isolation or in a 20-lead SSOP package with 3.75 kV rms isolation.

TABLE OF CONTENTS

| | | | |
|--|---|--|----|
| Features | 1 | ESD Caution..... | 8 |
| Applications..... | 1 | Pin Configurations and Function Descriptions | 9 |
| Functional Block Diagrams..... | 1 | Typical Performance Characteristics | 12 |
| General Description | 1 | Test Circuits and Switching Characteristics..... | 17 |
| Revision History | 2 | Theory of Operation | 18 |
| Specifications..... | 3 | Truth Table and Fail-Safe Receiver | 18 |
| Receiver Input Threshold Test Voltages | 4 | Isolation | 19 |
| Timing Specifications | 4 | Applications Information | 20 |
| Insulation and Safety Related Specifications | 5 | PCB Layout | 20 |
| Package Characteristics | 6 | Application Examples | 20 |
| Regulatory Information..... | 6 | Magnetic Field Immunity..... | 22 |
| DIN V VDE V 0884-10 (VDE V 0884-10) Insulation | | Insulation Lifetime | 22 |
| Characteristics (Pending)..... | 7 | Outline Dimensions | 24 |
| Recommended Operating Conditions | 7 | Ordering Guide | 25 |
| Absolute Maximum Ratings..... | 8 | | |
| Thermal Resistance | 8 | | |

REVISION HISTORY

9/2019—Rev. C to Rev. D

| | |
|---------------------------------|----|
| Changes to Ordering Guide | 25 |
|---------------------------------|----|

6/2019—Rev. B to Rev. C

| | |
|--|-----------|
| Added ADN4656 | Universal |
| Changes to Features Section..... | 1 |
| Added Figure 3; Renumbered Sequentially | 1 |
| Added Note 1, Table 8 | 7 |
| Added Figure 8 and Table 15; Renumbered Sequentially | 11 |
| Changes to Magnetic Field Immunity Section | 22 |
| Changes to Ordering Guide | 25 |

3/2019—Rev. A to Rev. B

| | |
|---|----|
| Changes to Title, Features Section, General Description | |
| Section, and Figure 2..... | 1 |
| Changes to Table 4..... | 5 |
| Added Table 5..... | 5 |
| Changes to Table 7..... | 6 |
| Changes to Table 8 and Figure 4..... | 7 |
| Changes to Table 10, Table 11, and Table 12..... | 8 |
| Added Figure 44..... | 23 |
| Changes to Ordering Guide | 23 |

1/2019—Rev. 0 to Rev. A

| | |
|--|-----------|
| Added ADN4655..... | Universal |
| Added Figure 2; Renumbered Sequentially | 1 |
| Changes to General Description Section | 1 |
| Changes to Table 1..... | 3 |
| Changes to Table 3..... | 4 |
| Added Timing Diagram Section and Figure 3 | 5 |
| Changes to Figure 5 Caption and Table 12 Title | 9 |
| Added Figure 6 and Table 13; Renumbered Sequentially | 10 |
| Changes to Theory of Operation Section and Truth Table and | |
| Fail Safe Receiver Section | 17 |
| Added Table 15 | 17 |
| Moved Isolation Section | 18 |
| Moved PCB Layout Section | 19 |
| Changes to PCB Layout Section..... | 19 |
| Changes to Ordering Guide | 23 |

11/2018—Revision 0: Initial Version

SPECIFICATIONS

For all minimum and maximum specifications, $V_{DD1} = V_{DD2} = 2.375 \text{ V}$ to 2.625 V , $T_A = -40^\circ\text{C}$ to $+125^\circ\text{C}$, unless otherwise noted. For all typical specifications, $V_{DD1} = V_{DD2} = 2.5 \text{ V}$, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 1.

| Parameter | Symbol | Min | Typ | Max | Unit | Test Conditions/Comments |
|---|--|---------------|------|---------------------|-------------------|--|
| INPUTS (RECEIVERS) | | | | | | |
| Input Threshold | | | | | | See Figure 38 and Table 2 |
| High | V_{TH} | | | 100 | mV | |
| Low | V_{TL} | -100 | | | mV | |
| Differential Input Voltage | $ V_{ID} $ | 100 | | | mV | See Figure 38 and Table 2 |
| Input Common-Mode Voltage | V_{IC} | $0.5 V_{ID} $ | | $2.4 - 0.5 V_{ID} $ | V | See Figure 38 and Table 2 |
| Input Current, High and Low | I_{IH}, I_{IL} | -5 | | +5 | μA | $D_{INx\pm} = V_{DDx}$ or 0 V , other input = 1.2 V , $V_{DDx} = 2.5 \text{ V}$ or 0 V |
| Differential Input Capacitance ¹ | $C_{INx\pm}$ | | 2 | | pF | $D_{INx\pm} = 0.4 \sin(30 \times 10^6 \pi t) \text{ V} + 0.5 \text{ V}$, other input = 1.2 V^2 |
| OUTPUTS (DRIVERS) | | | | | | |
| Differential Output Voltage | $ V_{OD} $ | 250 | 310 | 450 | mV | See Figure 36 and Figure 37, load resistance (R_L) = 100Ω |
| V_{OD} Magnitude Change | $ \Delta V_{OD} $ | | | 50 | mV | See Figure 36 and Figure 37, $R_L = 100 \Omega$ |
| Offset Voltage | V_{OS} | 1.125 | 1.17 | 1.375 | V | See Figure 36, $R_L = 100 \Omega$ |
| V_{OS} Magnitude Change | ΔV_{OS} | | | 50 | mV | See Figure 36, $R_L = 100 \Omega$ |
| V_{OS} , Peak to Peak ¹ | $V_{OS(PP)}$ | | | 150 | mV | See Figure 36, $R_L = 100 \Omega$ |
| Output Short-Circuit Current | I_{OS} | | | -20 | mA | $D_{OUTx\pm} = 0 \text{ V}$ |
| | | | | 12 | mA | $ V_{OD} = 0 \text{ V}$ |
| Differential Output Capacitance ¹ | $C_{OUTx\pm}$ | | 5 | | pF | $D_{OUTx\pm} = 0.4 \sin(30 \times 10^6 \pi t) \text{ V} + 0.5 \text{ V}$, other input = 1.2 V , V_{DD1} or $V_{DD2} = 0 \text{ V}$ |
| POWER SUPPLY | | | | | | |
| Supply Current | $I_{DD1}, I_{IN1}, I_{DD2}, \text{ or } I_{IN2}$ | | | | | |
| ADN4655/ADN4656 only | | | | 55 | mA | No output load, inputs with 100Ω , no applied $ V_{ID} $ |
| ADN4654 only | | | 58 | 82 | mA | All outputs loaded, $R_L = 100 \Omega$, frequency = 0.55 GHz |
| | | | 50 | 65 | mA | No output load, inputs with 100Ω , $ V_{ID} = 200 \text{ mV}$ |
| | | | 60 | 80 | mA | All outputs loaded, $R_L = 100 \Omega$, frequency = 0.55 GHz |
| LDO Input Range | V_{IN1} or V_{IN2} | 3.0 | 3.3 | 3.6 | V | No external supply on V_{DD1} or V_{DD2} |
| LDO Output Range | V_{DD1} or V_{DD2} | 2.375 | 2.5 | 2.625 | V | |
| Power Supply Ripple Rejection, Phase Spur Level | PSRR | | -75 | | dBc | Phase spur level on $D_{OUTx\pm}$ with 0.55 GHz clock on $D_{INx\pm}$ and applied ripple of 100 kHz , 100 mV p-p on a 2.5 V supply to V_{DD1} or V_{DD2} |
| COMMON-MODE TRANSIENT IMMUNITY³ | | | | | | |
| | $ CM $ | 25 | 50 | | kV/ μs | Common-mode voltage (V_{CM}) = 1000 V , transient magnitude = 800 V |

¹ These specifications are guaranteed by design and characterization.

² t denotes time.

³ $|CM|$ is the maximum common-mode voltage slew rate that can be sustained while maintaining any D_{OUTx+}/D_{OUTx-} pin in the same state as the corresponding D_{INx+}/D_{INx-} pin (no change in output), or producing the expected transition on any D_{OUTx+}/D_{OUTx-} pin if the applied common-mode transient edge is coincident with a data transition on the corresponding D_{INx+}/D_{INx-} pin. The common-mode voltage slew rates apply to both rising and falling common-mode voltage edges.

RECEIVER INPUT THRESHOLD TEST VOLTAGES

Table 2. Test Voltages for Receiver Operation

| Applied Voltages | | Input Voltage, Differential, V_{ID} (V) | Input Voltage, Common-Mode, V_{IC} (V) | Driver Output, Differential V_{OD} (mV) |
|------------------|----------------|---|--|---|
| D_{INx+} (V) | D_{INx-} (V) | | | |
| 1.25 | 1.15 | 0.1 | 1.2 | >250 |
| 1.15 | 1.25 | -0.1 | +1.2 | <-250 |
| 2.4 | 2.3 | 0.1 | 2.35 | >250 |
| 2.3 | 2.4 | -0.1 | +2.35 | <-250 |
| 0.1 | 0 | 0.1 | 0.05 | >250 |
| 0 | 0.1 | -0.1 | +0.05 | <-250 |
| 1.5 | 0.9 | 0.6 | 1.2 | >250 |
| 0.9 | 1.5 | -0.6 | +1.2 | <-250 |
| 2.4 | 1.8 | 0.6 | 2.1 | >250 |
| 1.8 | 2.4 | -0.6 | +2.1 | <-250 |
| 0.6 | 0 | 0.6 | 0.3 | >250 |
| 0 | 0.6 | -0.6 | +0.3 | <-250 |

TIMING SPECIFICATIONS

For all minimum and maximum specifications, $V_{DD1} = V_{DD2} = 2.375$ V to 2.625 V, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. All typical specifications, $V_{DD1} = V_{DD2} = 2.5$ V, $T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 3.

| Parameter | Symbol | Min | Typ | Max ¹ | Unit | Test Conditions/Comments |
|--|--------------------|-----|------|------------------|---------------|---|
| PROPAGATION DELAY | t_{PLH}, t_{PHL} | | 4 | 4.5 | ns | See Figure 39, from any D_{INx+}/D_{INx-} to D_{OUTx+}/D_{OUTx-} |
| SKEW | | | | | | See Figure 39, across all D_{OUTx+}/D_{OUTx-} |
| Duty Cycle ² | $t_{SK(D)}$ | | | 100 | ps | |
| Channel to Channel ³ | $t_{SK(CH)}$ | | 150 | 300 | ps | ADN4654 only |
| | | | 200 | 500 | ps | ADN4655 and ADN4656 only |
| Part to Part ⁴ | $t_{SK(PP)}$ | | | 500 | ps | ADN4654 to ADN4654 only |
| | | | | 600 | ps | ADN4654, ADN4655, ADN4656, or combinations |
| JITTER ⁵ | | | | | | See Figure 39, for any D_{OUTx+}/D_{OUTx-} |
| Random Jitter, RMS ⁶ (1 σ) | $t_{RJ(RMS)}$ | | 2.6 | 4.8 | ps rms | 0.55 GHz clock input |
| Deterministic Jitter, Peak to Peak ^{7,8} | $t_{DJ(PP)}$ | | 50 | 116 | ps | 1.1 Gbps, $2^{23} - 1$ pseudorandom bit stream (PRBS) |
| With Crosstalk | $t_{DJC(PP)}$ | | 50 | | ps | 1.1 Gbps, $2^{23} - 1$ PRBS |
| Total Jitter at Bit Error Rate (BER) 1×10^{-12} | $t_{TJ(PP)}$ | | 90 | 171 | ps | 0.55 GHz, 1.1 Gbps, $2^{23} - 1$ PRBS ⁹ |
| Additive Phase Jitter | t_{ADDJ} | | 387 | | fs rms | 100 Hz to 100 kHz, output frequency (f_{OUT}) = 10 MHz ¹⁰ |
| | | | 288 | | fs rms | 12 kHz to 20 MHz, $f_{OUT} = 0.55$ GHz ¹¹ |
| RISE AND FALL TIME | t_R, t_F | | | 350 | ps | See Figure 39, any D_{OUTx+}/D_{OUTx-} , 20% to 80%, $R_L = 100 \Omega$, load capacitance (C_L) = 5 pF |
| FAIL-SAFE DELAY ¹² | t_{FSH}, t_{FSL} | | 1 | 1.2 | μs | ADN4655 and ADN4656 only; see Figure 39 and Figure 4, any D_{OUTx+}/D_{OUTx-} , $R_L = 100 \Omega$ |
| MAXIMUM DATA RATE | | 1.1 | 1.25 | | Gbps | |

¹ These specifications are guaranteed by design and characterization.

² Duty cycle or pulse skew is the magnitude of the maximum difference between t_{PLH} and t_{PHL} for any channel of a device, that is, $|t_{PLHx} - t_{PHLx}|$, where x denotes either Channel 1 or Channel 2 propagation delay.

³ Channel to channel or output skew is the difference between the largest and smallest values of t_{PHLx} within a device or the difference between the largest and smallest values of t_{PLHx} within a device, whichever of the two is greater.

⁴ Part to part output skew is the difference between the largest and smallest values of t_{PLHx} across multiple devices or the difference between the largest and smallest values of t_{PHLx} across multiple devices, whichever of the two is greater.

⁵ Jitter parameters are guaranteed by design and characterization. Values do not include stimulus jitter. $V_{ID} = 400$ mV p-p, $t_R = t_F = 0.3$ ns (20% to 80%).

⁶ This specification is measured over a population of ~7,000,000 edges.

⁷ Peak-to-peak jitter specifications include jitter due to pulse skew ($t_{SK(D)}$).

⁸ This specification is measured over a population of ~3,000,000 edges.

⁹ Using the formula: $t_{TJ(PP)} = 14 \times t_{RJ(RMS)} + t_{DJ(PP)}$.

¹⁰ With input phase jitter of 250 fs rms subtracted.

¹¹ With input phase jitter of 100 fs rms subtracted.

¹² The fail-safe delay is the delay before D_{OUTx+} is switched high to reflect an idle input to D_{INx+} ($|V_{ID}| < 100$ mV, with open, short, or terminated input condition).

Timing Diagram

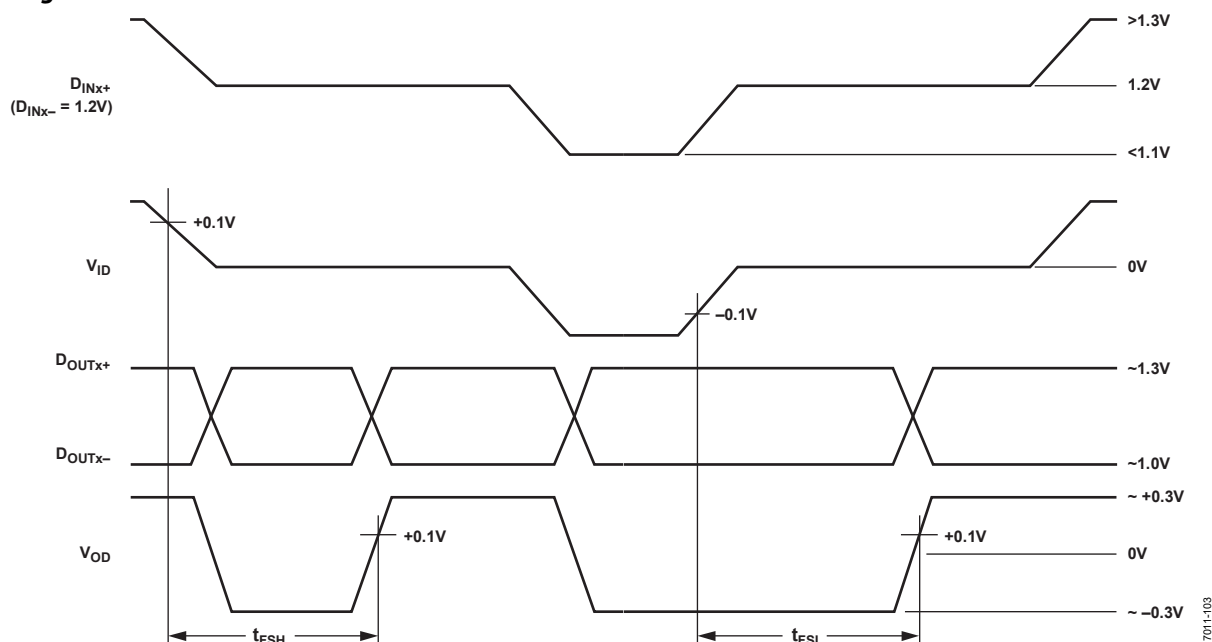


Figure 4. Fail-Safe Timing Diagram

INSULATION AND SAFETY RELATED SPECIFICATIONS

For additional information, see www.analog.com/icouplersafety.

Table 4. 20-Lead SOIC_W Package

| Parameter | Symbol | Value | Unit | Test Conditions/Comments |
|---|---------|-------|--------|--|
| Rated Dielectric Insulation Voltage | | 5 | kV rms | 1 minute duration |
| Minimum External Air Gap (Clearance) | L (I01) | 7.8 | mm min | Measured from input terminals to output terminals, shortest distance through air |
| Minimum External Tracking (Creepage) | L (I02) | 7.8 | mm min | Measured from input terminals to output terminals, shortest distance path along body |
| Minimum Clearance in the Plane of the Printed Circuit Board (PCB Clearance) | L (PCB) | 8.1 | mm min | Measured from input terminals to output terminals, shortest distance through air, line of sight, in the PCB mounting plane |
| Minimum Internal Gap (Internal Clearance) | | 22 | μm min | Insulation distance through insulation |
| Tracking Resistance (Comparative Tracking Index) | CTI | >400 | V | DIN IEC 112/VDE 0303 Part 1 |
| Material Group | | II | | Material Group (DIN VDE 0110, 1/89, Table 1) |

Table 5. 20-Lead SSOP Package

| Parameter | Symbol | Value | Unit | Test Conditions/Comments |
|-------------------------------------|---------|-------|--------|--|
| Rated Dielectric Insulation Voltage | | 3.75 | kV rms | 1 minute duration |
| Minimum Clearance | L (I01) | 5.3 | mm min | Measured from input terminals to output terminals, shortest distance through air |
| Minimum Creepage | L (I02) | 5.3 | mm min | Measured from input terminals to output terminals, shortest distance path along body |
| Minimum PCB Clearance | L (PCB) | 5.6 | mm min | Measured from input terminals to output terminals, shortest distance through air, line of sight, in the PCB mounting plane |
| Minimum Internal Clearance | | 22 | μm min | Insulation distance through insulation |
| Comparative Tracking Index | CTI | >400 | V | DIN IEC 112/VDE 0303 Part 1 |
| Material Group | | II | | Material Group (DIN VDE 0110, 1/89, Table 1) |

PACKAGE CHARACTERISTICS

Table 6.

| Parameter | Symbol | Min | Typ | Max | Unit | Test Conditions/Comments |
|--|------------------|-----|------------------|-----|------|--------------------------|
| Resistance (Input to Output) ¹ | R _{I-O} | | 10 ¹³ | | Ω | Frequency = 1 MHz |
| Capacitance (Input to Output) ¹ | C _{I-O} | | 2.2 | | pF | |
| Input Capacitance ² | C _I | | 3.7 | | pF | |

¹ The device is considered a 2-terminal device: Pin 1 through Pin 10 are shorted together, and Pin 11 through Pin 20 are shorted together.

² Input capacitance is from any input data pin to ground.

REGULATORY INFORMATION

See Table 12 and the Insulation Lifetime section for details regarding recommended maximum working voltages for specific cross-isolation waveforms and insulation levels.

Table 7.

| UL (Pending) | CSA (Pending) | VDE (Pending) |
|--|---|---|
| To Be Recognized Under UL 1577 Component Recognition Program ¹ Single Protection, Isolation Voltage 20-Lead SOIC, 5000 V rms 20-Lead SSOP, 3750 V rms File E214100 | To be approved under CSA Component Acceptance Notice 5A File 205078 | To be certified according to DIN V VDE V 0884-10 (VDE V 0884-10):2006-12 ² Reinforced insulation, V _{IORM} = 424 V _{PEAK} , V _{IOSM} = 8000 V _{PEAK} File 2471900-4880-0001 |

¹ In accordance with UL 1577, each ADN4654/ADN4655/ADN4656 is proof tested by applying an insulation test voltage ≥ 6000 V rms (20-lead SOIC_W) or ≥ 4500 V rms (20-lead SSOP) for 1 sec.

² In accordance with DIN V VDE V 0884-10, each ADN4654/ADN4655/ADN4656 is proof tested by applying an insulation test voltage ≥ 795 V_{PEAK} for 1 sec (partial discharge detection limit = 5 pC).

DIN V VDE V 0884-10 (VDE V 0884-10) INSULATION CHARACTERISTICS (PENDING)

This isolator is suitable for reinforced electrical isolation only within the safety limit data. Protective circuits ensure the maintenance of the safety data.

Table 8.

| Description | Test Conditions/Comments ¹ | Symbol | Characteristic | Unit |
|---|--|-------------|--------------------------------|------------|
| Installation Classification per DIN VDE 0110 For Rated Mains Voltage ≤ 150 V rms For Rated Mains Voltage ≤ 300 V rms For Rated Mains Voltage ≤ 600 V rms | | | I to IV I to IV I to III | |
| Climatic Classification | | | 40/125/21 | |
| Pollution Degree per DIN VDE 0110, Table 1 | | | 2 | |
| Maximum Working Insulation Voltage | | V_{IORM} | 424 | V_{PEAK} |
| Input to Output Test Voltage, Method B1 | $V_{IORM} \times 1.875 = V_{PD(M)}$, 100% production test, $t_{INI} = t_M = 1$ sec, partial discharge < 5 pC | $V_{PD(M)}$ | 795 | V_{PEAK} |
| Input to Output Test Voltage, Method A After Environmental Tests Subgroup 1 | $V_{IORM} \times 1.5 = V_{PD(M)}$, $t_{INI} = 60$ sec, $t_M = 10$ sec, partial discharge < 5 pC | $V_{PD(M)}$ | 636 | V_{PEAK} |
| After Input or Safety Test Subgroup 2 and Subgroup 3 | $V_{IORM} \times 1.2 = V_{PD(M)}$, $t_{INI} = 60$ sec, $t_M = 10$ sec, partial discharge < 5 pC | | 509 | V_{PEAK} |
| Highest Allowable Overvoltage | | V_{IOTM} | 7000 | V_{PEAK} |
| Surge Isolation Voltage | | | | |
| Basic | $V_{PEAK} = 12.8$ kV, 1.2 μ s rise time, 50 μ s, 50% fall time | V_{IOSM} | 10,000 | V_{PEAK} |
| Reinforced | $V_{PEAK} = 12.8$ kV, 1.2 μ s rise time, 50 μ s, 50% fall time | V_{IOSM} | 8000 | V_{PEAK} |
| Safety Limiting Values | Maximum value allowed in the event of a failure (see Figure 5) | | | |
| Maximum Junction Temperature | | T_S | 150 | °C |
| Total Power Dissipation at 25°C | | P_S | 2.78 | W |
| 20-Lead SOIC | | | 1.8 | W |
| 20-Lead SSOP | | | >10 ⁹ | Ω |
| Insulation Resistance at T_S | $V_{IO} = 500$ V | R_S | | |

¹ For information about t_M , t_{INI} , and V_{IO} , see DIN V VDE V 0884-10.

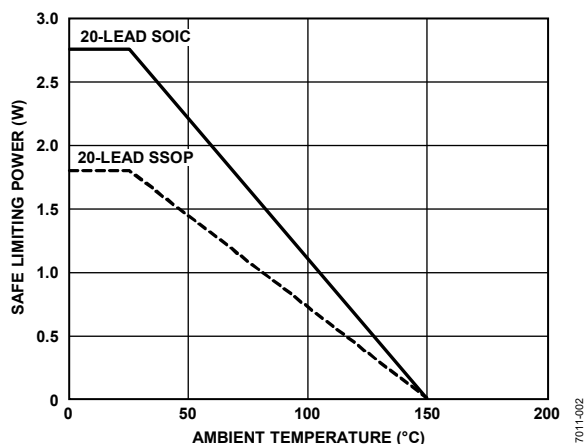


Figure 5. Thermal Derating Curve, Dependence of Safety Limiting Values with Ambient Temperature per DIN V VDE V 0884-10

RECOMMENDED OPERATING CONDITIONS**Table 9.**

| Parameter | Symbol | Rating |
|--|--------------------|--------------------|
| Operating Temperature | T_A | −40°C to +125°C |
| Supply Voltages | | |
| Supply to LDO Regulator | V_{IN1}, V_{IN2} | 3.0 V to 3.6 V |
| LDO Bypass, V_{INx} Shorted to V_{DDx} | V_{DD1}, V_{DD2} | 2.375 V to 2.625 V |

ABSOLUTE MAXIMUM RATINGS

Table 10.

| Parameter | Rating |
|---|---|
| V_{IN1} to GND ₁ / V_{IN2} to GND ₂ | −0.3 V to +6.5 V |
| V_{DD1} to GND ₁ / V_{DD2} to GND ₂ | −0.3 V to +2.8 V |
| Input Voltage (D_{INx+} , D_{INx-}) to GND _x on the Same Side | −0.3 V to $V_{DD} + 0.3$ V |
| Output Voltage (D_{OUTx+} , D_{OUTx-}) to GND _x on the Same Side | −0.3 V to $V_{DD} + 0.3$ V |
| Short-Circuit Duration (D_{OUTx+} , D_{OUTx-}) to GND _x on the Same Side | Continuous |
| Operating Temperature Range | −40°C to +125°C |
| Storage Temperature Range | −65°C to +150°C |
| Junction Temperature (T_J Maximum) | 150°C |
| Power Dissipation | $(T_J \text{ maximum} - T_A)/\theta_{JA}$ |
| Electrostatic Discharge (ESD) | |
| Human Body Model (All Pins to Respective GND _x , 1.5 k Ω , 100 pF) | ±4 kV |
| IEC 61000-4-2 (LVDS Pins to Isolated GND _x Across Isolation Barrier) | |
| 20-Lead SOIC | ±8 kV |
| 20-Lead SSOP | ±7 kV |

Stresses at or above those listed under Absolute Maximum Ratings may cause permanent damage to the product. This is a stress rating only; functional operation of the product at these or any other conditions above those indicated in the operational section of this specification is not implied. Operation beyond the maximum operating conditions for extended periods may affect product reliability.

Table 12. Maximum Continuous Working Voltage¹

| Parameter | Rating | | Constraint |
|-----------------------|------------------------|-----------------------|--|
| | RW-20 | RS-20 | |
| AC Voltage | | | |
| Bipolar Waveform | | | |
| Basic Insulation | 424 V _{PEAK} | 424 V _{PEAK} | 50-year minimum insulation lifetime for 1% failure |
| Reinforced Insulation | 424 V _{PEAK} | 424 V _{PEAK} | 50-year minimum insulation lifetime for 1% failure |
| Unipolar Waveform | | | |
| Basic Insulation | 848 V _{PEAK} | 848 V _{PEAK} | 50-year minimum insulation lifetime for 1% failure |
| Reinforced Insulation | 875 V _{PEAK} | 620 V _{PEAK} | Lifetime limited by package creepage, maximum approved working voltage |
| DC Voltage | | | |
| Basic Insulation | 1079 V _{PEAK} | 754 V _{PEAK} | Lifetime limited by package creepage, maximum approved working voltage |
| Reinforced Insulation | 536 V _{PEAK} | 380 V _{PEAK} | Lifetime limited by package creepage, maximum approved working voltage |

¹ The maximum continuous working voltage refers to the continuous voltage magnitude imposed across the isolation barrier. See the Insulation Lifetime section for more details.

THERMAL RESISTANCE

Thermal performance is directly linked to PCB design and operation environment. Close attention to PCB thermal design is required.

θ_{JA} is the natural convection junction to ambient thermal resistance measured in a one-cubic foot sealed enclosure.

Table 11. Thermal Resistance

| Package Type ¹ | θ_{JA} | Unit |
|---------------------------|---------------|------|
| RW-20 | 45.7 | °C/W |
| RS-20 | 69.6 | °C/W |

¹ Test Condition 1: thermal impedance simulated with 4-layer standard JEDEC PCB.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS




Figure 6. ADN4654 Pin Configuration

Table 13. ADN4654 Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|------------|--------------------|---|
| 1 | V _{IN1} | Optional 3.3 V Power Supply and LDO Input for Side 1. Bypass V _{IN1} to GND ₁ using a 1 μ F capacitor. Alternatively, if using a 2.5 V supply, connect V _{IN1} directly to V _{DD1} . |
| 2, 4, 10 | GND ₁ | Ground, Side 1. |
| 3, 9 | V _{DD1} | 2.5 V Power Supply for Side 1. Connect both pins externally and bypass to GND ₁ with 0.1 μ F capacitors. If supplying 3.3 V to V _{IN1} , connect a 1 μ F capacitor between Pin 3 and GND ₁ for proper regulation of the 2.5 V output of the internal LDO regulator. |
| 5 | D _{IN1+} | Noninverted Differential Input 1. |
| 6 | D _{IN1-} | Inverted Differential Input 1. |
| 7 | D _{IN2+} | Noninverted Differential Input 2. |
| 8 | D _{IN2-} | Inverted Differential Input 2. |
| 11, 17, 19 | GND ₂ | Ground, Side 2. |
| 12, 18 | V _{DD2} | 2.5 V Power Supply for Side 2. Connect both pins externally and bypass to GND ₂ with 0.1 μ F capacitors. If supplying 3.3 V to V _{IN2} , connect a 1 μ F capacitor between Pin 18 and GND ₂ for proper regulation of the 2.5 V output of the internal LDO regulator. |
| 13 | D _{OUT2-} | Inverted Differential Output 2. |
| 14 | D _{OUT2+} | Noninverted Differential Output 2. |
| 15 | D _{OUT1-} | Inverted Differential Output 1. |
| 16 | D _{OUT1+} | Noninverted Differential Output 1. |
| 20 | V _{IN2} | Optional 3.3 V Power Supply and LDO Input for Side 2. Bypass V _{IN2} to GND ₂ using a 1 μ F capacitor. Alternatively, if using a 2.5 V supply, connect V _{IN2} directly to V _{DD2} . |




Figure 7. ADN4655 Pin Configuration

Table 14. ADN4655 Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|------------|--------------------|---|
| 1 | V _{IN1} | Optional 3.3 V Power Supply and LDO Input for Side 1. Bypass V _{IN1} to GND ₁ using a 1 μ F capacitor. Alternatively, if using a 2.5 V supply, connect V _{IN1} directly to V _{DD1} . |
| 2, 4, 10 | GND ₁ | Ground, Side 1. |
| 3, 9 | V _{DD1} | 2.5 V Power Supply for Side 1. Connect both pins externally and bypass to GND ₁ with 0.1 μ F capacitors. If supplying 3.3 V to V _{IN1} , connect a 1 μ F capacitor between Pin 3 and GND ₁ for proper regulation of the 2.5 V output of the internal LDO regulator. |
| 5 | D _{IN1+} | Noninverted Differential Input 1. |
| 6 | D _{IN1-} | Inverted Differential Input 1. |
| 7 | D _{OUT2+} | Noninverted Differential Output 2. |
| 8 | D _{OUT2-} | Inverted Differential Output 2. |
| 11, 17, 19 | GND ₂ | Ground, Side 2. |
| 12, 18 | V _{DD2} | 2.5 V Power Supply for Side 2. Connect both pins externally and bypass to GND ₂ with 0.1 μ F capacitors. If supplying 3.3 V to V _{IN2} , connect a 1 μ F capacitor between Pin 18 and GND ₂ for proper regulation of the 2.5 V output of the internal LDO regulator. |
| 13 | D _{IN2-} | Inverted Differential Input 2. |
| 14 | D _{IN2+} | Noninverted Differential Input 2. |
| 15 | D _{OUT1-} | Inverted Differential Output 1. |
| 16 | D _{OUT1+} | Noninverted Differential Output 1. |
| 20 | V _{IN2} | Optional 3.3 V Power Supply and LDO Input for Side 2. Bypass V _{IN2} to GND ₂ using a 1 μ F capacitor. Alternatively, if using a 2.5 V supply, connect V _{IN2} directly to V _{DD2} . |




Figure 8. ADN4656 Pin Configuration

Table 15. ADN4656 Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|------------|--------------------|---|
| 1 | V _{IN1} | Optional 3.3 V Power Supply and LDO Input for Side 1. Bypass V _{IN1} to GND ₁ using a 1 μ F capacitor. Alternatively, if using a 2.5 V supply, connect V _{IN1} directly to V _{DD1} . |
| 2, 4, 10 | GND ₁ | Ground, Side 1. |
| 3, 9 | V _{DD1} | 2.5 V Power Supply for Side 1. Connect both pins externally and bypass to GND ₁ with 0.1 μ F capacitors. If supplying 3.3 V to V _{IN1} , connect a 1 μ F capacitor between Pin 3 and GND ₁ for proper regulation of the 2.5 V output of the internal LDO regulator. |
| 5 | D _{OUT1+} | Noninverted Differential Output 1. |
| 6 | D _{OUT1-} | Inverted Differential Output 1. |
| 7 | D _{IN2+} | Noninverted Differential Input 2. |
| 8 | D _{IN2-} | Inverted Differential Input 2. |
| 11, 17, 19 | GND ₂ | Ground, Side 2. |
| 12, 18 | V _{DD2} | 2.5 V Power Supply for Side 2. Connect both pins externally and bypass to GND ₂ with 0.1 μ F capacitors. If supplying 3.3 V to V _{IN2} , connect a 1 μ F capacitor between Pin 18 and GND ₂ for proper regulation of the 2.5 V output of the internal LDO regulator. |
| 13 | D _{OUT2-} | Inverted Differential Output 2. |
| 14 | D _{OUT2+} | Noninverted Differential Output 2. |
| 15 | D _{IN1-} | Inverted Differential Input 1. |
| 16 | D _{IN1+} | Noninverted Differential Input 1. |
| 20 | V _{IN2} | Optional 3.3 V Power Supply and LDO Input for Side 2. Bypass V _{IN2} to GND ₂ using a 1 μ F capacitor. Alternatively, if using a 2.5 V supply, connect V _{IN2} directly to V _{DD2} . |

TYPICAL PERFORMANCE CHARACTERISTICS

$V_{DD1} = V_{DD2} = 2.5$ V, $T_A = 25^\circ\text{C}$, $R_L = 100\ \Omega$, 0.55 GHz input with $|V_{ID}| = 200$ mV, and $V_{IC} = 1.1$ V for ADN4654, unless otherwise noted.

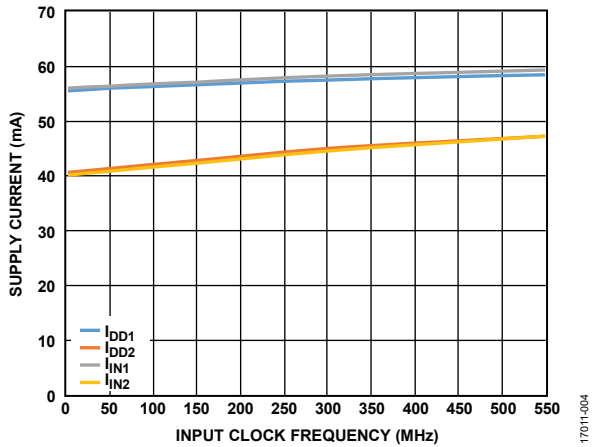


Figure 9. Supply Current vs. Input Clock Frequency
($D_{IN1\pm}$ Switching, $D_{IN2\pm}$ Not Switching)

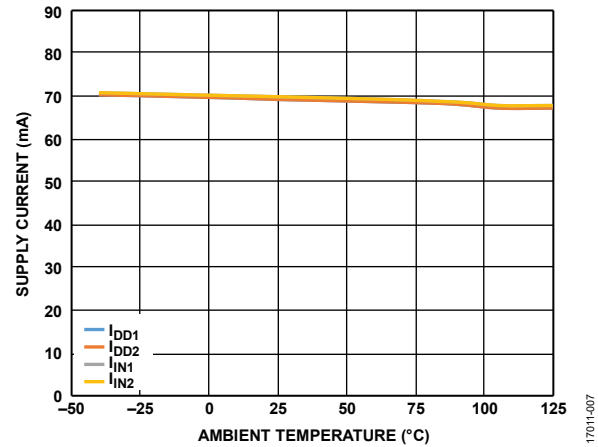


Figure 12. Supply Current vs. Ambient Temperature
($D_{IN1\pm}$ and $D_{IN2\pm}$ with 550 MHz Clock Inputs)

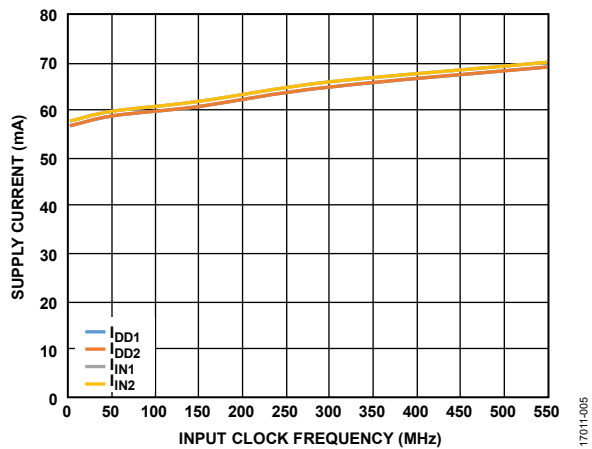


Figure 10. Supply Current vs. Input Clock Frequency
($D_{IN1\pm}$ and $D_{IN2\pm}$ Switching)

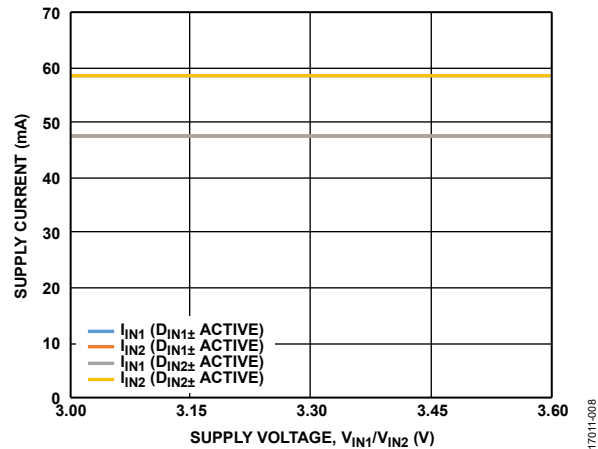


Figure 13. Supply Current vs. Supply Voltage, V_{IN1}/V_{IN2}

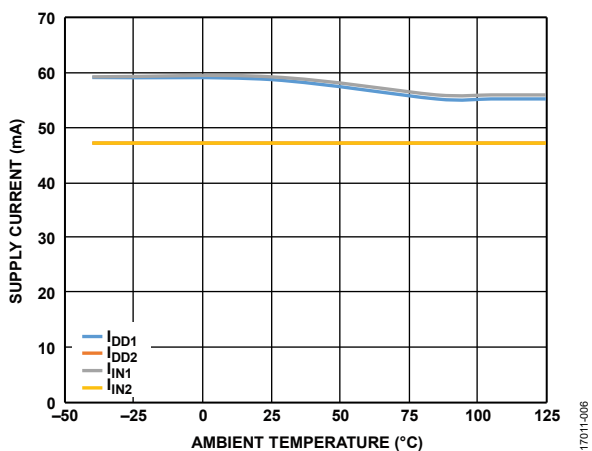


Figure 11. Supply Current vs. Ambient Temperature
($D_{IN1\pm}$ with 550 MHz Clock Input, $D_{IN2\pm}$ Not Switching)

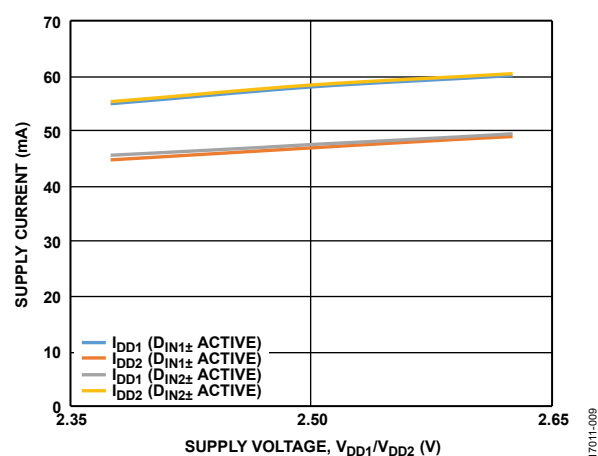


Figure 14. Supply Current vs. Supply Voltage, V_{DD1}/V_{DD2}

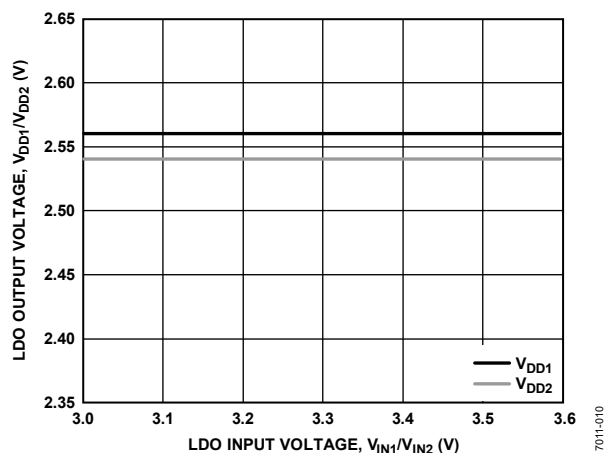
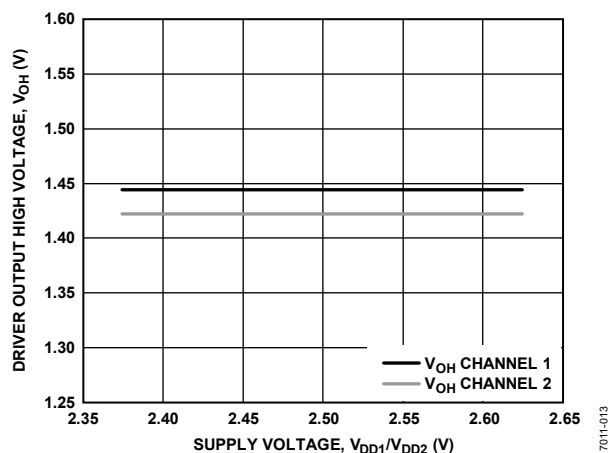
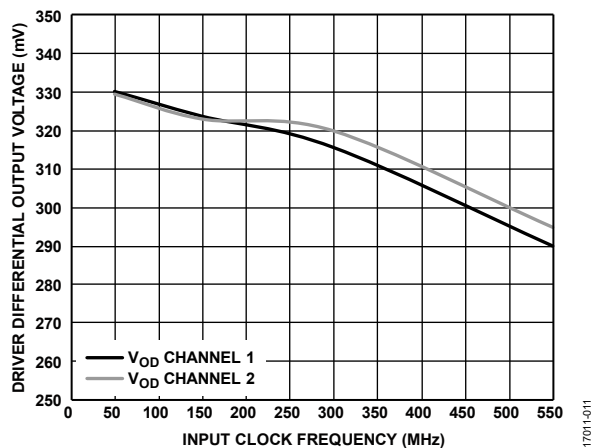
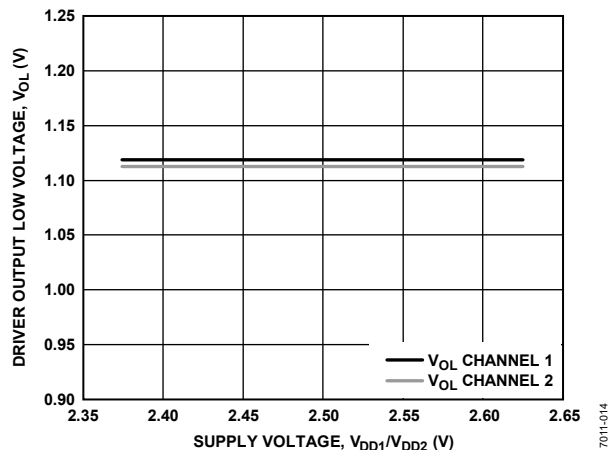
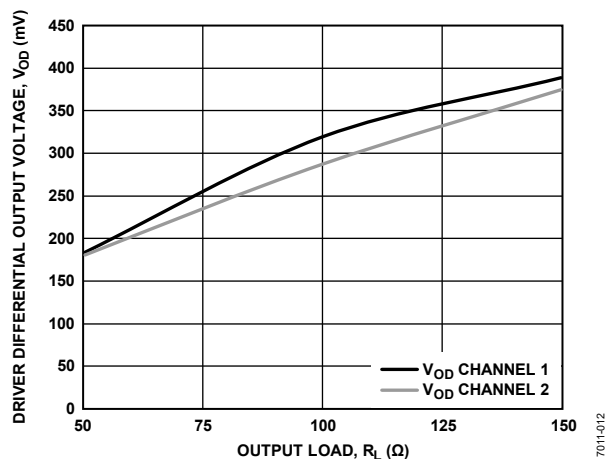
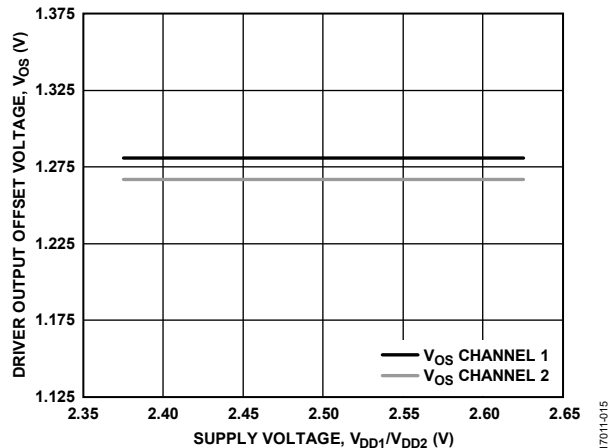
Figure 15. LDO Output Voltage, V_{DD1}/V_{DD2} vs. LDO Input Voltage, V_{IN1}/V_{IN2} Figure 18. Driver Output High Voltage, V_{OH} vs. Supply Voltage, V_{DD1}/V_{DD2} 

Figure 16. Driver Differential Output Voltage vs. Input Clock Frequency

Figure 19. Driver Output Low Voltage, V_{OL} vs. Supply Voltage, V_{DD1}/V_{DD2} Figure 17. Driver Differential Output Voltage, V_{OD} vs. Output Load, R_L Figure 20. Driver Output Offset Voltage, V_{OS} vs. Supply Voltage, V_{DD1}/V_{DD2}

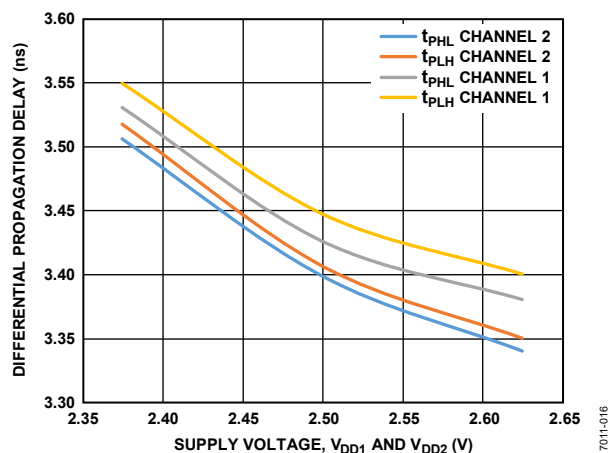
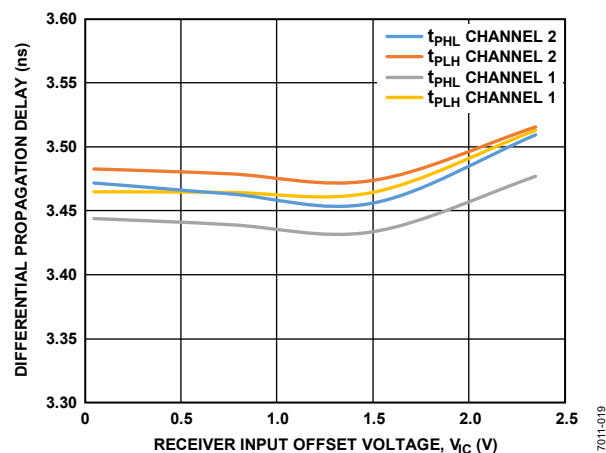
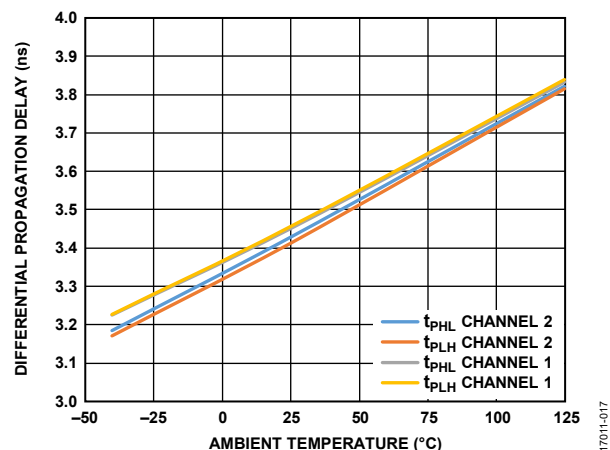
Figure 21. Differential Propagation Delay vs. Supply Voltage, V_{DD1} and V_{DD2} Figure 24. Differential Propagation Delay vs. Receiver Input Offset Voltage, V_{IC} 

Figure 22. Differential Propagation Delay vs. Ambient Temperature

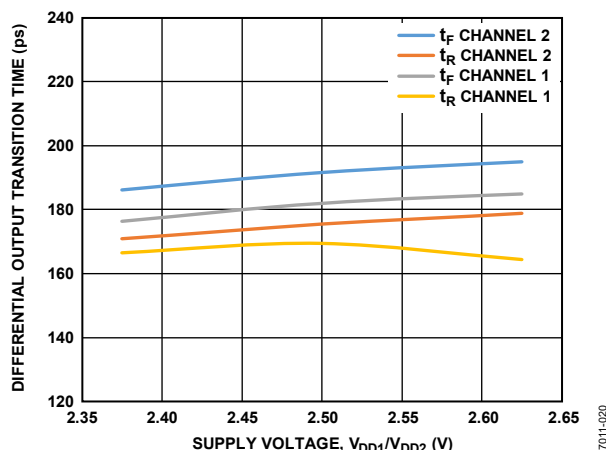
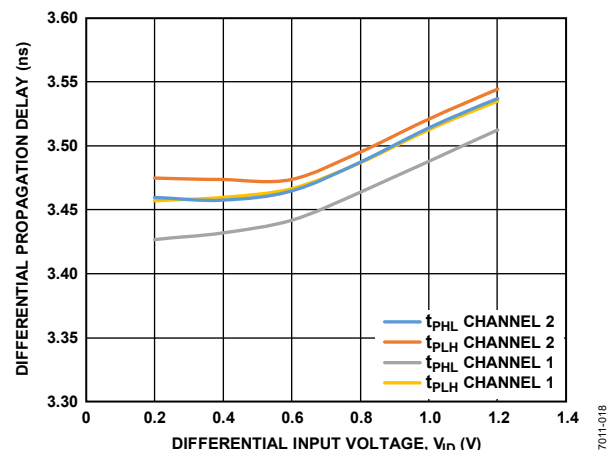
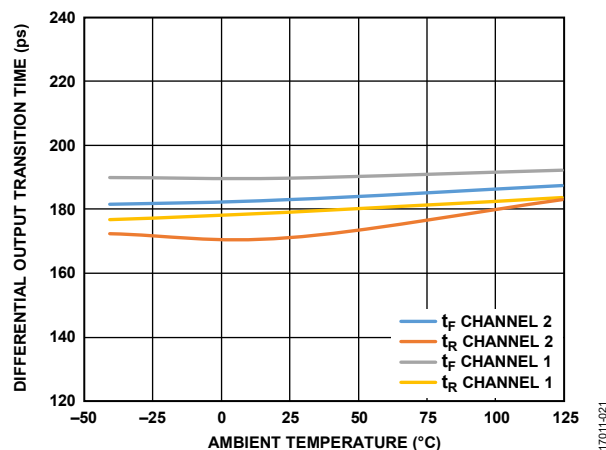
Figure 25. Differential Output Transition Time vs. Supply Voltage, V_{DD1}/V_{DD2} Figure 23. Differential Propagation Delay vs. Differential Input Voltage, V_{ID} 

Figure 26. Differential Output Transition Time vs. Ambient Temperature

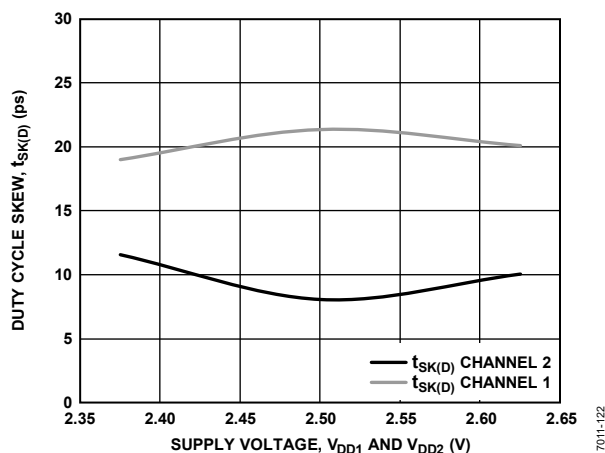
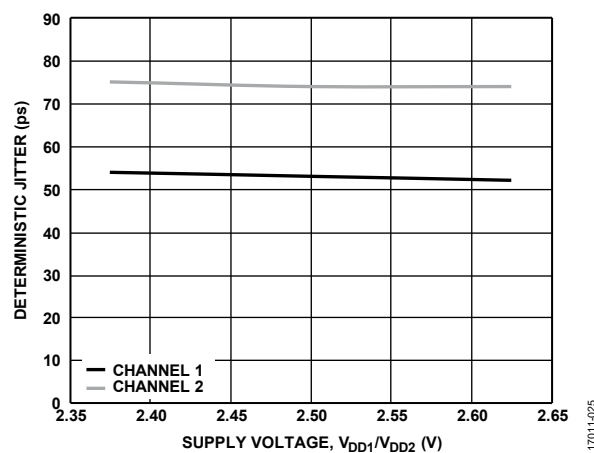
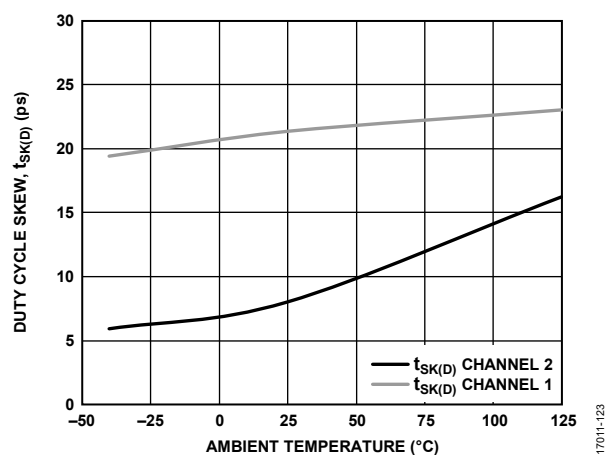
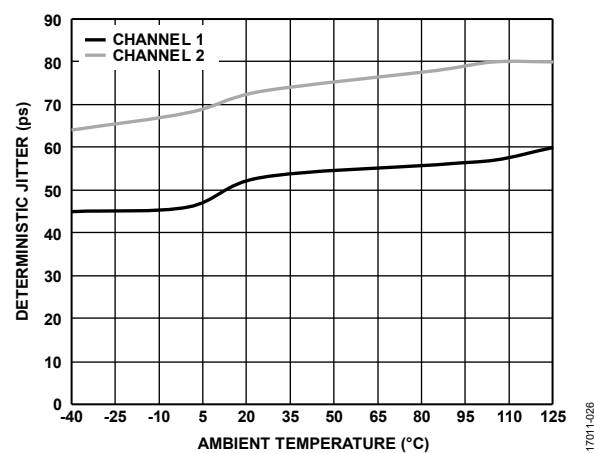
Figure 27. Duty Cycle Skew, $t_{SK(D)}$ vs. Supply Voltage, V_{DD1} and V_{DD2} Figure 30. Deterministic Jitter vs. Supply Voltage, V_{DD1}/V_{DD2} Figure 28. Duty Cycle Skew, $t_{SK(D)}$ vs. Ambient Temperature

Figure 31. Deterministic Jitter vs. Ambient Temperature

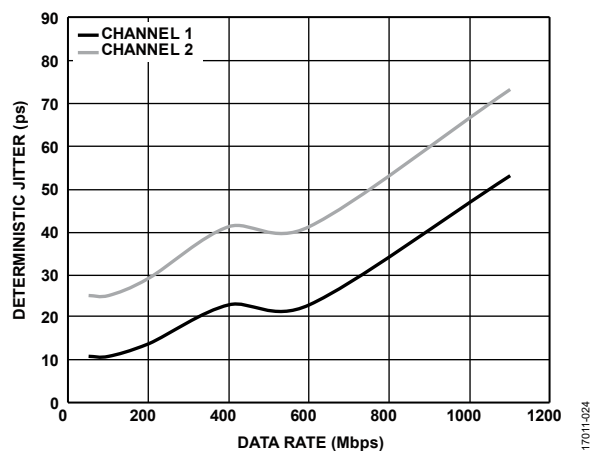
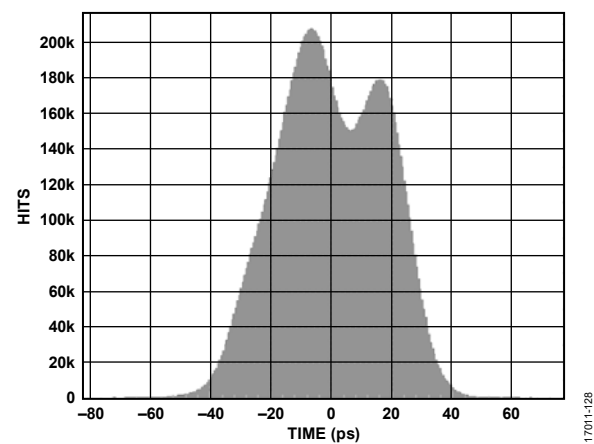


Figure 29. Deterministic Jitter vs. Data Rate

Figure 32. Time Interval Error (TIE) Histogram for $D_{OUT1\pm}$ at 550 MHz

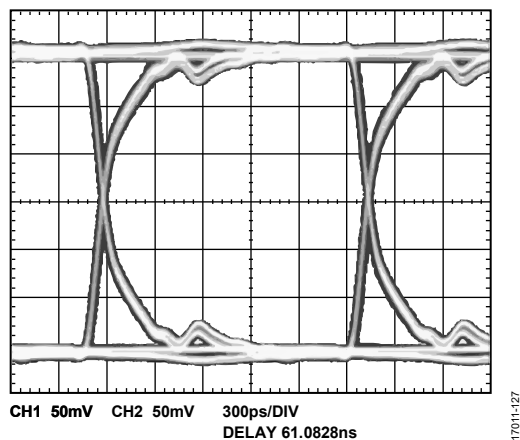


Figure 33. Eye Diagram for $D_{OUT1\pm}$ at 300 MHz

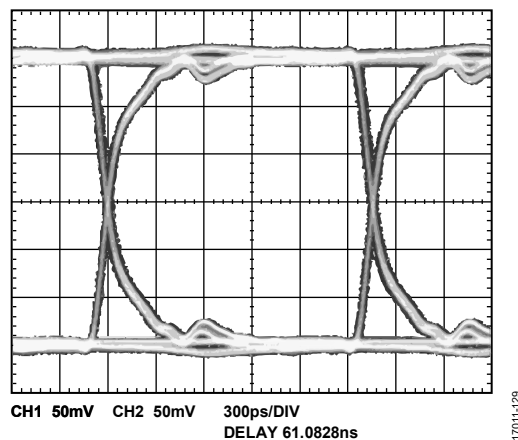


Figure 35. Eye Diagram for $D_{OUT2\pm}$ at 300 MHz

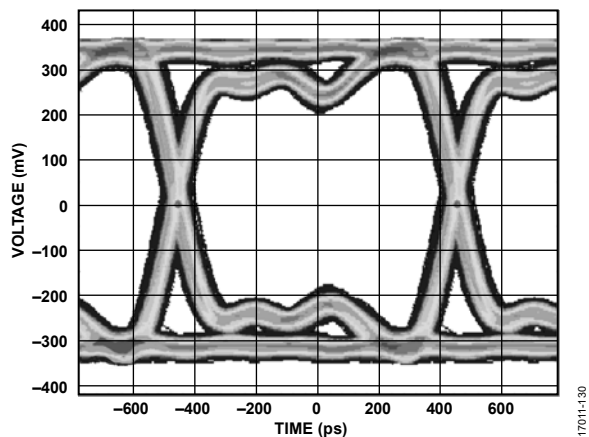


Figure 34. Eye Diagram for $D_{OUT1\pm}$ at 550 MHz

TEST CIRCUITS AND SWITCHING CHARACTERISTICS


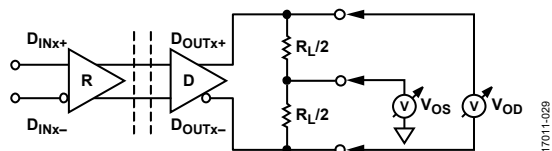



Figure 36. Driver Test Circuit

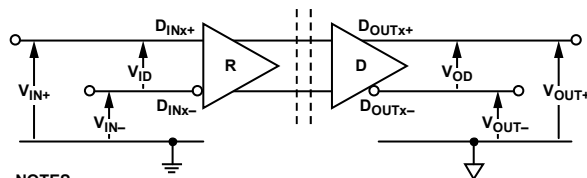

NOTES

1. $V_{ID} = V_{IN+} - V_{IN-}$
2. $V_{IC} = (V_{IN+} + V_{IN-})/2$
3. $V_{OD} = V_{OUT+} - V_{OUT-}$
4. $V_{OS} = (V_{OUT+} + V_{OUT-})/2$

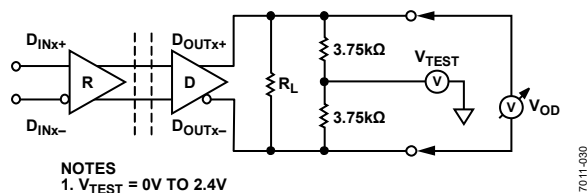
Figure 38. Voltage Definitions



NOTES

1. $V_{TEST} = 0V$ TO $2.4V$

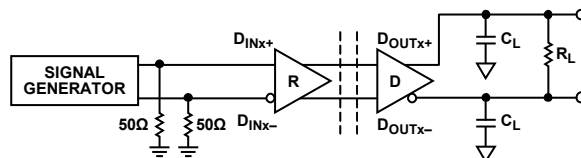Figure 37. Driver Test Circuit (Full Load Across Common-Mode Range)



NOTES

1. C_L INCLUDES PROBE AND JIG CAPACITANCE.

Figure 39. Timing Test Circuit

THEORY OF OPERATION

The ADN4654/ADN4655/ADN4656 are TIA/EIA-644-A LVDS compliant isolated buffers. LVDS signals applied to the inputs are transmitted on the outputs of the buffer, and galvanic isolation is integrated between the two sides of the device. This integration allows drop-in isolation of the LVDS signal chains.

The LVDS receiver detects the differential voltage present across a termination resistor on an LVDS input. An integrated digital isolator transmits the input state across the isolation barrier, and an LVDS driver outputs the same state as the input.

When there is a positive differential voltage of ≥ 100 mV across any $D_{INx\pm}$ pin, the corresponding D_{OUTx+} pin sources current. This current flows across the connected transmission line and termination at the receiver at the far end of the bus, while D_{OUTx-} sinks the return current. When there is a negative differential voltage of ≤ -100 mV across any $D_{INx\pm}$ pin, the corresponding D_{OUTx+} pin sinks current and the D_{OUTx-} pin sources current. Table 16 and Table 17 show these input and output combinations.

The output drive current is between ± 2.5 mA and ± 4.5 mA (typically ± 3.1 mA), developing between ± 250 mV and ± 450 mV across a $100\ \Omega$ termination resistor (R_T). The received voltage is centered around 1.2 V. Because the differential voltage (V_{ID}) reverses polarity, the peak-to-peak voltage swing across R_T is twice the differential voltage magnitude ($|V_{ID}|$).

TRUTH TABLE AND FAIL-SAFE RECEIVER

The LVDS standard, TIA/EIA-644-A, defines normal receiver operation under two conditions: an input differential voltage of $\geq +100$ mV corresponding to one logic state, and a voltage of ≤ -100 mV for the other logic state. Between these thresholds, standard LVDS receiver operation is undefined (the LVDS receiver

can detect either state), as shown in Table 16 for the ADN4654. The ADN4655/ADN4656 incorporates a fail-safe circuit to ensure that the LVDS outputs are in a known state (logic high) when the input state is undefined ($-100\text{ mV} < V_{ID} < +100\text{ mV}$), as shown in Table 17.

This input state occurs when the inputs are floating (unconnected with no termination resistor), shorted, or when there is no active driver connected to the inputs with a termination resistor present. Open-circuit, short-circuit, and terminated or idle bus fail-safes, respectively, ensure a known output state for these conditions, as implemented by the ADN4655/ADN4656.

After these input states ($-100\text{ mV} < V_{ID} < +100\text{ mV}$) trigger the fail-safe circuit, there is a delay of up to $1.2\ \mu\text{s}$ before the output is guaranteed to be high ($V_{OD} \geq 250\text{ mV}$). During this time, the output may transition to, or stay in, a logic low state ($V_{OD} \leq -250\text{ mV}$).

The fail-safe circuit triggers as soon as the input differential voltage remains between $+100\text{ mV}$ and -100 mV for some nanoseconds. Therefore, very slow rise and fall times on the input signal, outside typical LVDS operation (350 ps maximum t_R/t_F), can potentially trigger the fail-safe circuit on a high to low crossover.

At the minimum $|V_{ID}|$ of 100 mV for normal operation, the rise and fall time must be $\leq 5\text{ ns}$ to avoid triggering a fail-safe state. Increasing $|V_{ID}|$ to 200 mV allows an input rise and fall time of up to 10 ns without triggering a fail-safe state. For speed applications with restricting data rates less than 30 Mbps , where slow high to low transitions in excess of this limit are expected, use external biasing resistors to introduce a minimum $|V_{ID}|$ of 100 mV if the fail-safe cannot trigger.

Table 16. ADN4654 Input and Output Operation

| Input ($D_{INx\pm}$) | | | Output ($D_{OUTx\pm}$) | | |
|------------------------|------------------------|---------------|--------------------------|---------------|---------------|
| Powered On | V_{ID} (mV) | Logic | Powered On | V_{OD} (mV) | Logic |
| Yes | ≥ 100 | High | Yes | ≥ 250 | High |
| Yes | ≤ -100 | Low | Yes | ≤ -250 | Low |
| Yes | $-100 < V_{ID} < +100$ | Indeterminate | Yes | Indeterminate | Indeterminate |
| No | Don't care | Don't care | Yes | ≥ 250 | High |

Table 17. ADN4655/ADN4656 Input and Output Operation

| Input ($D_{INx\pm}$) | | | Output ($D_{OUTx\pm}$) | | |
|------------------------|------------------------|---------------|--------------------------|---------------|-------|
| Powered On | V_{ID} (mV) | Logic | Powered On | V_{OD} (mV) | Logic |
| Yes | ≥ 100 | High | Yes | ≥ 250 | High |
| Yes | ≤ -100 | Low | Yes | ≤ -250 | Low |
| Yes | $-100 < V_{ID} < +100$ | Indeterminate | Yes | ≥ 250 | High |
| No | Don't care | Don't care | Yes | ≥ 250 | High |

ISOLATION

In response to any change in the input state detected by the integrated LVDS receiver, an encoder circuit sends narrow (~ 1 ns) pulses to a decoder circuit using integrated transformer coils. The decoder is bistable and is, therefore, either set or reset by the pulses that indicate input transitions. The decoder state determines the LVDS driver output state in normal operation, which reflects the isolated LVDS buffer input state.

In the absence of input transitions for more than approximately $1\ \mu\text{s}$, a periodic set of refresh pulses, indicative of the correct input state, ensures dc correctness at the output (including the fail-safe output state, if applicable).

On power-up, the output state may initially be in the incorrect dc state if there are no input transitions. The output state is corrected within $1\ \mu\text{s}$ by the refresh pulses.

If the decoder receives no internal pulses for more than approximately $1\ \mu\text{s}$, the device assumes that the input side is unpowered or nonfunctional, in which case, the output is set to a positive differential voltage (logic high).

APPLICATIONS INFORMATION

PCB LAYOUT

The ADN4654/ADN4655/ADN4656 can operate with high speed LVDS signals up to 0.55 GHz clock, or 1.1 Gbps nonreturn to zero (NRZ) data. When operating with such high frequencies, apply best practices for the LVDS trace layout and termination. Place a 100 Ω termination resistor as close as possible to the receiver, across the D_{INx+} and D_{INx-} pins.

Controlled 50 Ω impedance traces are needed on LVDS signal lines for full signal integrity, reduced system jitter, and minimizing electromagnetic interference (EMI) from the PCB. Trace widths, lateral distance within each pair, and distance to the ground plane underneath all must be chosen appropriately. Via fencing to the PCB ground between pairs is also a best practice to minimize crosstalk between adjacent pairs.

The ADN4654/ADN4655/ADN4656 pass EN 55022 Class B emissions limits without extra considerations required for the isolator when operating with up to 1.1 Gbps PRBS data. When isolating high speed clocks (for example, 0.55 GHz), a reduced PCB clearance (isolation gap) may be required with the 20-lead SOIC_W model to reduce dipole antenna effects and provide sufficient margin below Class B emissions limits.

The best practice for high speed PCB design avoids any other emissions from PCBs in applications that use the ADN4654/ADN4655/ADN4656. Take care when configuring off-board connections, where switching transients from high speed LVDS signals (clocks in particular) can conduct onto cabling, resulting in radiated emissions. Use common-mode chokes, ferrites, or other filters as appropriate at the LVDS connectors, as well as cable shield or PCB ground connections to earth or chassis.

The ADN4654/ADN4655/ADN4656 require appropriate decoupling of the V_{DDx} pins with 100 nF capacitors. If the integrated LDO regulator is not used, and a 2.5 V supply is connected directly, connect the appropriate V_{INx} pin to the supply as well, as shown in Figure 40, using the ADN4654 as an example.

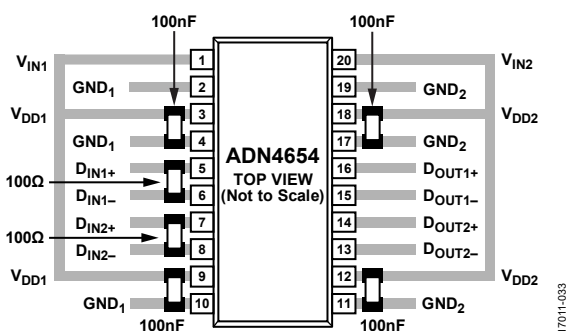


Figure 40. Required PCB Layout When Not Using LDO Regulator (2.5 V Supply)

When the integrated LDO regulator is used, bypass capacitors of 1 μ F are required on the V_{INx} pins and on the nearest V_{DDx} pins (LDO output), as shown in Figure 41.

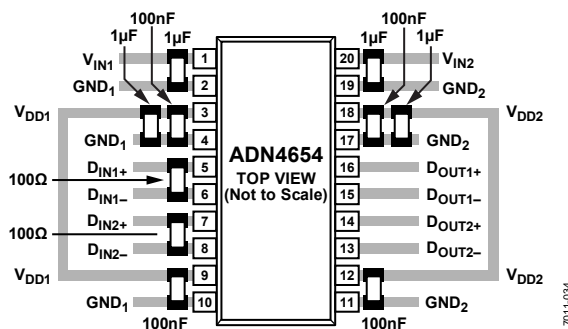


Figure 41. Required PCB Layout When Using LDO Regulator (3.3 V Supply)

APPLICATION EXAMPLES

High speed LVDS interfaces for the analog front-end (AFE), processor to processor communication, or video and imaging data can be isolated using the ADN4654, as an example, between components, between boards, or at a cable interface. The ADN4654 provides the galvanic isolation required for robust external ports, and the low jitter and high drive strength of the device allow communication along short cable runs of a few meters. High common-mode immunity ensures communication integrity even in harsh, noisy environments, and isolation can protect against electromagnetic compatibility (EMC) transients up to ± 8 kV peak, such as ESD, electrical fast transient (EFT), and surge. The ADN4654 can isolate a range of video and imaging protocols, including protocols that use current mode logic (CML) rather than LVDS for the physical layer. One example is High-Definition Multimedia Interface (HDMI), where ac coupling and biasing and termination resistor networks are used as shown in Figure 42 to convert between CML (used by the transition minimized differential signaling (TMDS) data and clock lanes) and the LVDS levels required by the ADN4654. Additional Analog Devices isolator components, such as the [ADuM1250/ADuM1251](#) I²C isolators, can be used to isolate control signals and power ([ADuM5020](#) isoPower integrated, isolated dc-to-dc converter). This circuit supports resolutions up to 720p.

Other circuits can use the ADN4654 for isolating MIPI CSI-2, DisplayPort, and LVDS-based protocols such as FPD-Link. Use of a field-programmable gate array (FPGA) or an application-specific integrated circuit (ASIC) serializer/deserializer (SERDES) expands bandwidth through multiple ADN4654 devices to support 1080p or 4K video resolutions, providing an alternative to short reach fiber links.

MAGNETIC FIELD IMMUNITY

The limitation on the magnetic field immunity of the device is set by the condition in which the induced voltage in the transformer receiving coil is sufficiently large, either to falsely set or reset the decoder. The following analysis defines such conditions. The ADN4654/ADN4655/ADN4656 are examined in a 2.375 V operating condition because this operating condition represents the most susceptible mode of operation for these products.

The pulses at the transformer output have an amplitude greater than 0.5 V. The decoder has a sensing threshold of about 0.25 V, therefore establishing a 0.25 V margin in which induced voltages are tolerated. The voltage (V) induced across the receiving coil is given by

$$V = (-d\beta/dt)\Sigma\pi r_n^2; n = 1, 2, \dots, N$$

where:

$d\beta$ is the change in magnetic flux density.

dt is the change in time.

r_n is the radius of the n^{th} turn in the receiving coil.

N is the number of turns in the receiving coil.

Given the geometry of the receiving coil in the ADN4654/ADN4655/ADN4656 and an imposed requirement that the induced voltage be, at most, 50% of the 0.25 V margin at the decoder, a maximum allowable external magnetic flux density is calculated as shown in Figure 43.

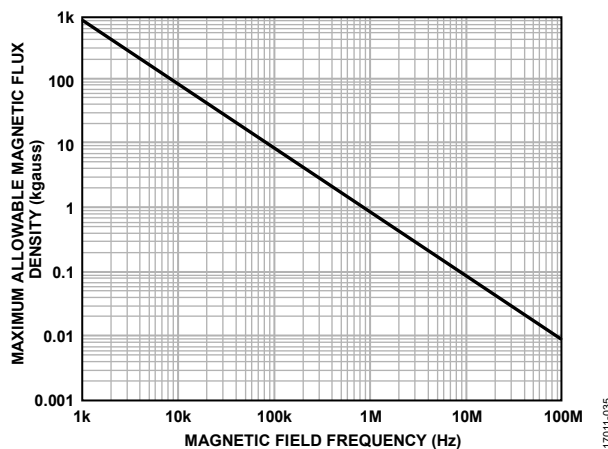


Figure 43. Maximum Allowable External Magnetic Flux Density

For example, at a magnetic field frequency of 1 MHz, the maximum allowable magnetic field of 0.92 kgauss induces a voltage of 0.125 V at the receiving coil. This voltage is about 50% of the sensing threshold and does not cause a faulty output transition. If such an event occurs with the worst case polarity during a transmitted pulse, the applied magnetic field reduces the received pulse from >0.5 V to 0.375 V. This voltage is still higher than the 0.25 V sensing threshold of the decoder.

The preceding magnetic flux density values correspond to specific current magnitudes at given distances from the ADN4654/ADN4655/ADN4656 transformers. Figure 44 expresses these allowable current magnitudes as a function of frequency for selected distances. The ADN4654/ADN4655/ADN4656 are

insensitive to external fields. Only extremely large, high frequency currents that are close to the component can potentially be a concern. For the 1 MHz example noted, a 2.29 kA current must be placed 5 mm from the ADN4654/ADN4655/ADN4656 to affect component operation.

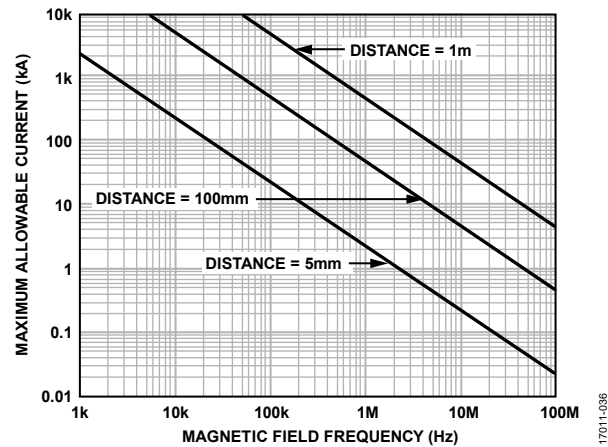


Figure 44. Maximum Allowable Current for Various Current to ADN4654 Spacings

In combinations of strong magnetic field and high frequency, any loops formed by PCB traces can induce sufficiently large error voltages to trigger the thresholds of succeeding circuitry. Avoid PCB structures that form loops.

INSULATION LIFETIME

All insulation structures eventually break down when subjected to voltage stress over a sufficiently long period. The rate of insulation degradation is dependent on the characteristics of the voltage waveform applied across the insulation as well as on the materials and material interfaces.

The two types of insulation degradation of primary interest are breakdown along surfaces exposed to the air and insulation wear out. Surface breakdown is the phenomenon of surface tracking and the primary determinant of surface creepage requirements in system level standards. Insulation wear out is the phenomenon where charge injection or displacement currents inside the insulation material cause long-term insulation degradation.

Surface Tracking

Surface tracking is addressed in electrical safety standards by setting a minimum surface creepage based on the working voltage, the environmental conditions, and the properties of the insulation material. Safety agencies perform characterization testing on the surface insulation of components, which allows the components to be categorized in different material groups. Lower material group ratings are more resistant to surface tracking and, therefore, can provide adequate lifetime with smaller creepage. The minimum creepage for a given working voltage and material group is in each system level standard and is based on the total rms voltage across the isolation barrier, pollution degree, and material group. The material group and creepage for ADN4654/ADN4655/ADN4656 are detailed in Table 4 and Table 5.

Insulation Wear Out

The lifetime of insulation caused by wear out is determined by the thickness of the insulation, material properties, and the voltage stress applied. It is important to verify that the product lifetime is adequate at the application working voltage. The working voltage supported by an isolator for wear out may not be the same as the working voltage supported for tracking. The working voltage applicable to tracking is specified in most standards.

Testing and modeling show that the primary driver of long-term degradation is displacement current in the polyimide insulation causing incremental damage. The stress on the insulation can be broken down into broad categories, such as dc stress, which causes little wear out because there is no displacement current, and an ac component time varying voltage stress, which causes wear out.

The ratings in certification documents are usually based on 60 Hz sinusoidal stress because this type of waveform reflects isolation from line voltage. However, many practical applications have combinations of 60 Hz ac and dc across the isolation barrier, as shown in Equation 1. Because only the ac portion of the stress causes wear out, the equation can be rearranged to solve for the ac rms voltage, as shown in Equation 2. For insulation wear out with the polyimide materials used in this product, the ac rms voltage determines the product lifetime.

$$V_{RMS} = \sqrt{V_{AC\ RMS}^2 + V_{DC}^2} \quad (1)$$

or

$$V_{AC\ RMS} = \sqrt{V_{RMS}^2 - V_{DC}^2} \quad (2)$$

where:

V_{RMS} is the total rms working voltage.

$V_{AC\ RMS}$ is the time varying portion of the working voltage.

V_{DC} is the dc offset of the working voltage.

Calculation and Use of Parameters Example

The following example frequently arises in power conversion applications. Assume that the line voltage on one side of the isolation is 240 V ac rms and a 400 V dc bus voltage is present on the other side of the isolation barrier. The isolator material is polyimide. To establish the critical voltages in determining the

creepage, clearance, and lifetime of a device, see Figure 45 and the following equations.

The working voltage across the barrier from Equation 1 is

$$V_{RMS} = \sqrt{V_{AC\ RMS}^2 + V_{DC}^2}$$

$$V_{RMS} = \sqrt{240^2 + 400^2}$$

$$V_{RMS} = 466\text{ V}$$

This V_{RMS} value is the working voltage used together with the material group and pollution degree when looking up the creepage required by a system standard.

To determine if the lifetime is adequate, obtain the time varying portion of the working voltage. To obtain the ac rms voltage, use Equation 2.

$$V_{AC\ RMS} = \sqrt{V_{RMS}^2 - V_{DC}^2}$$

$$V_{AC\ RMS} = \sqrt{466^2 - 400^2}$$

$$V_{AC\ RMS} = 240\text{ V rms}$$

In this case, the ac rms voltage is simply the line voltage of 240 V rms. This calculation is more relevant when the waveform is not sinusoidal. Table 12 compares the value to the limits for the working voltage for the expected lifetime. Note that the dc working voltage limit in Table 12 is set by the creepage of the package as specified in IEC 60664-1. This value can differ for specific system level standards.

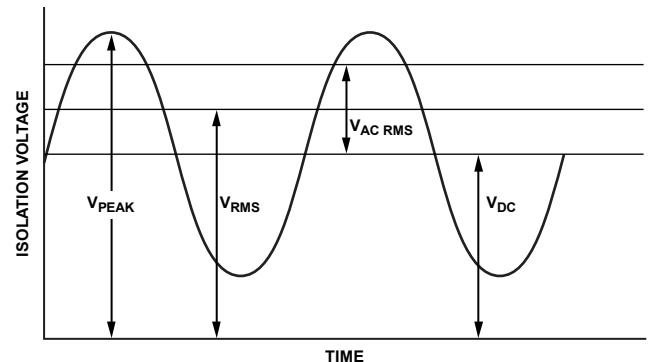


Figure 45. Critical Voltage Example

17011-037

OUTLINE DIMENSIONS


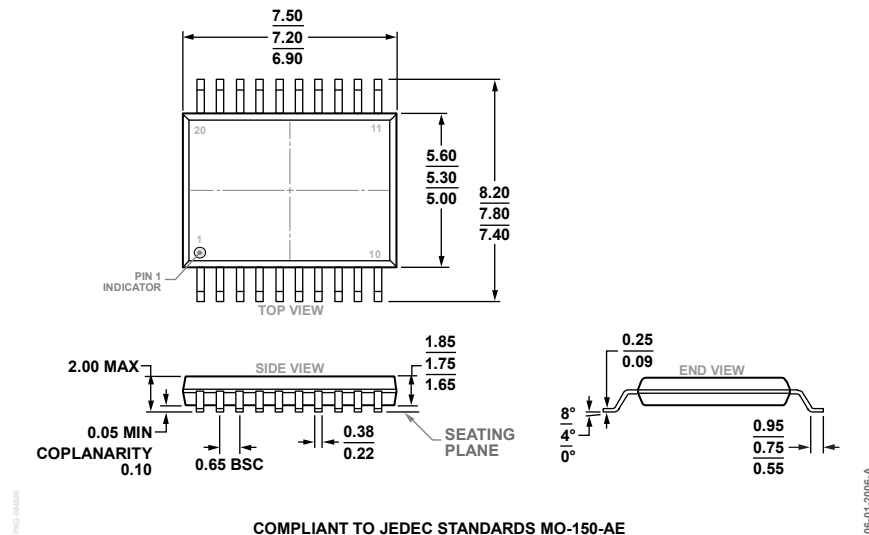


Figure 46. 20-Lead Shrink Small Outline Package [SSOP]
(RS-20)

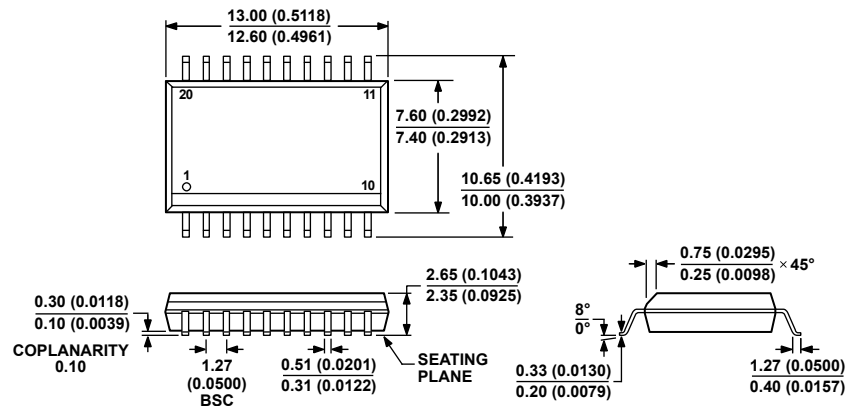Dimensions shown in millimeters



CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

Figure 47. 20-Lead Standard Small Outline Package [SOIC_W]
Wide Body
(RW-20)

Dimensions shown in millimeters and (inches)

ORDERING GUIDE

| Model ¹ | Temperature Range | Package Description | Package Option |
|--------------------|-------------------|--|----------------|
| ADN4654BRSZ | −40°C to +125°C | 20-Lead Shrink Small Outline Package [SSOP] | RS-20 |
| ADN4654BRSZ-RL7 | −40°C to +125°C | 20-Lead Shrink Small Outline Package [SSOP] | RS-20 |
| ADN4654BRWZ | −40°C to +125°C | 20-Lead Wide Body, Standard Small Outline Package [SOIC_W] | RW-20 |
| ADN4654BRWZ-RL7 | −40°C to +125°C | 20-Lead Wide Body, Standard Small Outline Package [SOIC_W] | RW-20 |
| ADN4655BRSZ | −40°C to +125°C | 20-Lead Shrink Small Outline Package [SSOP] | RS-20 |
| ADN4655BRSZ-RL7 | −40°C to +125°C | 20-Lead Shrink Small Outline Package [SSOP] | RS-20 |
| ADN4655BRWZ | −40°C to +125°C | 20-Lead Wide Body, Standard Small Outline Package [SOIC_W] | RW-20 |
| ADN4655BRWZ-RL7 | −40°C to +125°C | 20-Lead Wide Body, Standard Small Outline Package [SOIC_W] | RW-20 |
| ADN4656BRSZ | −40°C to +125°C | 20-Lead Shrink Small Outline Package [SSOP] | RS-20 |
| ADN4656BRSZ-RL7 | −40°C to +125°C | 20-Lead Shrink Small Outline Package [SSOP] | RS-20 |
| ADN4656BRWZ | −40°C to +125°C | 20-Lead Wide Body, Standard Small Outline Package [SOIC_W] | RW-20 |
| ADN4656BRWZ-RL7 | −40°C to +125°C | 20-Lead Wide Body, Standard Small Outline Package [SOIC_W] | RW-20 |
| EVAL-ADN4654EBZ | | ADN4654 SSOP Evaluation Board | |
| EVAL-ADN4654EB1Z | | ADN4654 SOIC_W Evaluation Board | |
| EVAL-ADN4655EBZ | | ADN4655 SSOP Evaluation Board | |
| EVAL-ADN4655EB1Z | | ADN4655 SOIC_W Evaluation Board | |
| EVAL-ADN4656EBZ | | ADN4656 SSOP Evaluation Board | |
| EVAL-ADN4656EB1Z | | ADN4656 SOIC_W Evaluation Board | |

¹ Z = RoHS Compliant Part.

I²C refers to a communications protocol originally developed by Philips Semiconductors (now NXP Semiconductors).