

4

3




2

1

THIS DRAWING IS UNPUBLISHED.
RELEASED FOR PUBLICATION
20
© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
IN	00		A	INITIAL RELEASE	05JAN2006	DJH JWH
			B	REVISED PER ECR 06-023043	06OCT2006	DLD LLV

- 1 SHELL: ZINC.
OUTER CONTACT: COPPER.
RETAINING RING: BRASS.
DIELECTRIC: POLYESTER PBT, CURRY.
- 2 SHELL: 2.0µm MIN TIN OVER 1.0µm MIN NICKEL, BOTH OVER 5.08µm MIN COPPER.
OUTER CONTACT: 3.75µm MIN TIN OVER 1.27µm MIN NICKEL.
RETAINING RING: 2.03µm MIN TIN OVER 1.27µm MIN NICKEL.
- 3 PLUG SUBASSEMBLY ACCEPTS JACK SUBASSEMBLIES MEETING DIN 72594-1,
ROAD VEHICLES - RADIO FREQUENCY INTERFACE - DIMENSIONS AND ELECTRICAL REQUIREMENTS.
4. SEE INSTRUCTION SHEET 408-10028.

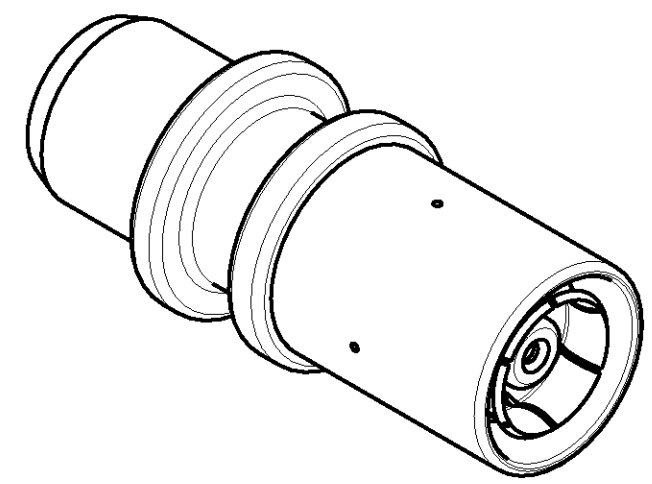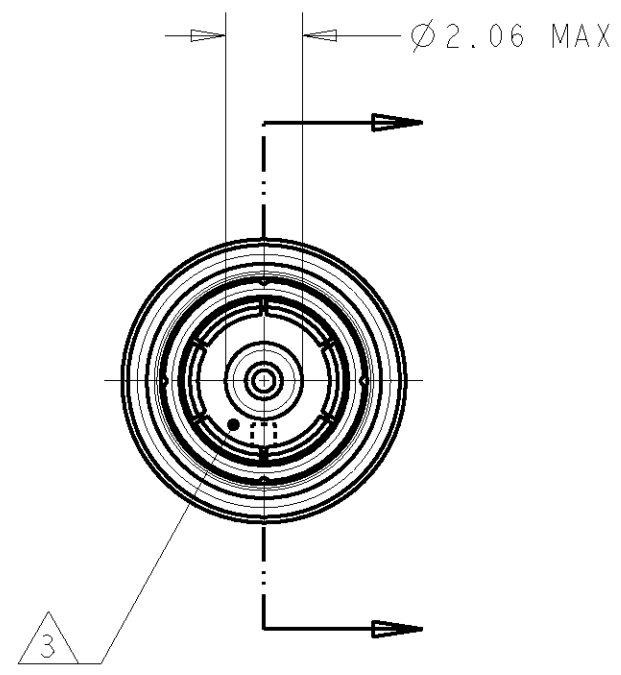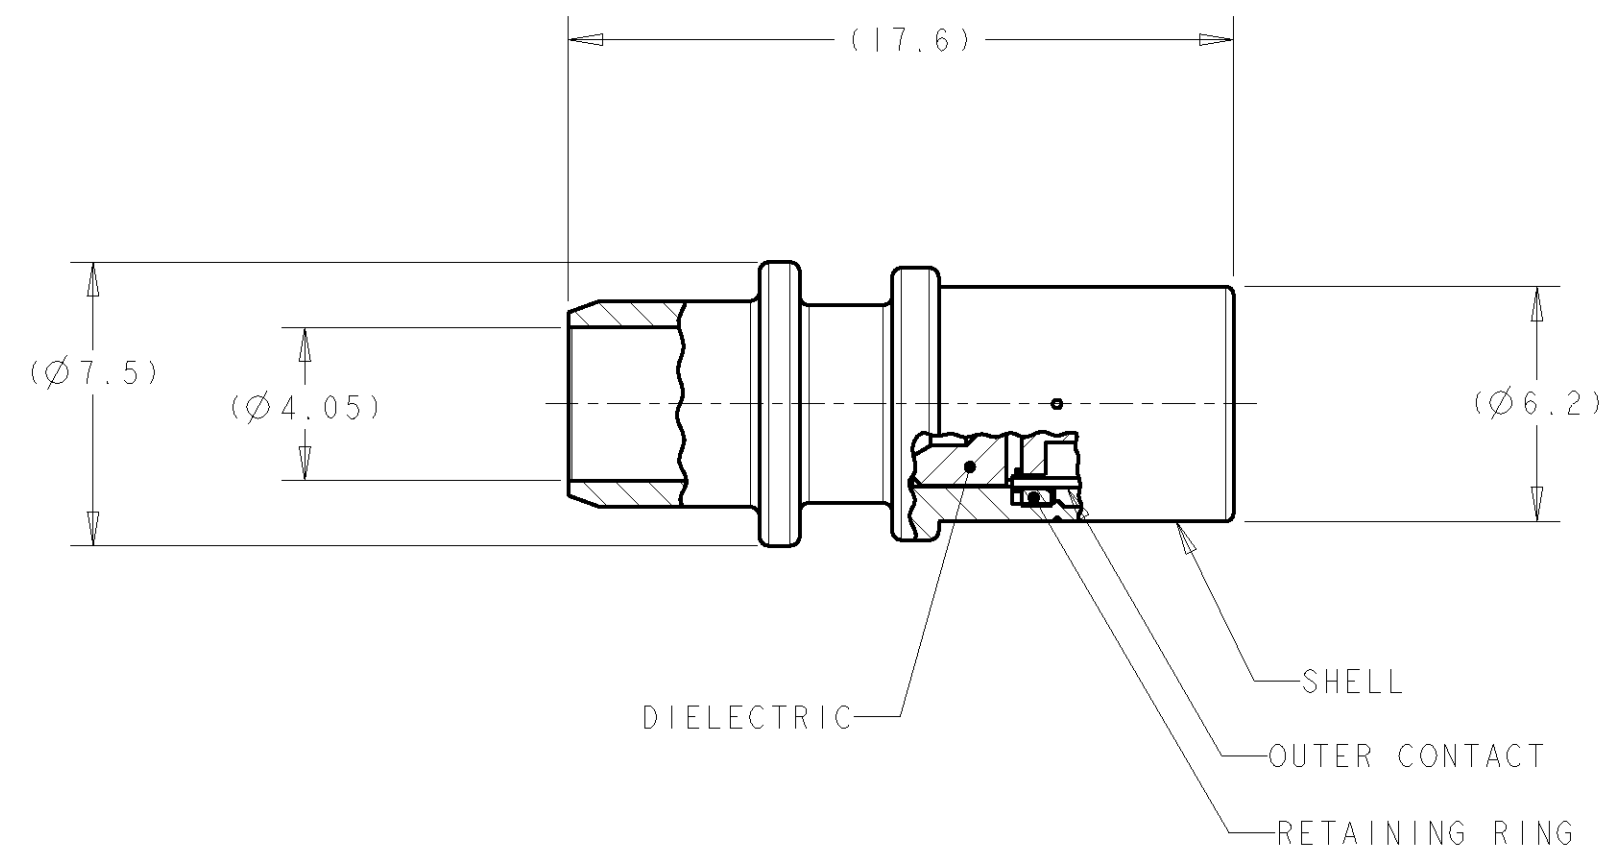

ISOMETRIC VIEW

1438895-1
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN D. J. HARDY 05JAN2006	tyco Electronics Tyco Electronics Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK J. W. HALL 05JAN2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. W. HALL 05JAN2006	NAME PLUG SUBASSEMBLY, RG-59, RG-62, RG-62U/M, RG-71 OR RG-71U/M, SMB	
0 PLC ±-		PRODUCT SPEC	SIZE	
1 PLC ±-		APPLICATION SPEC	CAGE CODE	
2 PLC ±-		114-13157	DRAWING NO	
3 PLC ±-		WEIGHT	A300779	
4 PLC ±-		CUSTOMER DRAWING	C=1438895	
ANGLES ±-			RESTRICTED TO	
FINISH			SCALE	
1			5:1	
2			SHEET	
			OF	
			REV	
			B	