THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
FT	0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	REVISED PER ECO-11-023039	18FEB12	KH	MS

MECHANICAL:
HOUSING: THERMOPLASTIC, UL94V-2, BLACK.
TERMINALS: BRASS, BRIGHT TIN PLATE.
SCREWS: 6-32, STEEL, PLATED .0002 MIN ZINC W/ CLEAR CHROMATE COATING. UNLESS OTHERWISE SPECIFIED.
TIGHTENING TORQUE: 8 IN-LB.

ELECTRICAL:
MAXIMUM CURRENT: 20A.
OPERATING VOLTAGE: 600V.
WIRE RANGE: 12-22 AWG.

ENVIRONMENTAL:
OPERATING TEMP.: -60°C TO 105°C

1 ALL SCREWS BOTTOMED, TORQUE 2 TO 4 IN-LBS

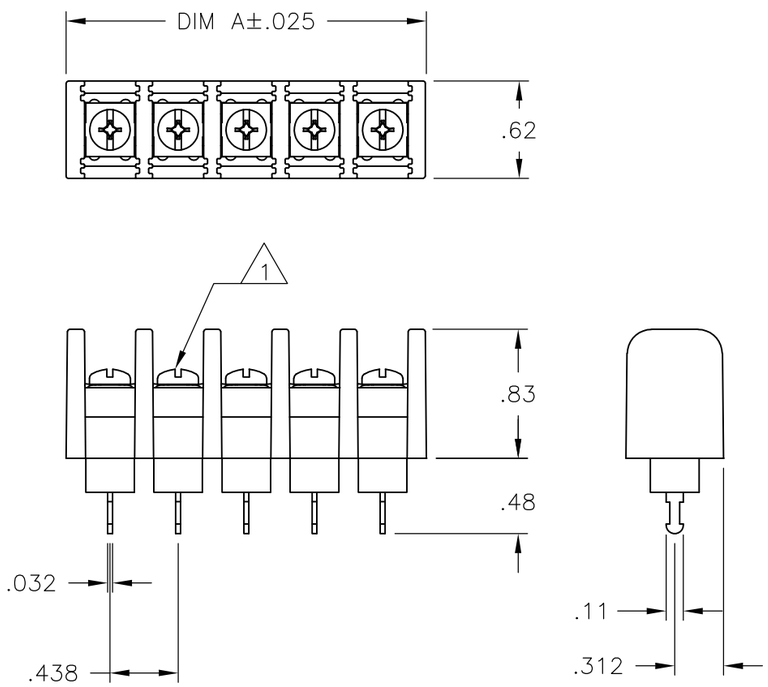

DIM A	NO. OF POS.	CATALOG NUMBER	PART NUMBER
11.937	27	SSB7TP270101	2-1776858-7
11.500	26	SSB7TP260101	2-1776858-6
11.062	25	SSB7TP250101	2-1776858-5
10.625	24	SSB7TP240101	2-1776858-4
10.187	23	SSB7TP230101	2-1776858-3
9.750	22	SSB7TP220101	2-1776858-2
9.312	21	SSB7TP210101	2-1776858-1
8.875	20	SSB7TP200101	2-1776858-0
8.437	19	SSB7TP190101	1-1776858-9
8.000	18	SSB7TP180101	1-1776858-8
7.562	17	SSB7TP170101	1-1776858-7
7.125	16	SSB7TP160101	1-1776858-6
6.687	15	SSB7TP150101	1-1776858-5
6.250	14	SSB7TP140101	1-1776858-4
5.812	13	SSB7TP130101	1-1776858-3
5.375	12	SSB7TP120101	1-1776858-2
4.937	11	SSB7TP110101	1-1776858-1
4.500	10	SSB7TP100101	1-1776858-0
4.062	9	SSB7TP090101	1776858-9
3.625	8	SSB7TP080101	1776858-8
3.187	7	SSB7TP070101	1776858-7
2.750	6	SSB7TP060101	1776858-6
2.312	5	SSB7TP050101	1776858-5
1.875	4	SSB7TP040101	1776858-4
1.437	3	SSB7TP030101	1776858-3
1.000	2	SSB7TP020101	1776858-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± .02
3 PLC	± .010
4 PLC	± -
ANGLES	± 1°

MATERIAL -
FINISH -

DWN S SCHLGEL 6/12/06
CHK S YODER 6/12/06
APVD S YODER 6/12/06
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME SSB7TPXX0101

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1776858	—

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	B