


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED PER ECO-17-003325	20APR2017	AP	DG



D

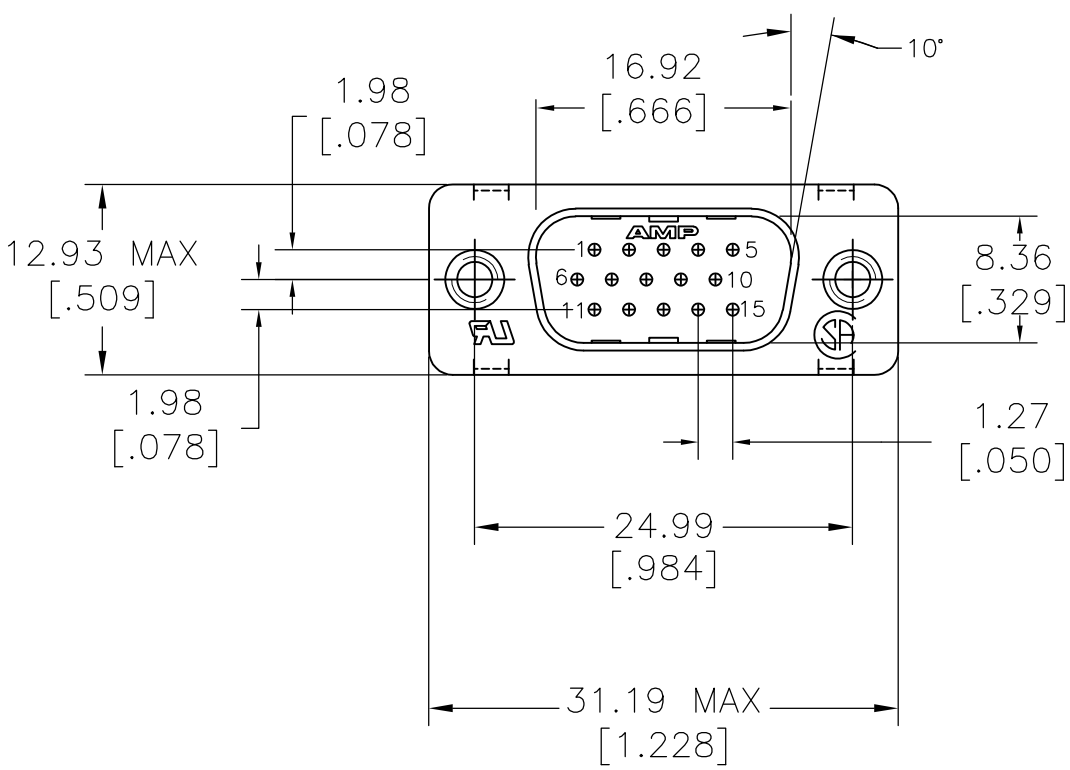

- 1 PLUG ACCEPTS SIZE 22 DF PIN CONTACTS (CONTACTS MUST BE ORDERED SEPERATELY).
- 2 ALL PARTS SHIPPED UNASSEMBLED, EACH PART INDIVIDUALLY BULK PACKED.
- 3 MOLDED PARTS: FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
SHELLS AND CLINCH NUTS: CARBON STEEL
SHIELDS : STAINLESS STEEL.
- 4 SHELLS: 0.0508[.000200] MIN TIN OVER 0.0254[.000100] MIN COPPER.
CLINCH NUTS: ZINC PER ASTM B 633, TYPE II, CLASS SCI, CLEAR CHROMATE.

C

B

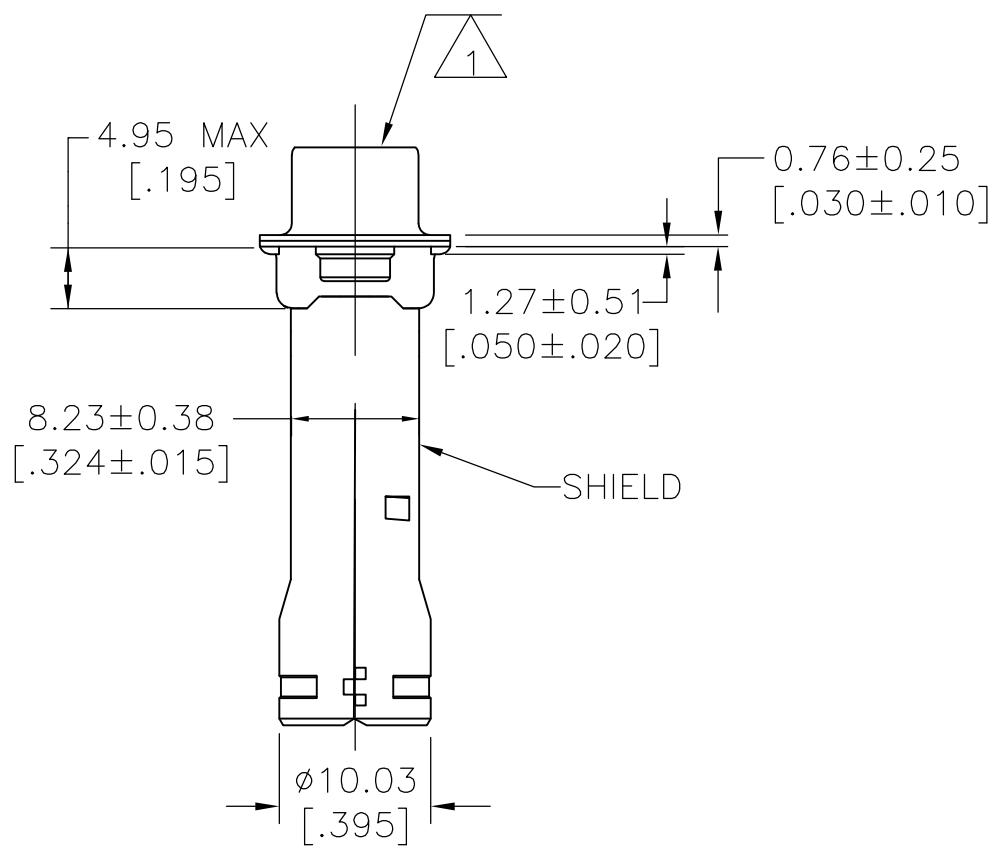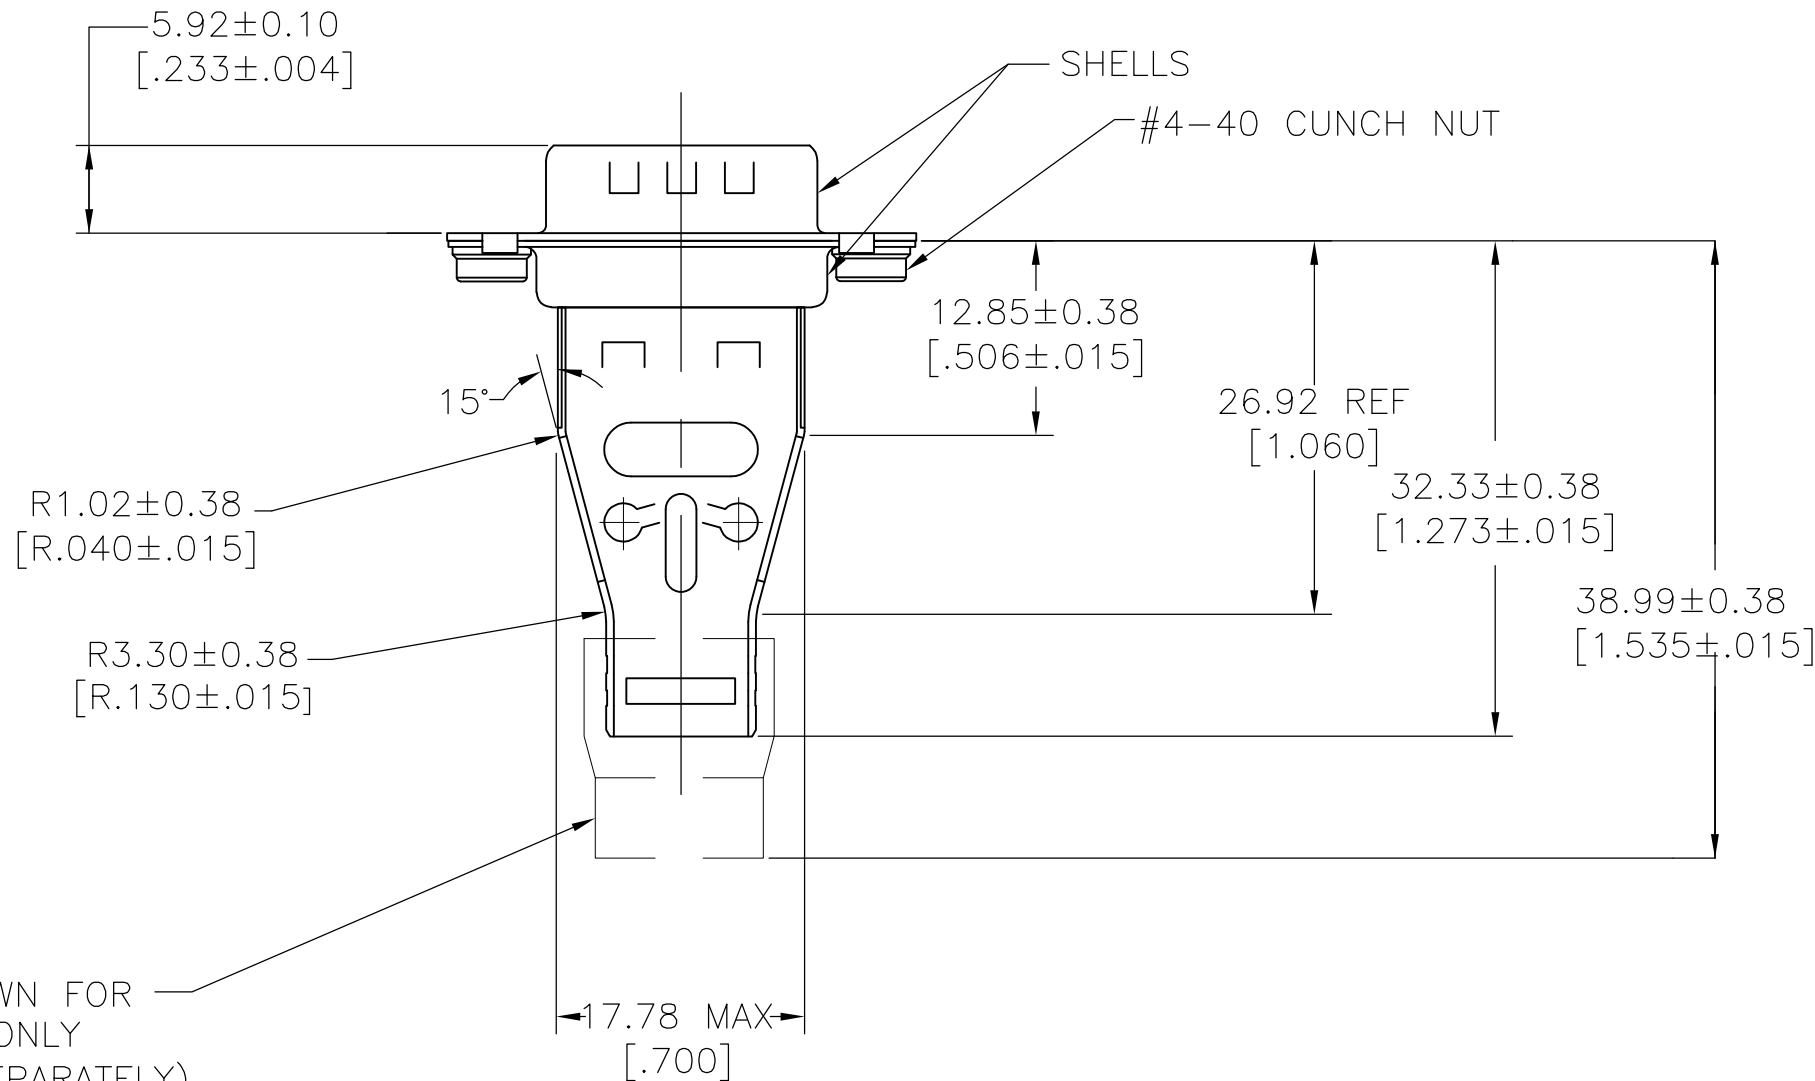

1658994-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MCMASTER 27JAN04	TE Connectivity			
DIMENSIONS: mm [INCHES]		CHK S. BOLASH 27JAN04				
		APVD M. WALMSLEY 27JAN04				
		PRODUCT SPEC				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	NAME KIT, PLUG, SHIELDING HARDWARE, 15 POSN, SIZE 1, CLINCH NUTS, HDP-22, AMPLIMITE			
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13[.005] 3 PLC ± - 4 PLC ± - ANGLES ± 2°		FINISH	SIZE A2	CAGE CODE 00779	DRAWING NO C=1658994	RESTRICTED TO -
MATERIAL 3		4	WEIGHT 0.000000	SCALE 2:1	SHEET 1 of 1	REV A
CUSTOMER DRAWING						